



# BANDEX

## CABLE ACCESSORIES

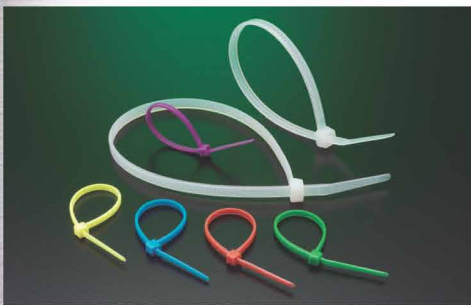

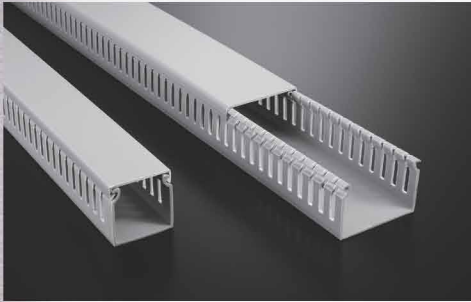

# BANDEX

## Cable Accessories



WIRING DUCTS 3



CABLE MARKERS 29



CABLE TIES AND ACCESSORIES 39



INSULATING 61



CABLE CLAMPS 65



GLANDS 81



BUSHINGS 111



WIRE CONNECTORS 123



INSULATING 127



CABLE CLIPS 139




PCB SPACERS AND SUPPORTS 149



FASTENERS 169




COPPER LUGS AND TERMINALS 191

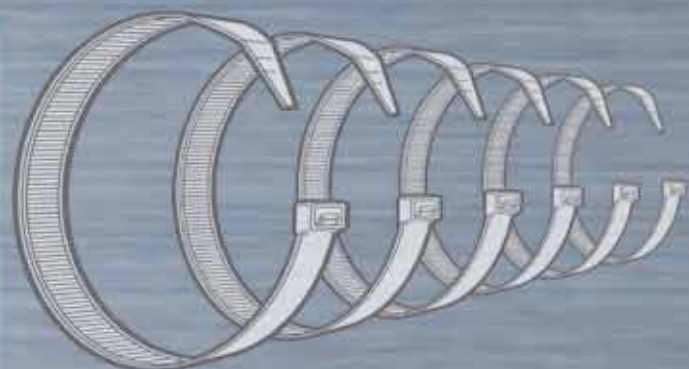

	ITEM	PAGE	ITEM	PAGE	ITEM	PAGE	ITEM	PAGE	ITEM	PAGE	ITEM	PAGE						
<b>A</b>	A	64	<b>D</b>	DP	58	<b>K</b>	K2	133	<b>N</b>	NFR	142	<b>P</b>	PRP	79	<b>S</b>	STV	53	
	AC	131		DR	167		KB	89		NFT	140		PRVS	55		SW	62	
	AG	82		DR	175		KCS	159		NFT	142		PS	155		SW	125	
	AG	83		DS	152		KFC	56		NFTT	142		PSP	119		SWC	77	
	AGJ	83	DT	21	KFS	56	NG	88	PST	160	SWS	161	<b>T</b>	SWT	124			
	AGJL	100	<b>E</b>	EB	155	KL	62	NHR2	136	PSV	55	TD		22				
	AGJ-SR	89		EBG	110	KT	63	NHR4	136	PTS	72	TE		15				
	AGJW	101		ECP	30	KT-1	114	NHS	137	PUV	55	TEE		16				
	AGL	100		ED	113	KTV	53	NJ	143	PV	54	TEI		16				
	AG-SR	89		EG	84	KUC	66	NK	141	PV-A	200	TEL		16				
	AGW	101		EGHL	100	KW	126	NPT	85	PWS	171	TEM		16				
	AP	71		EGL	100	KWS	170	NPTA	85	PWV	55	TEO		16				
	ARD	26		EG-SR	89	KWS	172	NPTL	100	PWVS	55	TET		16				
	ASTN	60		EGW	101	<b>L</b>	LB	200	NPT-SR	89	QB	147		TF	16			
	AT	57		ELBF	17		LCA	152	NPTW	101	QBS	147		TG	43			
	ATC	72		ELV-A	203		LCH	70	NS	144	<b>R</b>	R		192	TH	179		
	AWS	178		ELV-B	204		LCL	162	NT	140		RBG		109	THR	179		
<b>B</b>	B	64		EM	30		LCS	162	NT	142		RC		76	TM	67		
	B	201		EN	205		LD3	184	NU	143		RC		77	TMS	156		
	BC	131		EP	129		LDT	183	NU-N	141		RCL		77	TP	19		
	BCS	154		EPIN	198		LE	182	<b>O</b>	OC		36		RCS	177	TPE	20	
	BCT	59	ERF	195	LG		185	OD		22		RD	24	TPI	20			
	BD	7	ES	155	LG3		184	OM		32		RDA	25	TPL	20			
	BD	199	ES	173	LH		185	OMJ		34		RDCV	44	TPM	20			
	BE	154	ET	206	LHK		186	OMK		33		RDE	24	TPO	20			
	BF	202	EX	23	LHN		185	OMR		33		RDI	24	TPT	20			
	BG	104	EYF	196	LK		182	OMT		34		RDL	24	TR	180			
	BG-P	105	<b>F</b>	F32	135		LNK	148		OP		18	RDM	24	TRH	179		
	BGQ	105		F-A	198		LQ	183		OPC		18	RDO	24	TRW	182		
	BHS	202		FAB	104	LQT	183	OPE		18		RDT	24	TS	72			
	BL	205		FAM	104	LS	13	OPI		18		RF	194	TT	177			
	BM	30		FAP	104	LV-A	203	OPL		18	RH	175	TTB	178				
	BM	31		F-B	197	LV-B	204	OPM		18	RHR	121	TTU	177				
BMB	31	FBG		109	LWS	176	OPO	18		RJ45	190	TV	45					
BMS	156	FC		73	LX	183	OPT	18		RLS	153	TW	181					
BN	202	FC		74	LY	184	OS	17		RRCV	52	TWS	174					
BPA	101	FC		78	LY	197	OSB	117	RS	153	UD	9						
BST	59	FCP		78	LYF	197	OV	22	RSB	117	UM	37						
BSTC	59	FCT		51	<b>M</b>	M	64	<b>P</b>	P	86	RSP	167	UY	190				
BT	52	FCT		78		M	86		PA	201	RT	48	USTN	60	<b>V</b>	V	128	
BT	157	FCW		78		M	87		PAO	106	RTF	28	USB	121		VC	75	
BWS	174	FD		8		MAT	56		PAQ	106	RTFL	28	USB	122		VC	76	
<b>C</b>	C	207		FL-A		204	MB		37	PB	160	RTFM	28	UY		190	VP	45
	CAP	188	FLN-A	204		MB	112		PBG	110	RV	47	VT	128		W3F2	134	
	CATV	75	FMR	34		MBC	112		PC	66	RVC	48	<b>W</b>	WB		63		
	CC	66	FR	122		MBH	112		PCC	174	RW	181		WBS		63	WBT	63
	CD	26	FZ	135		MB-N	112		PCU	163	RWS	175		WCT		54	WD	4
	CDW	181	<b>G</b>	GD		7	MC		35	PCV	55	SB		114		WD	10	
	CE	124		GE		119	MCR		108	PD	8	SB		115		WD	14	
	CF	107		GEC		119	MCS		150	PDV	55	SCA		130		WDC	6	
	CL	78		GECQ		119	MF		199	PET	64	SCM		134		WDE	11	
	CL	208		GEQ		119	MFC		74	PEV	55	SCP		130		WDE	14	
	CLV	197		GM		31	MG		108	PF	189	SCS		154		WDI	11	
	CM	37		GM		120	MGT		57	PFS	71	SCT		46		WDI	14	
	CR	107		GMC	120	MGTP	57	PFVS	55	SD	11	WDL		11				
	CRS	107		GMCQ	120	MH	102	PGV	55	SDH	11	WDL		14				
	CS	150		GMQ	120	MHVC	45	PH	168	SFC	77	WDM		11				
	CS	152		GS	161	MID	8	PHC	69	SGN	120	WDM		14				
CSA	152	<b>H</b>		H	196	MMR	157	PHV	49	SHW	80	WDO		11				
CT	40-43			HBW	180	MMS	157	PIN	198	SN	166	WDO		14				
CTF	56			HF	196	MNC	145	PL	177	SNB	64	WDO	14					
CT-PP	42			HGS	160	MNK	148	PLD	187	SNK	148	WDT	11					
CTT	40			HID	8	MP	35	PLM	187	SP	151	WDT	14					
CTT	176		HL	173	MPD	8	PLR	188	SPA	151	WH	75						
CVS	57		HM	138	MPM	68	PLT	188	SPB	151	WM	36						
CW	79		HMS	156	MS	32	PLU	186	SPC	151	WMB	36						
CWC	79		HP	118	MS	156	PLW	187	SPD	151	WR	180						
CWP	68		HPA	122	MSC	100	PLX	187	SPR	178	WS	171						
<b>D</b>	DC		5	HPM	130	MSP	118	PMB	49	SPS	159	WT	9					
	DCC		76	HR	121	MT	44	PMT	47	SR	6	<b>Y</b>	Y	194				
	DCI		12	HRCV	49	MV	46	PN	189	SR	113		YF	195				
	DCP		12	HS	132	MV	129	PN-A	202	SR	114		2 HOLES	90				
	DCPT		12	HSP	132	MWC	79	PN-B	203	SR	163		3 HOLES	92				
	DCQ		5	HTN	159	<b>N</b>	NBG	109	PNF	146	SR		164	4 HOLES	94			
	DCV	44	HTP	158	NBGC		110	PNK	146	SR	165		5 HOLES	96				
	DF	21	HTS	158	NC		144	PP	146	SRD	27		6 HOLES	98				
	DH	69	HVD	5	NF		140	PPC	80	SSA3	133		7 HOLES	99				
	DK	51	<b>J</b>	JD	21		NF	142	PR	122	ST		176					
	DL	50		JM	38		NF	143										
	DN	166		J-S	70		NFD	142										
	DNF	144		JWB	170		NFD	143										
	DNR	145		JWS	170		NFP	143										

**BANDEX** Cable Accessories


# WIRING DUCTS

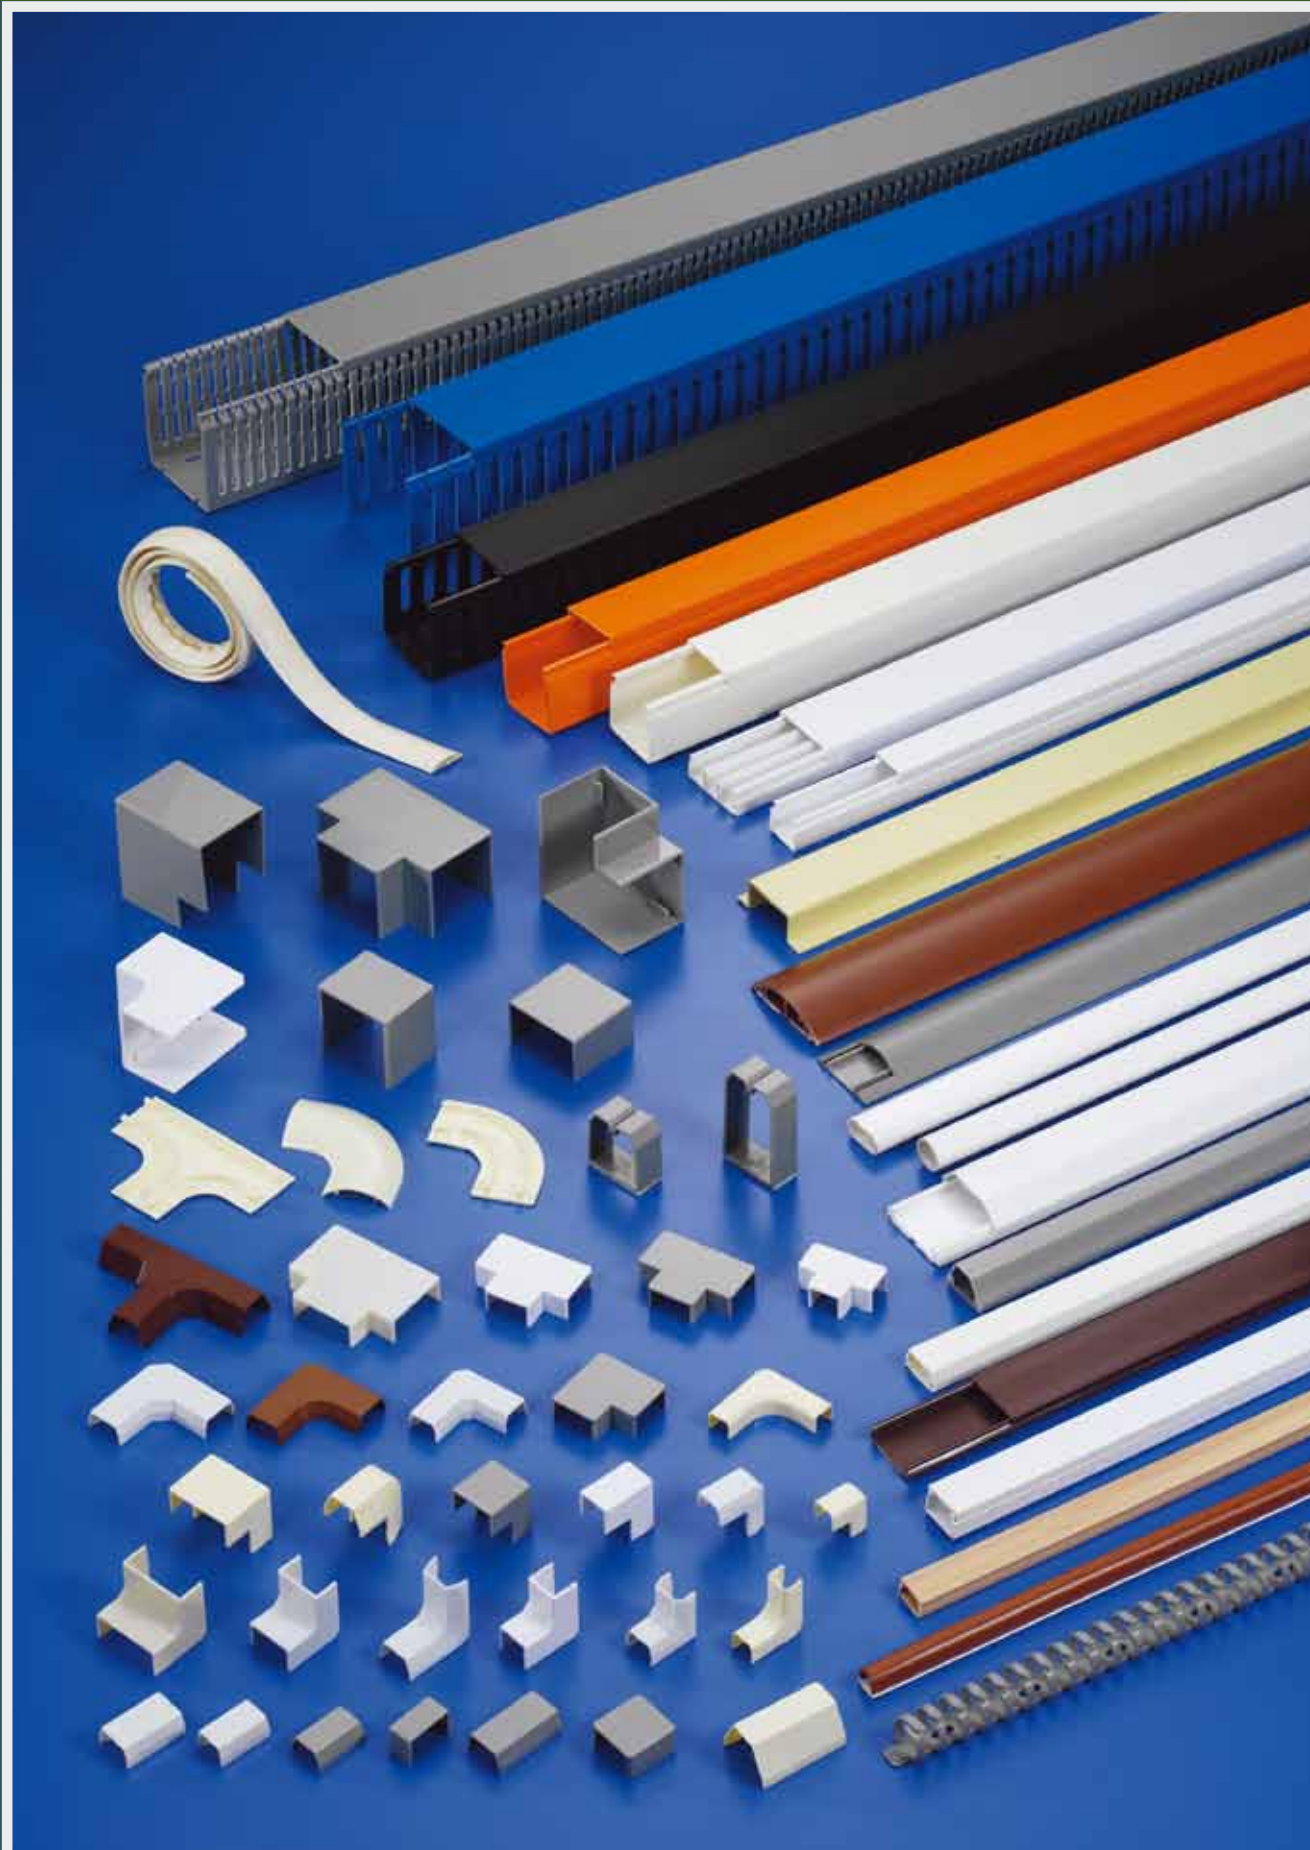

## OPEN SLOTTED WIRING DUCTS


Unit: mm

Size W×H	L	Wires to be Contained 16-14 AWG	Part No.		
			4mm	6mm	8mm
15×25		5-12pcs	WD-1525-4		WD-1525-8
20×20		5-12pcs	WD-2020-4		WD-2020-8
25×25		10-25pcs	WD-2525-4		WD-2525-8
25×30		15-25pcs			WD-2530-8
25×40		20-25pcs			WD-2540-8
25×45		20-25pcs	WD-2545-4	WD-2545-6	WD-2545-8
25×60		40-45pcs			WD-2560-8
25×65		40-45pcs	WD-2565-4	WD-2565-6	WD-2565-8
25×80		100-120pcs			WD-2580-8
30×30		15-25pcs	WD-3030-4		WD-3030-8
33×33		25-45pcs	WD-3333-4	WD-3333-6	WD-3333-8
33×40		40-45pcs			WD-3340-8
33×45		40-55pcs	WD-3345-4	WD-3345-6	WD-3345-8
33×65		60-75pcs	WD-3365-4	WD-3365-6	WD-3365-8
33×100		180-200pcs	WD-33100-4		WD-33100-8
37.5×100		180-205pcs			WD-37100-8
40×40		60-70pcs		WD-4040-6	WD-4040-8
40×60		100-115pcs		WD-4060-6	WD-4060-8
40×80		120-135pcs			WD-4080-8
40×100		130-175pcs			WD-40100-8
45×45		60-70pcs	WD-4545-4	WD-4545-6	WD-4545-8
45×65		110-120pcs	WD-4565-4	WD-4565-6	WD-4565-8
48×100		215-250pcs	WD-48100-4	WD-48100-6	WD-48100-8
50×50		80-90pcs	WD-5050-4		WD-5050-8
55×100		220-260pcs			WD-55100-8
60×40		100-115pcs			WD-6040-8
60×60		120-135pcs	WD-6060-4	WD-6060-6	WD-6060-8
60×80	2M	180-210pcs			WD-6080-8
60×100		240-290pcs			WD-60100-8
65×45		110-120pcs	WD-6545-4	WD-6545-6	WD-6545-8
65×65		180-200pcs	WD-6565-4	WD-6565-6	WD-6565-8
70×100		250-300pcs			WD-70100-8
72×64		200-220pcs			WD-7264-8
75×75		200-250pcs			WD-7575-8
75×100		260-320pcs			WD-75100-8
80×40		120-135pcs			WD-8040-8
80×60		180-210pcs			WD-8060-8
80×80		240-290pcs			WD-8080-8
80×100		260-350pcs			WD-80100-8
100×40		130-175pcs			WD-10040-8
100×50		200-250pcs			WD-10050-8
100×60		240-290pcs			WD-10060-8
100×75		260-320pcs			WD-10075-8
100×80		260-350pcs			WD-10080-8
100×100		300-400pcs	WD-100100-4	WD-100100-6	WD-100100-8
120×60		240-290pcs			WD-12060-8
120×65		260-360pcs			WD-12065-8
120×75		280-380pcs			WD-12075-8
120×80		300-400pcs			WD-12080-8
150×75		335-500pcs			WD-15075-8
150×100		450-600pcs			WD-150100-8
200×100		600-800pcs			WD-200100-8
200×150		1040-1200pcs			WD-200150-8
200×200		1200-1600pcs			WD-200200-8
300×100		1040-1200pcs			WD-300100-8

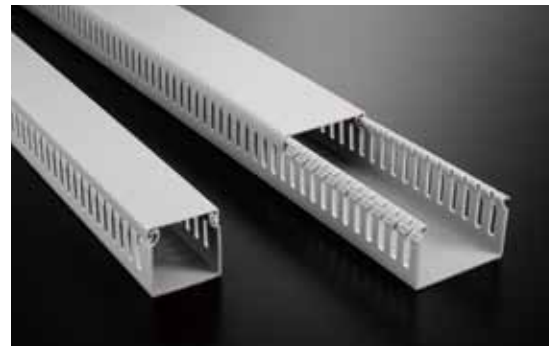


- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey.
- Test to UL file E156597 to 50°C
- These devices are for routing of wires within devices in factory installations.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request of reasonable quantity.
- ※ Regular wiring duct cover can be upgrade to NON-SLIP ones which improves tightness between duct and cover. Suitable for vertical installations, improves effectiveness and avoid cover slip off.
- ※ For size wider than 125mm, please call for order.
- Item no. : WD-1525→WQ-1525
- ※ For wiring Duct with score line, add a "V" after part No. For example: WDV-1525


### SLOT : 8mm

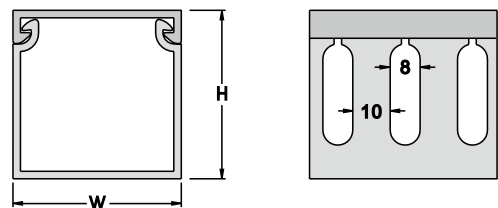

### SLOT : 6mm

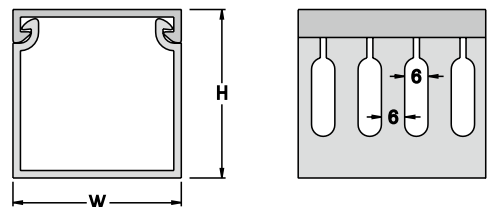



### SLOT : 4mm

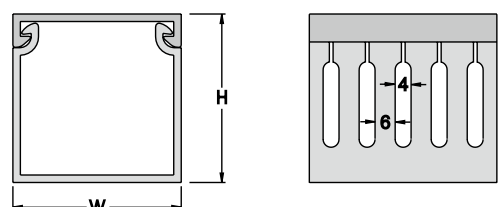

# OPEN SLOTTED WIRING DUCTS

Unit: mm

Size	L	Wires to be Contained	Part No.	Size	L	Wires to be Contained	Part No.
W×H		16-14 AWG	4mm	W×H		16-14 AWG	4mm
25×30	2M	15-25pcs	HVD-1	100×60	2M	240-290pcs	HVD-9.5
30×30		15-25pcs	HVD-1.5	120×60		240-290pcs	HVD-9.6
25×40		20-25pcs	HVD-2	120×65		260-360pcs	HVD-9.65
33×40		40-45pcs	HVD-3	25×80		100-120pcs	HVD-9.66
40×40		60-70pcs	HVD-4	40×80		120-135pcs	HVD-9.7
60×40		100-115pcs	HVD-5	60×80		180-210pcs	HVD-9.8
80×40		120-135pcs	HVD-5.5	80×80		240-290pcs	HVD-10
100×40		130-175pcs	HVD-5.7	100×80		260-350pcs	HVD-10.5
25×60		40-45pcs	HVD-6	120×80		300-400pcs	HVD-11
40×60		100-115pcs	HVD-7	40×100		130-175pcs	HVD-12
60×60		120-135pcs	HVD-8	60×100		240-290pcs	HVD-13
80×60		180-210pcs	HVD-9	80×100		260-350pcs	HVD-14

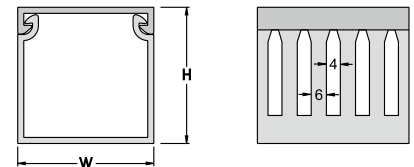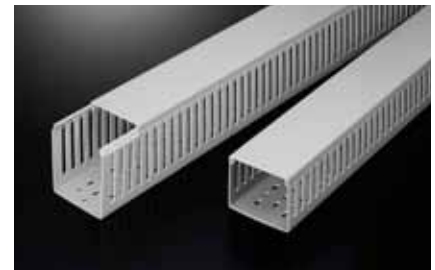


- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey.
- These devices are for routing of wires within devices in factory installations.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request of reasonable quantity.
- ※Regular wiring duct cover can be upgrade to NON-SLIP ones which improves tightness between duct and cover. Suitable for vertical installations, improves effectiveness and avoid cover slip off.
- ※For size wider than 125mm, please call for order.
- Item no. : HVD-11→HVQ-11
- ※For wiring Duct with score line, add a "V" after part No. For example: HVDV-11

# WIRING DUCT COVER

Unit: mm

Part No.	Width Size	Length	Part No.	Width Size	Length
DC-15L	15	2m	DC-65L	65	2m
DC-16L	16		DC-70L	70	
DC-20L	20		DC-72L	72	
DC-25L	25		DC-75L	75	
DC-33L	33		DC-80L	80	
DC-38L	38		DC-100L	100	
DC-40L	40		DC-120L	120	
DC-45L	45		DC-150L	150	
DC-48L	48		DC-200L	200	
DC-50L	50		DC-300L	300	
DC-60L	60				

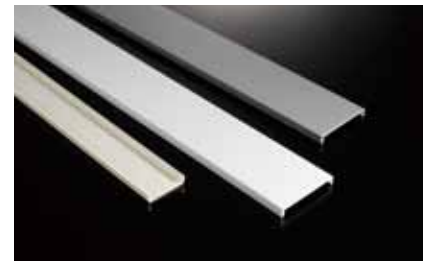


# NON-SLIP WIRING DUCT COVER

Unit: mm

Part No.					Length
DCQ-20L	DCQ-40L	DCQ-60L	DCQ-75L	DCQ-125L	2m
DCQ-25L	DCQ-45L	DCQ-65L	DCQ-80L		
DCQ-30L	DCQ-50L	DCQ-70L	DCQ-100L		
DCQ-33L	DCQ-55L	DCQ-72L	DCQ-120L		


- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey
- Feature: Neat and stable gluey layer inside duct cover tightens the base and cover won't slide easily and stays in place for vertical orientation. Installation will be convenient and safe.

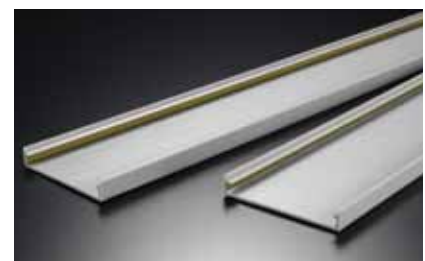


## CLOSED SLOTTED WIRING DUCTS

Unit: mm


Part No.		W×H	Wires to be Contained 16-14 AWG	Length
Slot (8mm)	Slot (17mm)			
WDC-2530-8		25×30	15~25 pcs	2m
WDC-4040-8		40×40	60~70 pcs	
WDC-8040-8		80×40	120~135 pcs	
WDC-5050-8		50×50	80~90 pcs	
WDC-2560-8		25×60	40~45 pcs	
WDC-4060-8	WDC-4060-17	40×60	100~115 pcs	
WDC-6060-8	WDC-6060-17	60×60	120~135 pcs	
WDC-8060-8	WDC-8060-17	80×60	180~210 pcs	
	WDC-3365-17	33×65	60~75 pcs	
	WDC-4565-17	45×65	110~120 pcs	
	WDC-6565-17	65×65	180~200 pcs	
WDC-4080-8	WDC-4080-17	40×80	120~135 pcs	
WDC-6080-8	WDC-6080-17	60×80	180~210 pcs	
WDC-8080-8	WDC-8080-17	80×80	240~290 pcs	
	WDC-33100-17	33×100	180~200 pcs	
WDC-40100		40×100	130~175 pcs	
	WDC-48100-17	48×100	215~250 pcs	
WDC-100100-8	WDC-100100-17	100×100	300~400 pcs	

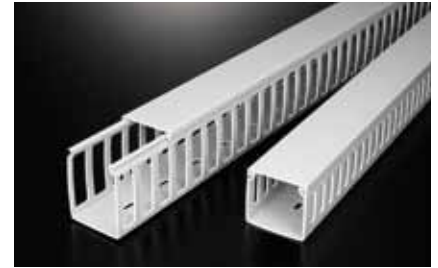

### SLOT : 8mm

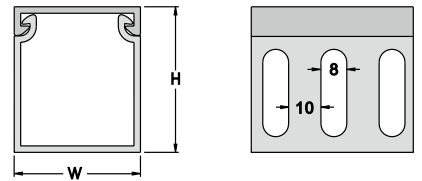

### SLOT : 17mm

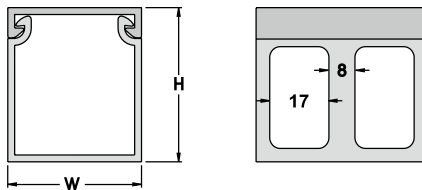

- Close slot design facilitate easy installation or removal of cover.
- Larger slot suitable for big wire, and vaporize the heat from cables much quickly.
- Slot can be cut when enlarge slot is necessary.

※Regular wiring duct cover can be upgrade to NON-SLIP ones which improves tightness between duct and cover. Suitable for vertical installations , improves effectiveness and avoid cover slip off.


Item no. : WDC-2530▶WQC-2530

## SNAP RIVET

Unit: mm

Part No.	A	B	Panel thickness	Packing
SR-0612K	6.2	12.3	7.0-10.0	1000pcs
SR-0815K	8.0	14.0	7.0-12.0	

- Material: UL approved Nylon 66 94V-2
- Color: Black

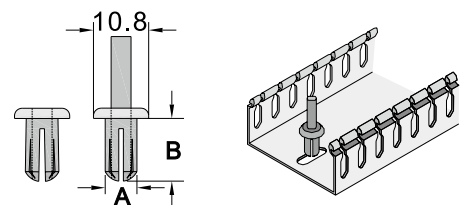


# OPEN SLOT WIRING DUCT

Unit: mm

Part No.	W×H	Wires to be Contained 16-14 AWG	Length
Slot (4mm)			
BD-2525	25×25	10~25pcs	2M
BD-3340	33×40	40~45pcs	
BD-4040	40×40	50~60pcs	
BD-3360	33×60	60~70pcs	
BD-4860	48×60	110~120pcs	
BD-6060	60×60	120~135pcs	



- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey.
- Test to UL file E156597 to 50°C
- These devices are for routing of wires within devices in factory installations.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.

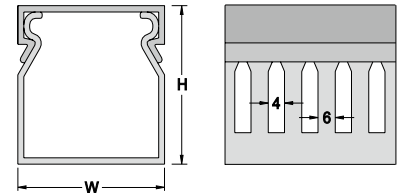

# OPEN SLOT WIRING DUCT

Unit: mm



Part No.	W×H	Wires to be Contained 16-14 AWG	Length
Slot (4.5mm)			
GD-3060	30 X 60	30~50pcs	2M
GD-4060	40 X 60	100~115pcs	
GD-6060	60 X 60	110~120pcs	
GD-8060	80 X 60	180~210pcs	
GD-10060	100 X 60	240~290pcs	
GD-12060	120 X 60	240~290pcs	
GD-3080	30 X 80	110~115pcs	
GD-4080	40 X 80	120~135pcs	
GD-6080	60 X 80	180~210pcs	
GD-8080	80 X 80	240~290pcs	
GD-10080	100 X 80	260~350pcs	
GD-12080	120 X 80	300~400pcs	



- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey.
- Test to UL file E156597 to 50°C
- 4.5mm SLOT with score line.

※Regular wiring duct cover can be upgrade to NON-SLIP ones which improves tightness between duct and cover. Suitable for vertical installations, improves effectiveness and avoid cover slip off.

Item no. : GD-3060→GQ-3060

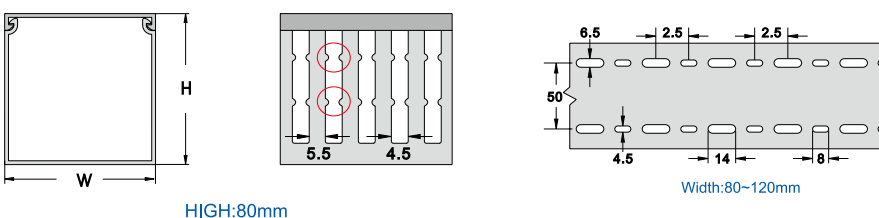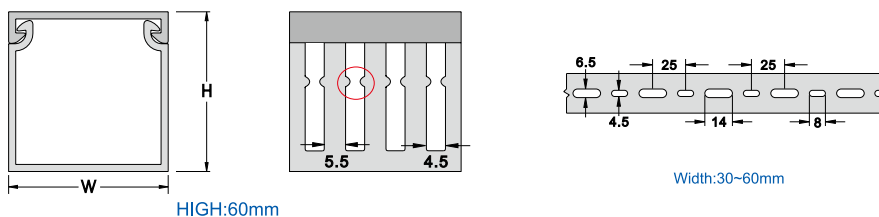

HIGH:60mm

HIGH:80mm


## OPEN SLOT WIRING DUCTS

Unit: mm


Size W×H	L	Wires to be Contained 16-14 AWG	Part No.			
			8mm	5mm	8mm	4mm
25×30	2M	15-25pcs			MID-2530	
25×40		20-25pcs			MID-2540	
25×50		20-25pcs	MPD-2550	PD-2550		
25×60		40-45pcs				HID-2560
25×75		60-75pcs	MPD-2575	PD-2575		
25×80		60-75pcs				HID-2580
40×80		120-135pcs				HID-4080
50×50		80-90pcs	MPD-5050	PD-5050		
50×75		180-200pcs	MPD-5075	PD-5075		
60×80		180-210pcs				HID-6080
75×75		200-250pcs	MPD-7575	PD-7575		
100×100		300-400pcs	MPD-100100	PD-100100		




MPD : 8mm

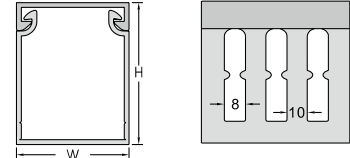


PD : 5mm

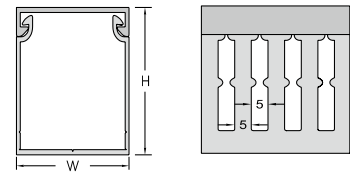

MID : 8mm

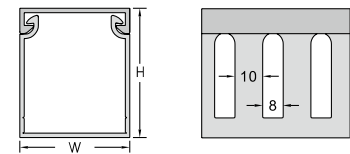

HID : 4mm

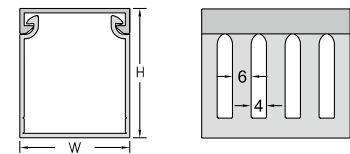

- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
  - Color: Grey
  - Double Score lines: The restricted slot, sidewall design is scored at the base of each finger and the base of duct. It is easy for the user to break finger from the base to enlarge bundle of wire.
  - Pinch Points: To separate the wires from top and bottom to avoid the wires tangled.
  - Narrow and Larger Fingers: Both are available to supply the installer for different application.
  - Outward sidewall design: Provide the resistance to prevent the cover/lid slipping off.
- ※ Regular wiring duct cover can be upgrade to NON-SLIP ones which improves tightness between duct and cover. Suitable for vertical installations, improves effectiveness and avoid cover slip off.
- Item no. : MPD-2550→MPQ-2550、PD-2550→PQ-2550、  
MID-2530→MIQ-2530、HID-2560→HIQ-2560



## FLEXIBLE WIRING DUCT

Unit: mm

Part No.	W	H	Wires to be Contained 16-14 AWG	Length
FD-20	20.4	14.4	5~12 pcs	50cm
FD-30	29	24.9	12~30 pcs	



- Material: UL approved Nylon 66 94V-2
- Color: Grey.
- Feature: connector design at both end, Ducts can conjoint each other.

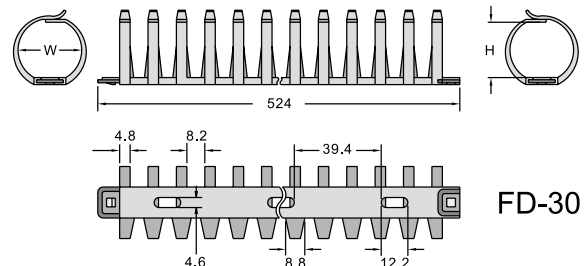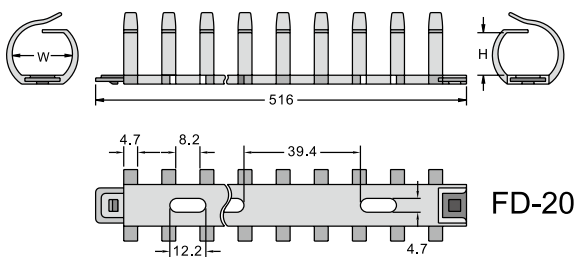


# MINI TRUNKING

Unit: mm

Part No.	W×H	Wires to be Contained 16-14 AWG	Length
UD-1809WE	18×9	2-6 pcs	2M
UD-1616WE	16×16	3-10 pcs	
UD-2516WE	25×16	5-12 pcs	
UD-4016WE	40×16	20-35 pcs	
UD-4025WE	40×25	20-40 pcs	
UD-5025WE	50×25	25-45 pcs	




- Material : High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color : White.
- Solid type can protect wire from external damage such like dust or mouse.

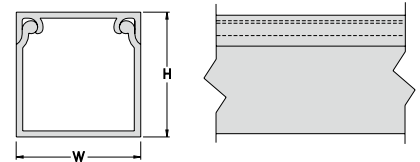

# WIRING DUCT CUTTING TOOL

Part No. : WT-1

Part No. : WT-2

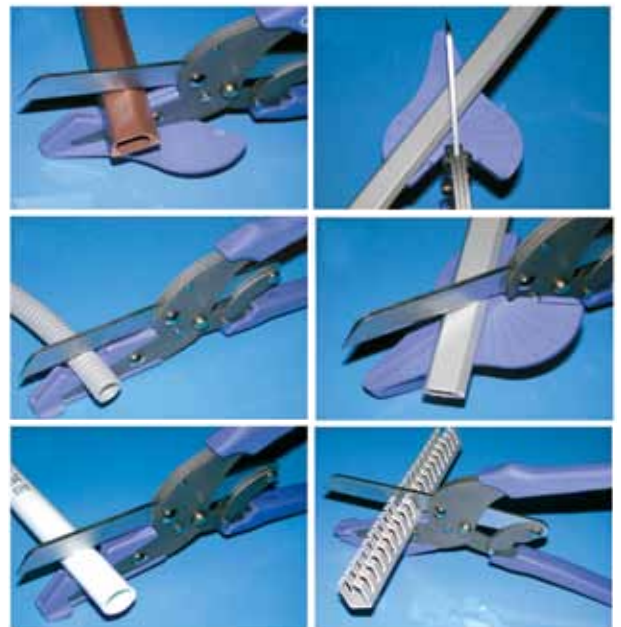

### SOLID TRUNKING

Unit: mm

Part No.	W×H	Wires to be Contained 16-14 AWG	L	Part No.	W×H	Wires to be Contained 16-14 AWG	L
	mm				mm		
WD-2210-0	22x10	3-8pcs	2m	WD-2565-0	25x65	40-45pcs	2m
WD-3015-0	30x15	10-25pcs		WD-3365-0	33x65	60-75pcs	
WD-1616-0	16x16	3-10pcs		WD-4565-0	45x65	110-120pcs	
WD-2516-0	25x16	5-12pcs		WD-6565-0	65x65	180-200pcs	
WD-3816-0	38x16	12-30pcs		WD-12065-0	120x65	260-350pcs	
WD-2020-0	20x20	5-12pcs		WD-2575-0	25x75	50-55pcs	
WD-4020-0	40x20	20-40pcs		WD-3775-0	37.5x75	110-115pcs	
WD-1525-0	15x25	5-12pcs		WD-5075-0	50x75	180-200pcs	
WD-2525-0	25x25	10-25pcs		WD-7575-0	75x75	200-250pcs	
WD-3825-0	38x25	20-40pcs		WD-10075-0	100x75	260-320pcs	
WD-5025-0	50x25	25-45pcs		WD-12075-0	120x75	280-380pcs	
WD-2530-0	25x30	15-25pcs		WD-12575-0	125x75	280-380pcs	
WD-3030-0	30x30	20-40pcs		WD-15075-0	150x75	335-500pcs	
WD-10030-0	100x30	130-160pcs		WD-2580-0	25x80	60-75pcs	
WD-3333-0	33x33	25-45pcs		WD-4080-0	40x80	120-135pcs	
WD-10033-0	100x33	180-200pcs		WD-6080-0	60x80	180-210pcs	
WD-3838-0	38x38	45-50pcs		WD-8080-0	80x80	240-290pcs	
WD-2540-0	25x40	20-25pcs		WD-10080-0	100x80	260-350pcs	
WD-3340-0	33x40	40-45pcs		WD-12080-0	120x80	300-400pcs	
WD-4040-0	40x40	60-70pcs		WD-33100-0	33x100	180-200pcs	
WD-6040-0	60x40	100-115pcs		WD-37100-0	37.5x100	180-200pcs	
WD-7540-0	75x40	120-135pcs		WD-40100-0	40x100	130-175pcs	
WD-8040-0	80x40	120-135pcs		WD-48100-0	48x100	215-250pcs	
WD-10040-0	100x40	130-175pcs		WD-50100-0	50x100	210-260pcs	
WD-2545-0	25x45	20-25pcs		WD-55100-0	55x100	220-260pcs	
WD-3345-0	33x45	40-55pcs		WD-60100-0	60x100	240-290pcs	
WD-4545-0	45x45	60-70pcs		WD-70100-0	70x100	250-300pcs	
WD-6545-0	65x45	110-120pcs		WD-75100-0	75x100	260-350pcs	
WD-2550-0	25x50	20-30pcs		WD-80100-0	80x100	260-350pcs	
WD-3850-0	38x50	20-35pcs		WD-100100-0	100x100	300-400pcs	
WD-5050-0	50x50	80-90pcs		WD-100100J-0	100x100	300-400pcs	
WD-7550-0	75x50	180-200pcs		WD-150100-0	150x100	450-600pcs	
WD-8050-0	80x50	180-200pcs		WD-150100J-0	150x100	450-600pcs	
WD-10050-0	100x50	200-260pcs		WD-200100-0	200x100	600-800pcs	
WD-2560-0	25x60	40-45pcs		WD-300100-0	300x100	1040-1200pcs	
WD-4060-0	40x60	100-115pcs		WD-200150-0	200x150	1040-1200pcs	
WD-6060-0	60x60	120-135pcs		WD-200200-0	200x200	1200-1600pcs	
WD-8060-0	80x60	180-210pcs					
WD-10060-0	100x60	240-290pcs					
WD-12060-0	120x60	240-290pcs					
WD-15060-0	150x60	310-480pcs					
WD-7264-0	72x64	200-220pcs					




**SOLID:** No slot design, for external wiring or where wire extraction is not necessary.

- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey.
- Test to UL file E156597 to 50°C
- These devices are for routing of wires within devices in factory installations.
- Solid type can protect wire from external damage such dust or mouse.
- Special color, size, length upon request at reasonable quantity.

※ Regular wiring duct cover can be upgrade to NON-SLIP ones which improves tightness between duct and cover. Suitable for vertical installations, improves effectiveness and avoid cover slip off.

※ For size wider than 125mm, please call for order.

Item no. : WD-2210▶WQ-2210

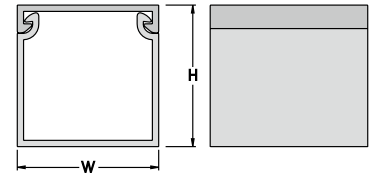


※ WD-100100J、WD-150100J is thicker wall type.

# CONNECTORS



Unit: mm

- Material: UL approved ABS, 94HB
- A wide range of connectors are available, please contact our office for more details.

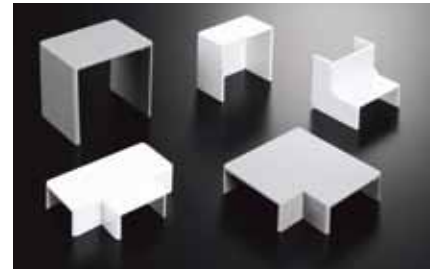

Connectors	Type	Part No.	Used With	Packing	Connectors	Type	Part No.	Used With	Packing		
	MID-WAY CONNECTOR	WDM-1616	WD-1616	20 pcs		OUTSIDE CORNER	WDO-1616	WD-1616	20 pcs		
		WDM-2516	WD-2516				WDO-2516	WD-2516			
		WDM-3816	WD-3816				WDO-3816	WD-3816			
		WDM-4040	WD-4040				WDO-4040	WD-4040			
		WDM-5050	WD-5050				WDO-5050	WD-5050			
		WDM-7575	WD-7575				WDO-7575	WD-7575			
	"T" TYPE	WDT-1616	WD-1616		20 pcs		"L" TYPE	WDL-1616		WD-1616	20 pcs
		WDT-2516	WD-2516					WDL-2516		WD-2516	
		WDT-3816	WD-3816					WDL-3816		WD-3816	
		WDT-4040	WD-4040					WDL-4040		WD-4040	
		WDT-5050	WD-5050					WDL-5050		WD-5050	
		WDT-7575	WD-7575					WDL-7575		WD-7575	
	OUTSIDE CORNER	WDI-1616	WD-1616	20 pcs		END PIECE	WDE-1616	WD-1616	20 pcs		
		WDI-2210D	WD-2210				WDE-2210	WD-2210			
		WDI-2516	WD-2516				WDE-2516	WD-2516			
		WDI-3816	WD-3816				WDE-3816	WD-3816			
		WDI-4040	WD-4040				WDE-4040	WD-4040			
		WDI-5050	WD-5050				WDE-5050	WD-5050			
		WDI-7575	WD-7575				WDE-7575	WD-7575			


# SOLID TRUNKING

Unit: mm

Part No.		W×H	Wires to be Contained	L
Solid	Mounting hole	mm	16-14 AWG	
SD-300100J	SDH-300100J	300 X 100	1040~1200pcs	2m (3M available upon request)
SD-400100	SDH-400100	400 X 100	1380~1600pcs	
SD-500100J	SDH-500100J	500 X 100	1730~2000pcs	
SD-600100	SDH-600100	600 X 100	2080~2400pcs	




- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0 & M1 non flammability.
- Color: Grey.
- Features: Special designed hook and slot base, makes installation more easier and faster. Can be apply with L type coupler, makes conjunction of wiring ducts more stronger and neatly.
- Fixing slot on duct base can vaporize the heat arised from cables faster. Suitable for cables used in big project.

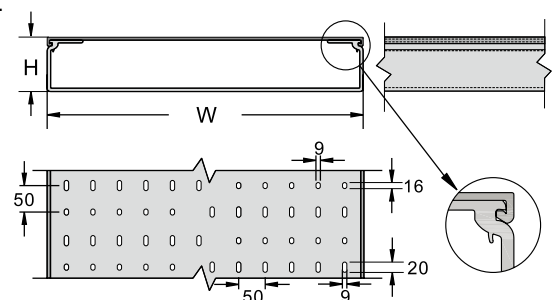

## SOLID TRUNKING COUPLER

Part No.	A	B	Length	Used With
				SDH duct Height
▲ DCP-100	40.5	75.5	350	100 mm
DCP-60A		43	170	60 mm
DCP-100A		75	184.6	100 mm
DCI-60		43	130	60 mm
DCI-100		75	160	100 mm
DCPT-1		58.5	190	100 mm

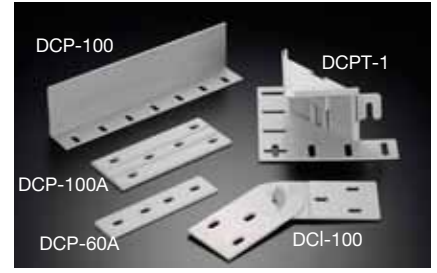


● Material: UL approved ABS, 94HB


● Color: Grey.

▲ DCP-100 UL recognized PVC material with flammability rating of M1 and 94V-0 for vicat temperature of 85°C.

※ Applied with screw PF-823HNGYJ and nut PN-8HNGYJ

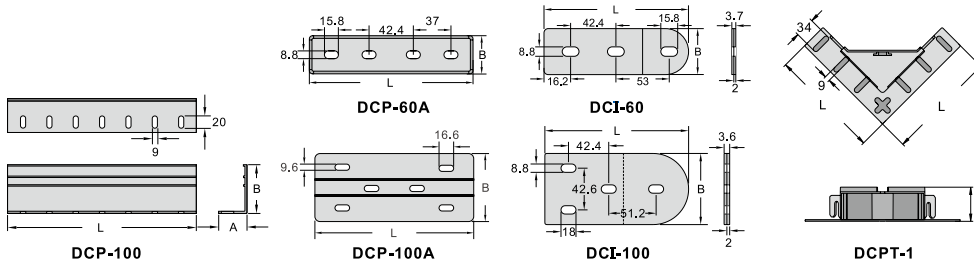

## WIRING DUCT CONNECTOR

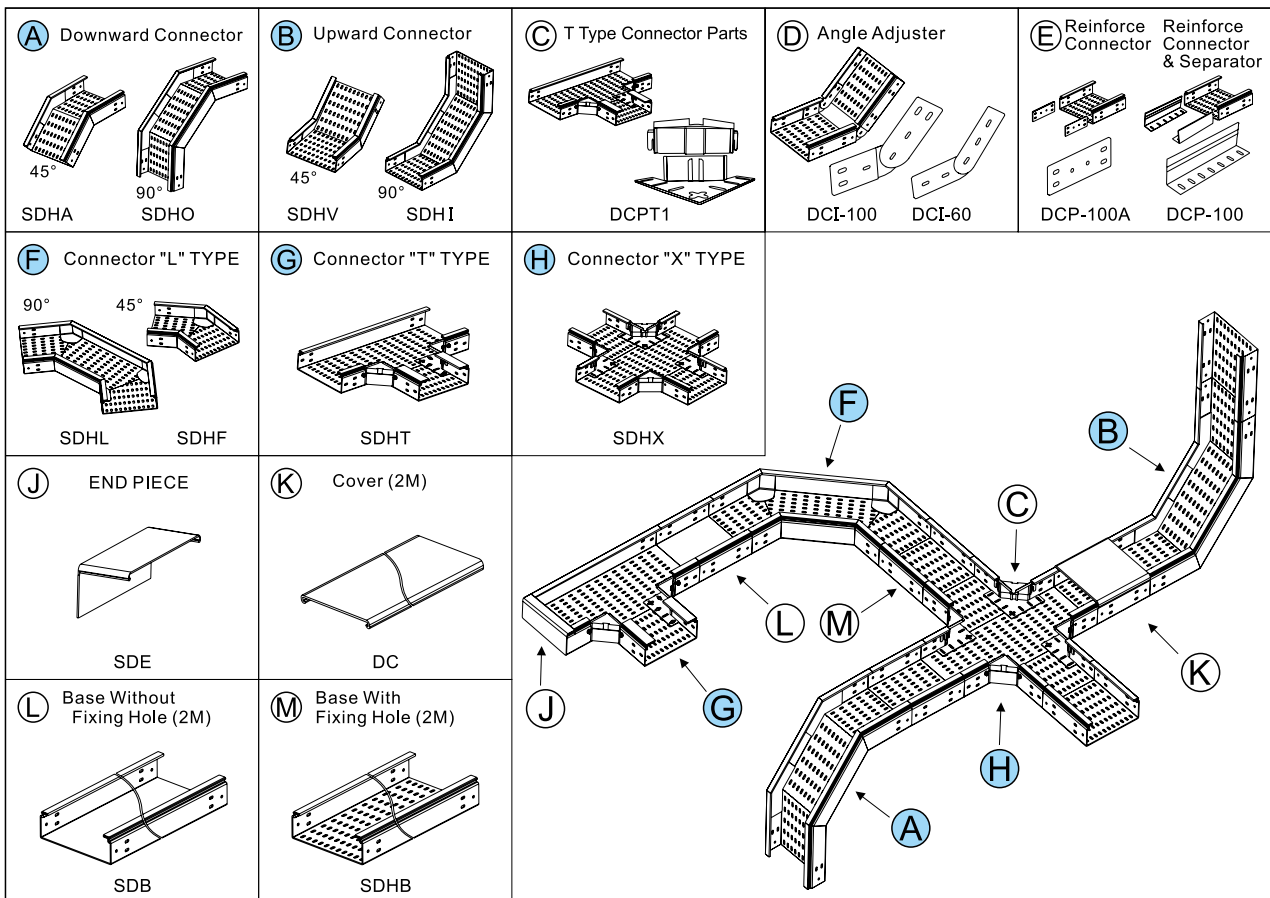

Other types of wiring duct can be customized.

From the connectors (A B F G H) they include duct cover and duct base. If you order duct base only, please add a "B" behind the model number.


For example : Wiring Duct model no. SDH-400100, if including whole set connector no. SDHA-400100

Duct base model no. SDHAB-400100, duct cover model no. DCA-400100


# WIRING RETAINER

Unit: mm

Part No.	W×H	Packing
	mm	
LS-2040	20×40	100 pcs With Adhesive Tape
LS-4040	40×40	
LS-7040	70×40	
LS-2065	20×65	
LS-4065	40×65	
LS-6565	65×65	

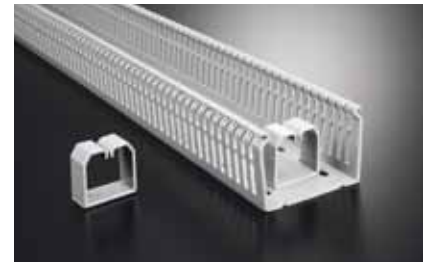

- Material: UL approved ABS, 94HB
- Color: Grey.
- Fix wire saddle by screw first and put wires inside.
- To make wires in good order and neatly.




# WIRING RETAINER

Unit: mm

Part No.	W×H	Packing
	mm	
LS-4267	46×69	50 pcs



- Material: UL approved ABS, 94HB
- Color: Black.
- Fix wire saddle by screw first and put wires inside.
- To make wires in good order and neatly.




## COMPUTER DUCTING & RACEWAYS

Unit: mm

Part No.	W	H	W1	W2	W3	Length
WD-2010-2WE	20	10.3	7.5	7.5		2M
WD-3010-2WE	30	11.2	12.5	12.5		
WD-4010-3WE	40	10.3	11	11.5	11.5	
WD-5020-3WE	50.8	20.3	14.8	10	14.8	
WD-10040-3WE	100	40	32.8	23.2	32.8	
※WD-11060WE	111	61.4	43.3	16	43.3	



- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: White
- ※ WD-11060WE without divider wall

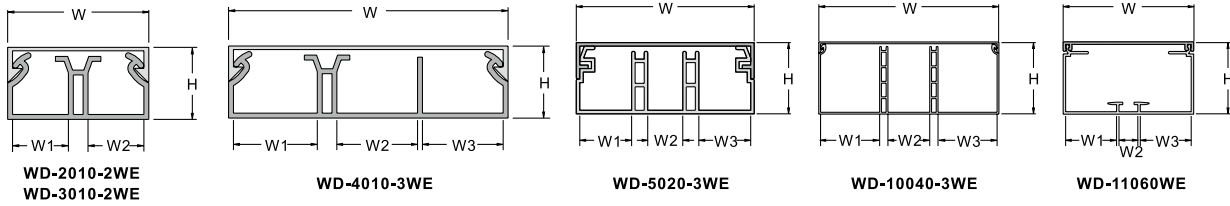

## WIRING DUCT CONNECTOR

Unit: mm

- Material: UL approved ABS, 94HB
- Color: White




Connectors	Type	Part No.	Used With	Packing
	MID-WAY CONNECTOR	WDM-2010WE	WD-2010-2WE	20 pcs
		WDM-3010WE	WD-3010-2WE	
		WDM-4010WE	WD-4010-3WE	
		WDM-5020WE	WD-5020-3WE	
	"T" TYPE	WDT-2010WE	WD-2010-2WE	
		WDT-3010WE	WD-3010-2WE	
		WDT-4010WE	WD-4010-3WE	
		WDT-5020WE	WD-5050-3WE	
	INSIDE CORNER	WDI-2010WE	WD-2010-2WE	
		WDI-3010WE	WD-3010-2WE	
		WDI-4010WE	WD-4010-3WE	
		WDI-5020WE	WD-5020-3WE	
		WDI-11060WE	WD-11060WE	

Connectors	Type	Part No.	Used With	Packing
	OUTSIDE CORNER	WDO-2010WE	WD-2010-2WE	20 pcs
		WDO-3010WE	WD-3010-2WE	
		WDO-4010WE	WD-4010-3WE	
		WDO-5020WE	WD-5020-3WE	
		WDO-11060WE	WD-11060WE	
	"L" TYPE	WDL-2010WE	WD-2010-2WE	20 pcs
		WDL-3010WE	WD-3010-2WE	
		WDL-4010WE	WD-4010-3WE	
		WDL-5020WE	WD-5050-3WE	
		WDL-11060WE	WD-11060WE	
	END PIECE	WDE-2010WE	WD-2010-2WE	20 pcs
		WDE-3010WE	WD-3010-2WE	
		WDE-4010WE	WD-4010-3WE	
		WDE-5020WE	WD-5020-3WE	

# DECORATION DUCTING

Unit: mm

- Material: Rigid, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey. (Brown , Dark Brown , White , Milk , Light Grained , Dark Grained available. )
- Feature: All sizes feature same height in 11mm which are specially designed for flat cables.



Part No.		Color	W	H	Wires to be Contained 0.8 mm	L	Part No.		Color	W	H	Wires to be Contained 0.8 mm	L
without Adhesive tape	with Adhesive tape						without Adhesive tape	with Adhesive tape					
TE-1	TE-1T	Grey	12.7 (1/2")	11	1-4	2M	TE-41	TE-41T	Grey	31.8 (1 1/4")	11	6-12	
TE-2	TE-2T	Grey	19.0 (3/4")	11	2-6		TE-41BN	TE-41TBN	Brown				
TE-3	TE-3T	Grey	25.4 (1")	11	5-9		TE-41DB	TE-41TDB	Dark Brown				
TE-4	TE-4T	Grey	31.8 (1 1/4")	11	6-12		TE-41WE	TE-41TWE	White				
TE-5	TE-5T	Grey	38.1 (1 1/2")	11	10-18		TE-41MW	TE-41TMW	Milk				
TE-6	TE-6T	Grey	50.8 (2")	11	15-25		TE-41LX	TE-41TLX	Light Grained				
TE-11	TE-11T	Grey	12.7 (1/2")	11	1-4		TE-41DX	TE-41TDX	Dark Grained	38.1 (1 1/2")	11	10-18	1M
TE-11BN	TE-11TBN	Brown					TE-51	TE-51T	Grey				
TE-11DB	TE-11TDB	Dark Brown					TE-51BN	TE-51TBN	Brown				
TE-11WE	TE-11TWE	White					TE-51DB	TE-51TDB	Dark Brown				
TE-11MW	TE-11TMW	Milk					TE-51WE	TE-51TWE	White				
TE-11LX	TE-11TLX	Light Grained					TE-51MW	TE-51TMW	Milk				
TE-11DX	TE-11TDX	Dark Grained	TE-51LX	TE-51TLX	Light Grained	50.8 (2")	11	15-25					
TE-21	TE-21T	Grey	19.0 (3/4")	11	2-6					TE-51DX	TE-51TDX	Dark Grained	
TE-21BN	TE-21TBN	Brown								TE-61	TE-61T	Grey	
TE-21DB	TE-21TDB	Dark Brown								TE-61BN	TE-61TBN	Brown	
TE-21WE	TE-21TWE	White								TE-61DB	TE-61TDB	Dark Brown	
TE-21MW	TE-21TMW	Milk								TE-61WE	TE-61TWE	White	
TE-21LX	TE-21TLX	Light Grained				TE-61MW	TE-61TMW	Milk					
TE-21DX	TE-21TDX	Dark Grained	TE-61LX	TE-61TLX	Light Grained	25.4 (1")	11	5-9					
TE-21BK	TE-21TBK	Black	TE-61DX	TE-61TDX	Dark Grained								
TE-31	TE-31T	Grey	19.0 (3/4")	11	2-6					TE-61	TE-61T	Grey	
TE-31BN	TE-31TBN	Brown								TE-61BN	TE-61TBN	Brown	
TE-31DB	TE-31TDB	Dark Brown								TE-61DB	TE-61TDB	Dark Brown	
TE-31WE	TE-31TWE	White								TE-61WE	TE-61TWE	White	
TE-31MW	TE-31TMW	Milk				TE-61MW	TE-61TMW	Milk					
TE-31LX	TE-31TLX	Light Grained				TE-61LX	TE-61TLX	Light Grained					
TE-31DX	TE-31TDX	Dark Grained	TE-61BK	TE-61TBK	Black	25.4 (1")	11	5-9					
TE-31BK	TE-31TBK	Black	TE-61	TE-61T	Grey								
			TE-61BN	TE-61TBN	Brown								
			TE-61DB	TE-61TDB	Dark Brown								
			TE-61WE	TE-61TWE	White								
			TE-61MW	TE-61TMW	Milk								

■ Double-Sided Tape :

Adhesive Type	Usage Feature	Temperature	Suitable Adhere to
Acrylic Base Adhesive	To absorb the shock and good resistance to heat	80°C	Tile, Marble, Painted board, board, Stainless steel, Iron Plate, Baking Plate, PP, PE, EVA
Rubber Base Adhesive	with excellent adhesion and holding power	50°C	

- A Usage Instruction : Adhere/stick surface need to be without dust, wax, oil and water

## DECORATION WIRING DUCT CONNECTOR

Unit: mm

- Material: UL approved ABS, 94HB
- Color: Grey, Brown(BN), Dark Brown(DB), White(WE), Milk(MW).  
e.g. TFM-2MW



Connectors	Type	Part No.	Used With	Packing	Connectors	Type	Part No.	Used With	Packing	
	MID-WAY CONNECTOR	TEM-1	TE-1	20 pcs		OUTSIDE CORNER	TEO-1	TE-1	20 pcs	
		TEM-2	TE-2				TEO-2	TE-2		
		TEM-3	TE-3				TEO-3	TE-3		
		TEM-4	TE-4				TEO-4	TE-4		
		TEM-5	TE-5				TEO-5	TE-5		
		TEM-6	TE-6				TEO-6	TE-6		
	"T" TYPE	TET-1	TE-1		"L" TYPE		"L" TYPE	TEL-1		TE-1
		TET-2	TE-2					TEL-2		TE-2
		TET-3	TE-3					TEL-3		TE-3
		TET-4	TE-4					TEL-4		TE-4
		TET-5	TE-5					TEL-5		TE-5
		TET-6	TE-6					TEL-6		TE-6
	INSIDE CORNER	TEI-1	TE-1	END PIECE		END PIECE	TEE-1	TE-1		
		TEI-2	TE-2				TEE-2	TE-2		
		TEI-3	TE-3				TEE-3	TE-3		
		TEI-4	TE-4				TEE-4	TE-4		
		TEI-5	TE-5				TEE-5	TE-5		
		TEI-6	TE-6				TEE-6	TE-6		


## ONE PIECE WIRING DUCT

Unit: mm

Part No.		W	H	Length
Without Tape	With adhesive Tape			
TF-0905IY	TF-0905TIY	9.2	2.9	2M
TF-1313IY	TF-1313TIY	13.2	10.8	



- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Ivory.
- One piece design. Combines duct base together with its lip. Easy for application and save work time.

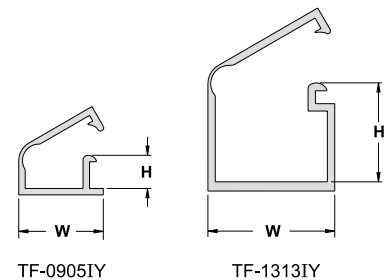


# ONE PIECE WIRING DUCT

Unit: mm

Part No.	W	H	Length
OS-2012TWE	20.3	11.9	6 feet (183cm with adhesive tape)
OS-4020TWE	38.8	19.3	
OS-6322TWE	62.8	22	



- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: White.
- One piece surface raceway is a single channel designed to route, protect and conceal video or power cabling, can be opened and closed repeatedly without cracking.
- Factory applied adhesive backing speeds installation.

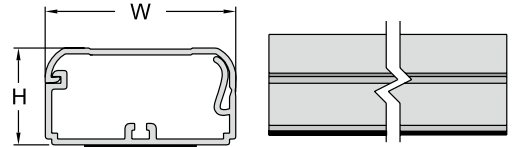


# ELECTRICAL BOX

Unit: mm

Part No.	Thread	Suitable Wiring Duct W x H	Packing
ELBF-1WE1	UNC #6-32	20X12、32X12、40X16、40X25	1 Set
ELBF-2WE1	W 1/8-40	60X16、TE-2、TE-4、TE-5	




- Material: UL approved ABS, 94HB
- Color: White
- Measurement lines on four sides of base and cover.

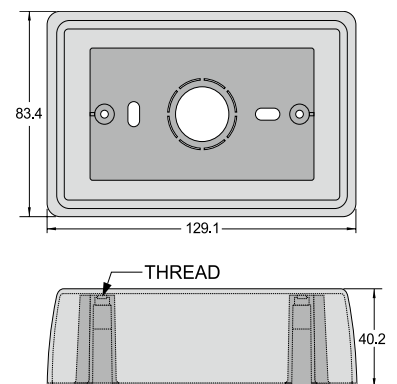



## ONE PIECE WIRING DUCT

Unit: mm

Part No.		W	H	Length
Without Tape	With adhesive Tape			
OP-2013WE	OP-2013TWE	19.5	13.8	1.83M
OP-3220WE	OP-3220TWE	31.8	19.6	
OP-4527WE	OP-4527TWE	45.1	27.0	

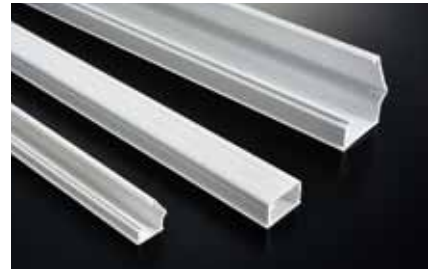

- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: White.
- One piece surface raceway is a single channel designed to route, protect and conceal video or power cabling, can be opened and closed repeatedly without cracking.
- Factory applied adhesive backing speeds installation.



## ONE PIECE WIRING DUCT CONNECTOR

Unit: mm

- Material: UL approved ABS, 94HB



Connectors	Type	Part No.	Used With	Packing	Connectors	Type	Part No.	Used With	Packing
	MID-WAY CONNECTOR	OPM-2013WE2	OP-2013WE	5 pcs		OUTSIDE CORNER	OPO-2013WE2	OP-2013WE	5 pcs
		OPM-3220WE2	OP-3220WE				OPO-3220WE2	OP-3220WE	
		OPM-4527WE2	OP-4527WE				OPO-4527WE2	OP-4527WE	
	"T" TYPE	OPT-2013WE2	OP-2013WE		"L" TYPE	OPL-2013WE2	OP-2013WE		
		OPT-3220WE2	OP-3220WE					OPL-3220WE2	
		OPT-4527WE2	OP-4527WE	OPL-4527WE2				OP-4527WE	
	INSIDE CORNER	OPI-2013WE2	OP-2013WE	END PIECE	OPE-2013WE2	OP-2013WE			
		OPI-3220WE2	OP-3220WE				OPE-3220WE2	OP-3220WE	
		OPI-4527WE2	OP-4527WE				OPE-4527WE2	OP-4527WE	
	DROP CHILING	OPC-2013WE2	OP-2013WE						
		OPC-3220WE2	OP-3220WE						
		OPC-4527WE2	OP-4527WE						

# TELEPHONE DUCTING




Unit: mm

- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey. (Brown , Dark Brown , White , Milk , Light Grained , Dark Grained available. )
- Length: 1M (2M available upon request)



WIRING DUCTS

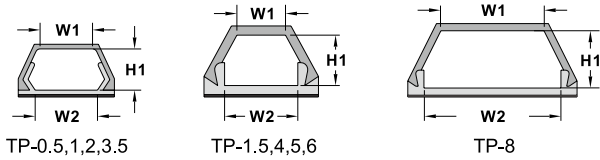

Part No.	Color	W1	W2	H1	Wires to be Contained 0.8 mm	L
TP-0.5	Grey	7	8	4.5	1 pcs	1M With Adhesive Tape
TP-0.5BN	Brown					
TP-0.5MW	Milk					
TP-1	Grey	6	7	4	1 pcs	
TP-1BN	Brown					
TP-1DB	Dark Brown					
TP-1WE	White					
TP-1MW	Milk					
TP-1LX	Light Grained					
TP-1DX	Dark Grained	6	8	7.4	1~2 pcs	
TP-1.5BN	Brown					
TP-1.5MW	Milk					
TP-1.5LX	Light Grained					
TP-1.5DX	Dark Grained					
TP-2	Grey	8	8	6	2~3 pcs	
TP-2BN	Brown					
TP-2DB	Dark Brown					
TP-2WE	White					
TP-2MW	Milk					
TP-2LX	Light Grained					
TP-2DX	Dark Grained	10	10	7	3~4 pcs	
TP-3	Grey					
TP-3BN	Brown					
TP-3DB	Dark Brown					
TP-3WE	White					
TP-3MW	Milk	9.5	14.5	9.5	4~5 pcs	
TP-3.5	Grey					
TP-3.5BN	Brown					
TP-3.5DB	Dark Brown					
TP-3.5WE	White					
TP-3.5MW	Milk	9.5	14.5	9.5	4~5 pcs	
TP-3.5LX	Light Grained					
TP-3.5DX	Dark Grained					

Part No.	Color	W1	W2	H1	Wires to be Contained 0.8 mm	L
TP-4	Grey	12	15	10	4~7 pcs	1M With Adhesive Tape
TP-4BN	Brown					
TP-4DB	Dark Brown					
TP-4WE	White					
TP-4MW	Milk					
TP-4LX	Light Grained					
TP-4DX	Dark Grained	10	17	13	7~9 pcs	
TP-4BK	Black					
TP-5	Grey					
TP-5BN	Brown					
TP-5DB	Dark Brown					
TP-5WE	White	11	19	16	10~15 pcs	
TP-5MW	Milk					
TP-5LX	Light Grained					
TP-5DX	Dark Grained					
TP-5BK	Black					
TP-6	Grey					30
TP-6BN	Brown					
TP-6DB	Dark Brown					
TP-6WE	White					
TP-6MW	Milk					
TP-6LX	Light Grained					
TP-6DX	Dark Grained	30	37	16	30~40 pcs	
TP-6BK	Black					
TP-8	Grey					
TP-8BN	Brown					
TP-8DB	Dark Brown					
TP-8WE	White					
TP-8MW	Milk	30	37	16	30~40 pcs	
TP-8LX	Light Grained					
TP-8DX	Dark Grained					

## TELEPHONE WIRING DUCT CONNECTOR

Unit: mm

- Material: UL approved ABS, 94HB
- Color: Grey, Brown(BN), Dark Brown(DB), White(WE), Milk(MW).e.g. TCM-2MW



Connectors	Type	Part No.	Used With	Packing	Connectors	Type	Part No.	Used With	Packing
	MID-WAY CONNECTOR	TPM-1	TP-1	20 pcs		OUTSIDE CORNER	TPO-1	TP-1	20 pcs
		TPM-2	TP-2				TPO-2	TP-2	
		TPM-3	TP-3				TPO-3	TP-3	
		TPM-4	TP-4				TPO-4	TP-4	
		TPM-5	TP-5				TPO-5	TP-5	
		TPM-6	TP-6				TPO-6	TP-6	
	"T" TYPE	TPT-1	TP-1		"L" TYPE	"L" TYPE	TPL-1	TP-1	
		TPT-2	TP-2				TPL-2	TP-2	
		TPT-3	TP-3				TPL-3	TP-3	
		TPT-4	TP-4				TPL-4	TP-4	
		TPT-5	TP-5				TPL-5	TP-5	
		TPT-6	TP-6				TPL-6	TP-6	
	INSIDE CORNER	TPI-1	TP-1	END PIECE	END PIECE	TPE-1	TP-1		
		TPI-2	TP-2			TPE-2	TP-2		
		TPI-3	TP-3			TPE-3	TP-3		
		TPI-4	TP-4			TPE-4	TP-4		
		TPI-5	TP-5			TPE-5	TP-5		
		TPI-6	TP-6			TPE-6	TP-6		

## TELEPHONE WIRING DUCT CONNECTOR

Unit: mm

- Material: UL approved ABS, 94HB
- Color: Grey, Brown(BN), Dark Brown(DB), White(WE), Milk(MW).e.g. TCM-0.5MW





Connectors	Type	Part No.	Used With	Packing
	MID-WAY CONNECTOR	TPM-0.5	TP-0.5	20 pcs
	"T" TYPE	TPT-0.5	TP-0.5	
	INSIDE CORNER	TPI-0.5	TP-0.5	
	OUTSIDE CORNER	TPO-0.5	TP-0.5	
	"L" TYPE	TPL-0.5	TP-0.5	

# SNAP FIT TELEPHONE DUCTING

Unit: mm

Part No.	Color	W1	W2	H	Overall Length	Connector
JD-1	Grey	10.4	8.6	8.0	1M With ADHESIVE TAPE BN: Brown (Light Brown) DB: Coffee WE: White MW: Milk LX: light grained DX: dark grained	JDT-1, JDM-1
JD-1BN	Brown					JDI-1, JDO-1
JD-1MW	Milk					JDL-1, JDE-1
JD-2	Grey	14.5	11.5	8.0		JDT-2, JDM-2
JD-2BN	Brown					JDI-2, JDO-2
JD-2MW	Milk					JDL-2, JDE-2
JD-3	Grey	18.8	16.4	10.8		JDT-3, JDM-3
JD-3BN	Brown					JDI-3, JDO-3
JD-3MW	Milk					JDL-3, JDE-3
JD-4	Grey	23.5	19.5	12.2		JDT-4, JDM-4
JD-4BN	Brown				JDI-4, JDO-4	
JD-4MW	Milk				JDL-4, JDE-4	

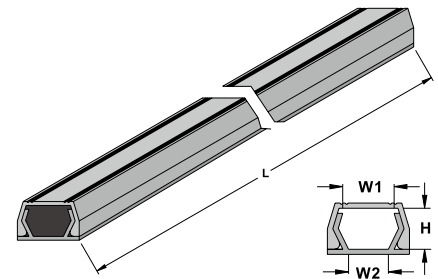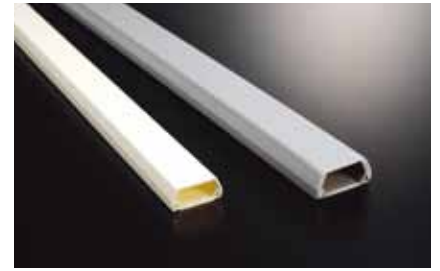

- Material: Rigid, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey. (Milk, White, Brown available on request)
- Backed with high quality self-adhesive tape to facilitate wire application.
- Length: 1M (2M available upon request)
- Application: Designed to protect wire on floor

## CONNECTORS TYPE:

MID-WAY CONNECTOR: JDM-1  
 OUTSIDE CORNER: JDO-1  
 'T' TYPE: JDT-1  
 'L' TYPE: JDL-1  
 INSIDE CORNER: JDI-1

# DOUBLE-COATED FOAM TAPE

Unit: mm

Part No.	Width	Packing
DT-8	8	100M
DT-12	12	
DT-14	14	
DT-18	18	
DT-23	23	



- Duct tape with high-performance adhesive to secure surface installation.
- Designed to meet all industry demands and applications.

# DOUBLE-COATED FOAM TAPE

Unit: mm

Part No.	Width	Packing
DF-8	8	50M
DF-13	13	
DF-18	18	
DF-23	23	
DF-28	28	30M




- Duct tape with high-performance adhesive to secure surface installation.
- Designed to meet all industry demands and applications.

## U TYPE WIRING DUCT

Unit: mm

Part No.	Length	Suitable Width
TD-1	2M with adhesive tape	6.5

- Material: Transparent PVC
- Application: Peel off the adhesive tape and stick to clean, oil-free surface. Snap wire into the duct with fingertip pressure.




## ROUND INSULATING TUBE

Unit: mm

Part No.	D	D1	L
OD-16SIY	14.0	16	2M
OD-20SIY	17.6	20	
OD-20IY	16.2	20	
OD-25SIY	22.4	25	
OD-25IY	21.0	25	
OD-32SIY	29.0	32	
OD-40SIY	36.4	40	



- Material : High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color : Ivory

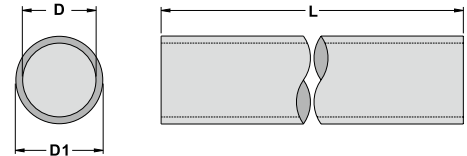


## OVAL INSULATING TUBE

Unit: mm

Part No.	W	H	L
OV-13IY	11.0	5.9	2M
OV-16IY	14.9	7.9	
OV-20IY	20.6	9.8	
OV-25IY	25.2	11.8	



- Material : High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color : Ivory

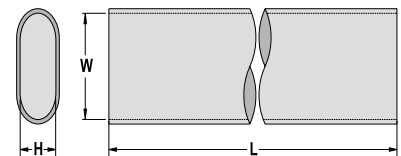


# WIRING DUCTS

Unit: mm

Part No.	A	B	C	D	L
EX-1	10.9	24.8	21.6	28.2	2M
EX-2	5.0	14.4	9.5	16.6	



- Material : High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color : Grey
- Snap the design lock into the stand aluminum frame.
- For containing wire inside professionally.

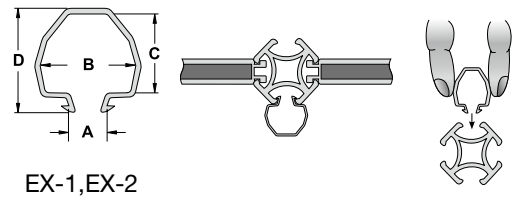


# CABLE CLIP

Unit: mm

Part No.	A	B	C	D	L
EX-8	15.1	6.0	16.8	23.0	100 pcs
EX-9	13.0	5.0	15.0	21.5	



- Material :PE
- Applied on alum pole of exhibition. EX-8 to fix cable and EX-9 to fix poster or used as hook.

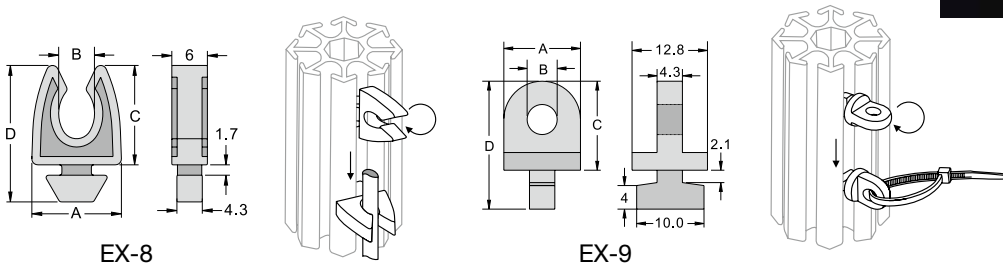

## ROUND FLOOR DUCTING

Unit: mm

- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey. (Brown, Milk, Light grained, Dark Grained available on request)
- Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trip.
- Special grooves design to avoid slip. Shining cover facilitate for decoration and suitable for department store, supermarket, shopping mall, station, hotel, hospital, office and any other public area.




Part No.	Color	W	H1	H	H1	Length	Connector Part No.	Connector Part No.
RD-20	Grey	20	8	6	4	1M With Adhesive Tape	RDT-20, RDM-20 RDI-20, RDO-20 RDL-20, RDE-20	RBL-20, RBT-20
RD-20BN	Brown							
RD-20MW	Milk							
RD-20LX	Light Grained							
RD-20DX	Dark Grained							
RD-30	Grey	30	11	8	6		RDT-30, RDM-30 RDI-30, RDO-30 RDL-30, RDE-30	RBL-30, RBT-30
RD-30BN	Brown							
RD-30MW	Milk							
RD-30LX	Light Grained							
RD-30DX	Dark Grained							
RD-40	Grey	40	16	9.5	7		RDT-40, RDM-40 RDI-40, RDO-40 RDL-40, RDE-40	RBL-40, RBT-40
RD-40BN	Brown							
RD-40MW	Milk							
RD-40LX	Light Grained							
RD-40DX	Dark Grained							
RD-50	Grey	50	20	11	8		RDT-50, RDM-50 RDI-50, RDO-50 RDL-50, RDE-50	RBL-50, RBT-50
RD-50BN	Brown							
RD-50MW	Milk							
RD-50LX	Light Grained							
RD-50DX	Dark Grained							
RD-60	Grey	60	30	13	9	RDT-60, RDM-60 RDI-60, RDO-60 RDL-60, RDE-60	RBL-60, RBT-60	
RD-60BN	Brown							
RD-60MW	Milk							
RD-60LX	Light Grained							
RD-60DX	Dark Grained							
RD-70	Grey	70	40	15	10	RDT-70, RDM-70 RDI-70, RDO-70 RDL-70, RDE-70	RBL-70, RBT-70	
RD-70BN	Brown							
RD-70MW	Milk							
RD-70LX	Light Grained							
RD-70DX	Dark Grained							
RD-90	Grey	90	45	19	15	RDT-90, RDM-90 RDI-90, RDO-90 RDL-90, RDE-90	RBL-90, RBT-90	
RD-90BN	Brown							
RD-90MW	Milk							
RD-90LX	Light Grained							
RD-90DX	Dark Grained							
RD-120	Grey	120	70	25	21	RDT-120, RDM-120 RDI-120, RDO-120 RDL-120, RDE-120	RBL-120, RBT-120	
RD-120BN	Brown							
RD-120MW	Milk							
RD-120LX	Light Grained							
RD-120DX	Dark Grained							

### CONNECTOR COVER TYPE:


- MID-WAY CONNECTOR:RDM-20
- "L" TYPE:RDL-20
- OUTSIDE CORNER:RDO-20
- INSIDE CORNER:RDI-20
- "T" TYPE:RDT-20
- END PIECE:RDE-20

### CONNECTOR BASE TYPE:

- "L" TYPE:RBL-60
- "T" TYPE:RBT-60



RD-20,30,40,50,60




RD-70,90,120

# ROUND FLOOR DUCTING

Unit: mm

- Material: High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Grey. (Brown, Milk available)
- Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trip.



Part No.	Color	W	W1	H	H1	Length
RDA-30	Grey					1M With Adhesive Tape
RDA-30BN	Brown	28.8	11.0	7.4	5.2	
RDA-30MW	Milk					
RDA-40	Grey					
RDA-40BN	Brown	38.5	18.8	11.5	8.5	
RDA-40MW	Milk					
RDA-50	Grey					
RDA-50BN	Brown	50.0	20.3	12.3	8.8	
RDA-50MW	Milk					
RDA-60	Grey					
RDA-60BN	Brown	60.0	33.3	13.8	10.7	
RDA-60MW	Milk					
RDA-70	Grey					
RDA-70BN	Brown	70.0	44.0	17.0	13.0	
RDA-70MW	Milk					
RDA-90	Grey					
RDA-90BN	Brown	87.5	57.5	21.0	16.5	
RDA-90MW	Milk					
RDA-120	Grey					
RDA-120BN	Brown	118.5	85.5	30.0	26.5	
RDA-120MW	Milk					


## ROUND TYPE WIRING DUCT WITH ALUMINUM COVER

Unit: mm

Part No.	W	W1	H	H1	Length
ARD-50	55	19.5	12.6	9.2	1M With Adhesive Tape
ARD-70	67.6	37	18.5	15.1	
ARD-90	88.2	45	17.2	14.3	
ARD-120	117	68	23.4	19.3	



- Material: Aluminum alloy Lid. High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0 Base.
- Construct : Set of cover and base, self-adhesive tape backed on base for easy installation.
- Function : Suitable for telecommunication, networking, security system, computer system, monitor and other wiring application.
- Feature : 1.High-impact aluminum cover to protect network communication from disconnection due to strong collide.  
2.Firm round cover design suitable for floor wiring application to facilitate trolley pass and avoid trip.  
3.Special streak design cover to avoid slip. Shining cover facilitate for decoration and suitable for department store, supermarket, shopping mall, station, hotel, hospital, office and any other public area.




## COVERING DUCT

Unit: mm

Part No.	W	W1	H	H1	Length
CD-3820YW1	67.2	38	22.3	19.8	1.2M





- Material : High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: Yellow.
- Function : Put wires inside the duct and fix the duct on the floor or wall.
- Feature : Can install wires before duct application. To protect wires from damage.

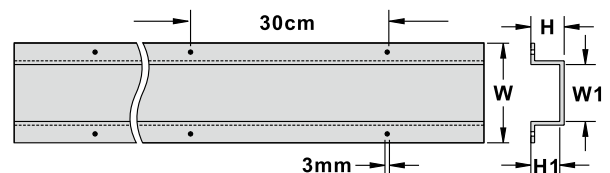

# SOFT WIRING DUCT

Unit: mm

- Material: PVC
- Color: Grey. (Brown, Milk, Black available)
- Soft pvc products, packed in roll for easy storage.
- Cut to required length for temporary wiring or permanent application. Supplied with double sided tape.




Part No.		Color	W	W1	H	H1
1M With Adhesive Tape	6 feet ( 183 cm ) with Adhesive tape					
SRD-251	SRD-25	Grey	25.4	7.4	5.8	3.8
SRD-251BN	SRD-25BN	Brown				
SRD-251MW	SRD-25MW	Milk				
SRD-251BK	SRD-25BK	Black				
SRD-501	SRD-50	Grey	50.8	14.8	11.6	7.8
SRD-501BN	SRD-50BN	Brown				
SRD-501MW	SRD-50MW	Milk				
SRD-501BK	SRD-50BK	Black				
SRD-651	SRD-65	Grey	66	19	15.3	10.9
SRD-651BN	SRD-65BN	Brown				
SRD-651MW	SRD-65MW	Milk				
SRD-651BK	SRD-65BK	Black				
SRD-751	SRD-75	Grey	76.2	22	17.4	11.6
SRD-751BN	SRD-75BN	Brown				
SRD-751MW	SRD-75MW	Milk				
SRD-751BK	SRD-75BK	Black				
SRD-1001	SRD-100	Grey	101.6	29.4	23.2	15.4
SRD-1001BN	SRD-100BN	Brown				
SRD-1001MW	SRD-100MW	Milk				
SRD-1001BK	SRD-100BK	Black				

## ONE PIECE WIRING DUCT

Unit: mm


Part No.	W	W1	H	H1	Length	Connector
RTF10WE	13.1	11.6	10.8	8.2	1.5M	RTFL-10WE "L" TYPE RTFI-10WE INSIDE RTFO-10WE "T" TYPE RTFM-10WE MID-WAY

- Material : High impact, warp-proof PVC, self-extinguishing, UL approved 94V-0.
- Color: White.
- Feature : One piece design to facilitate application and time saving.



**BANDEX** Cable Accessories

# CABLE MARKERS

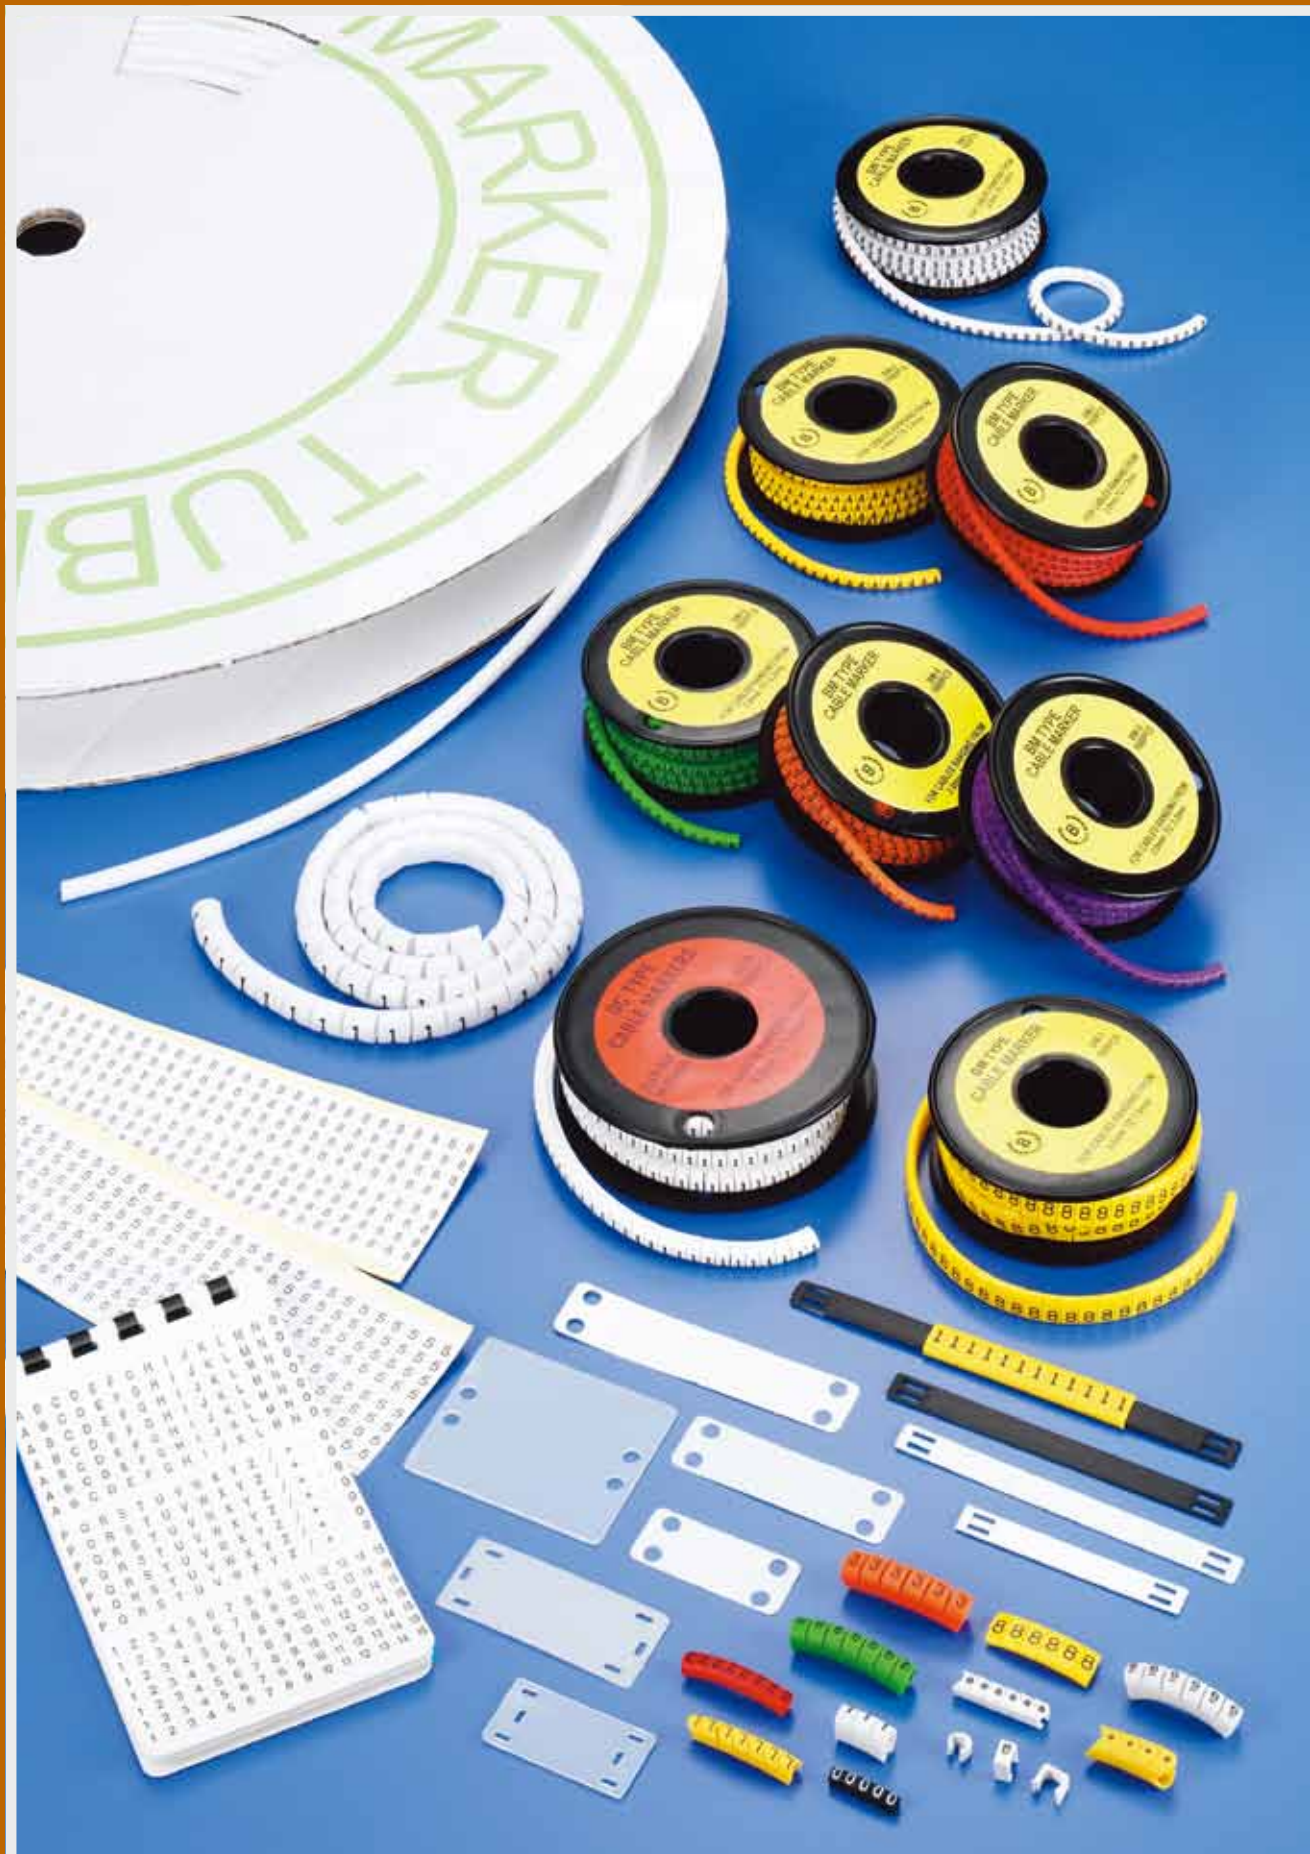

## INTERLOCK MARKERS

Unit: mm


Part No.	Suitable Wre		For Cable Size I.D.	L	STANDARD Marking	Packing	
	Straight Cut sq	AWG					
BM-0	0.12~0.75	26~18	2.0~3.2	4	Solid number or letter roll for 0,1,2,3, ...9 A,B, ...Z +, -, $\frac{1}{2}$ , /, blank	1000 pcs	
BM-1	0.75~3.5	18~12	3.0~4.2	4		1000 pcs	
BM-2	3.5~8	12~8	3.6~7.4	5		500 pcs	
BM-3	8~22	8~4	5.2~10.0	5.5		250 pcs	
<b>Interlock</b>							
EM-02	0.12~0.75	26~18	2.0~3.2	4		1000 pcs/RL	
EM-1	0.75~3.5	18~12	3.0~4.2	4		1000 pcs/RL	
EM-2	3.5~8	12~8	3.6~7.4	5		500 pcs/RL	
EM-3	8~22	8~4	5.2~10.0	5.5		250 pcs/RL	




- Material: Made of finest soft grade, strong, durable PVC that will resist oil, grease, and other material erosion.
- Description:
  1. BANDEX BM type cable marker features high quality flexible interior to fit various cable diameters.
  2. The markers stay attached on a roller and can be despatched easily when needed.
  3. Bold print on yellow body to show your codes distinguishly. Any numbers can be composed by arranging letters and numbers in sequence to provide the necessary codes.
  4. To be fitted before the terminal is attached or solder connection made and grip cable firmly in position.

**BM-TYPE CAN BE MADE IN 2 DIGIT MARKING OR EVEN 3 DIGITS.**

**CHEVRON CUT (EM)**



Marker tongue spans to fit various cable diameters and retracts to hold wires firmly in position.

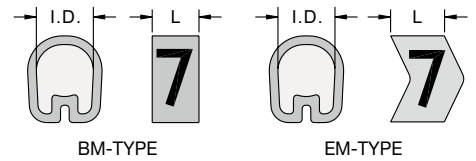


## INTERLOCK MARKERS

Unit: mm


Part No.	Suitable Wre		For Cable Size I.D.	L	STANDARD Marking	Packing
	Straight Cut sq	AWG				
ECP-02	0.2~1.25	24~18	1.3~3.0	3	Solid number or letter roll for 0,1,2,3, ...9 A,B, ...Z +, -, $\frac{1}{2}$ , /, blank	1000 pcs/RL
ECP-1	0.5~5.5	20~10	2.5~5.1	3		1000 pcs/RL
ECP-2	2.0~14.0	14~6	3.6~7.6	4		250 pcs/RL
ECP-3	8.0~60.0	8~1/0	6.2~16.0	6		100 pcs/RL



- Material : Made of finest soft grade, strong, durable P.V.C. that will resist oil, grease, and other material erosion.
- Description :
  1. BANDEX ECP type cable marker features high quality flexible interior to fit various cable diameters.
  2. The markers stay attached on a roller and can be despatched easily when needed.
  3. Bold print on yellow body to show your codes distinguishly. Any numbers can be composed by arranging letters and numbers in sequence to provide the necessary codes.
  4. Chevron cut design to keep marking in line consistently.



Marker tongue spans to fit various cable diameters and retracts to hold wires firmly in position.



# COLOUR CODED CABLE MARKERS

Unit: mm

Ordering information: Add colour code to the original Size & No.

For Example : **BM1- 0 BK**



<b>0</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>
<b>BK</b>	<b>BN</b>	<b>RD</b>	<b>OE</b>	<b>YW</b>	<b>GN</b>	<b>BE</b>	<b>VT</b>	<b>GY</b>	<b>WE</b>



Marker Size	Item No. Color Coded	Marker Size	Item No. Color Coded	Marker Size	Item No. Color Coded	Marker Size	Item No. Color Coded	Marker Size	Item No. Color Coded
BM0	BM0-0BK	BM1	BM1-0BK	BM2	BM2-0BK	BM3	BM3-0BK	GM-1	GM1-0BK
	BM0-1BN		BM1-1BN		BM2-1BN		BM3-1BN		GM1-1BN
	BM0-2RD		BM1-2RD		BM2-2RD		BM3-2RD		GM1-2RD
	BM0-3OE		BM1-3OE		BM2-3OE		BM3-3OE		GM1-3OE
	BM0-4YW		BM1-4YW		BM2-4YW		BM3-4YW		GM1-4YW
	BM0-5GN		BM1-5GN		BM2-5GN		BM3-5GN		GM1-5GN
	BM0-6BE		BM1-6BE		BM2-6BE		BM3-6BE		GM1-6BE
	BM0-7VT		BM1-7VT		BM2-7VT		BM3-7VT		GM1-7VT
	BM0-8GY		BM1-8GY		BM2-8GY		BM3-8GY		GM1-8GY
	BM0-9WE		BM1-9WE		BM2-9WE		BM3-9WE		GM1-9WE

## MARKER BOX

Unit: mm

Part No.	Available loaded quantity of BM Cable Marker	Material
BMB-1	13 pcs	Acrylic

- To keep and verify cable marker in rolls and improve wire application. Suitable for outside wire/application by carrying one box with various markers inside.



## GM TYPE MARKERS

Unit: mm

Part No.	Cable Dia		Marker Length	Std. Markings	Packing
	sq	mm			
GM-1	2~8	3.5~7.0	5	0,1,2,3, ...9 A,B,C, ...Z, +,-, $\frac{1}{2}$ , /, blank	500pcs

- Material : Made of finest soft grade, strong, durable PVC that will resist oil, grease and other material erosion.

- GM CABLE MARKER with its unique oval shape design provide

- 1.slip over cable directly (for small cable)
- 2.slip onto marker strip (for larger cable or cable bundles)



## MARKER STRIPS

Unit: mm

Part No.	L	W	T	Available loaded quantity of GM-1 Cable Marker	Packing
MS-65	65	9	6.7	9 pcs	100pcs
MS-100	100	9	6.95	16 pcs	
MS-135	135	9	7	23 pcs	
MS-135L	135	9	13	21 pcs	
MS-170	170	9	7	30 pcs	




- Material : UL approved Nylon 66 (black) , 94V-2.
- Nylon 66 PLATE with cable tie fastening hole to accommodate marker pieces for easy identification of cable runs.

## OM TYPE MARKER

Unit: mm

Part No.	Cable Dia		Wire Dia. I.D.	L	Std. Markings	Packing
	Sq	AWG				
OM-22S			1.3	10	Special specification is available upon request	100pc
OM-20S			1.5			
OM-18S			1.8			
OM-16S			1.9			
OM-0.75	0.75	18	3.0	10	OM-1.25 OM-2.0 0,1,2, ...100 A,B, ...Z +,-, $\frac{1}{2}$ , /, blank	100pc
OM-1.25	1.25	16	3.2			
OM-2.0	2.0	14	3.6			
OM-3.5	3.5	12	4.2			
OM-5.5	5.5	10	5.1			
OM-8	8.0	8	6.2			
OM-14	14	6	7.6			
OM-22	22	4	9.4			



- Material: Soft PVC (white) , to resist oil , grease and other material erosion.
- Sleeve on design.
- Apply before wire termination.
- ◆ Special marking is available upon request

\* Special Marking is available upon request.



# O TYPE MARKER TUBE


Unit: mm

Part No.	Packing	Part No.	Packing	Suitable Wire		Wire Dia. I.D.	
				sq	AWG		
OMR-0.75	100 M	Small Spool Pack	OMR-0.75-10M	10 M	0.75	18	3.0
OMR-1.25	100 M		OMR-1.25-10M	10 M	1.25	16	3.2
OMR-2.0	100 M		OMR-2.0-10M	10 M	2.0	14	3.6
OMR-3.5	100 M		OMR-3.5-10M	10 M	3.5	12	4.2
OMR-5.5	100 M		OMR-5.5-10M	10 M	5.5	10	5.1
OMR-8	50 M		OMR-8-10M	10 M	8.0	8	6.2




Part No.	Suitable Wire		Wire Dia. I.D.	Packing	Large Spool Pack
	sq	AWG			
OMR-0.75-500M	0.75	18	3.0	500M	
OMR-1.25-550M	1.25	16	3.2	550M	
OMR-2.0-500M	2.0	14	3.6	500M	
OMR-3.5-400M	3.5	12	4.2	400M	
OMR-5.5-200M	5.5	10	5.1	200M	

- Material : Soft durable PVC (white), resist oil, grease and other material erosion.
- Feature : Air filled with rifting design inside the tube maintain it's shape and not twist. Suitable for typing machine.



Part No.	Suitable Wire		Wire Dia. I.D.	Packing
	sq	AWG		
OMK-0.75	0.75	18	3.0	1000M/box
OMK-1.25	1.25	16	3.2	
OMK-2.0	2.0	14	3.6	

- Material : Soft durable PVC (white), resist oil, grease and other material erosion.
- Feature : Packed in box to keep tube clean for printing Good storage with 1000M per box.



## O TYPE MARKER TUBE


Unit: mm

Part No.	Suitable Wire		Wire Dia. I.D.	Packing	
	sq	AWG			
OMJ-1.5	0.75	18	2.8	200M Roll	Small Spool Pack
OMJ-2.5	2.0	14	4.0		
OMJ-4.0	3.5	12	4.5		

- Material : Soft PVC (bright white)
- Available in special color request of bright red, Bright Yellow.



Part No.	Suitable Wire		Wire Dia. I.D.	Packing	
	sq	AWG			
OMT-2.5	0.5	20	2.5	200M Roll	Small Spool Pack
OMT-3.0	0.75	18	3.0		
OMT-3.2	1.25	16	3.2		
OMT-3.5	2.0	14	3.5		
OMT-4.0	2.0	14	4.0		
OMT-4.5	3.5	12	4.5		
OMT-5.0	5.5	10	5.0	100M Roll	
OMT-5.5	5.5	10	5.5		
OMT-6.2	8.0	8	6.2		
OMT-6.7			6.7	50M Roll	
OMT-7.1			7.1		



Part No.	Suitable Wire		Wire Dia. I.D.	Packing	
	sq	AWG			
OMT-2.5-800M	0.5	20	2.5	Large Spool Pack	800M
OMT-3.0-600M	0.75	18	3.0		600M
OMT-3.2-650M	1.25	16	3.2		650M
OMT-3.5-550M	2.0	14	3.5		550M
OMT-4.0-450M	2.0	14	4.0		450M
OMT-4.5-400M	3.5	12	4.5		400M
OMT-5.0-350M	5.5	10	5.0		350M
OMT-5.5-250M	5.5	10	5.5		250M


- OMT Feature : Good for printing machine with smooth design inside the tube.

## FLAT MARKER TUBE

Unit: mm

Part No.	OUT Dia D1	Cable Dia D2	Packing
FMR-3	3.5	2	100M/roll
FMR-4	4.8	3	
FMR-6	6.8	4.2	
FMR-8	8.0	5	
FMR-13	13.0	8	
FMR-18	18.0	11	50M/roll

- Material : Soft PVC, resist oil, grease and other material erosion.
- Feature : Flat design and good for printing machine.



# MARKER PLATE

Unit: mm


Part No.	L	W	T	Packing
MP-1626	26	15.2	1.2	100pcs/bag
MP-2040	42.2	21.2	1.2	
MP-2560	60.8	25.2	1.2	
MP-5060	62.2	51.5	1.3	
MP-1938	38.5	19.1	0.4	
MP-1944	45.3	19.1	0.4	
MP-1950	50.5	19.1	0.4	
MP-1963	65	19.1	0.4	
MP-4463	63.8	44.8	0.4	
MP-1988	90.0	19.1	0.4	



- Material : UL approved Nylon 66
- Color : White
- Used to mark cable bundles for permanent identification.
- Secured with BANDEX cable ties extensively from CT-075 to CT-432 in variety of ways.

Part No.	L	W	T	Color	Packing
MP-16080	160.0	80.0	0.6	White, Red, Blue, Green, Yellow, Orange	100pcs/bag

- Material : UL approved Nylon 66
- Used to mark cable bundles for permanent identification.
- Secured with BANDEX cable ties extensively from CT-075-2C to CT-432-4C in variety of ways.

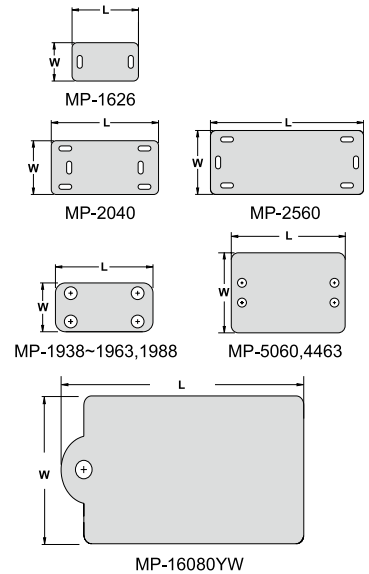


# MARKER BOX

Unit: mm

Part No.	W	L	H	W1	Marking pad	Packing
MC-1	32.6	11.5	3.0	5.0	30 x 9.5	100pcs
MC-2	43.5	19.1	4.6	5.1	40 x 17	

- Material : PE NATURE
- Using Method : Cut the paper in a suitable size and mark with numbers or letters you want.
- Put the paper into marker box and tie up with cable tie.
- For tie width : less 4.8 mm

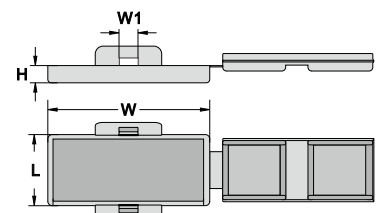


## SELF ADHESIVE WIRE MARKER

Unit: mm



CABLE MARKERS

Part No.	L	W	Std. Markings	Packing
WM-1	25	6	Solid:0,1,2,3,...100 A,B,C,...Z,+,-, $\frac{1}{2}$ Consecutive Number:0~9	4 pcs/Leaf , 80 Leaf/Sheet , 50 Sheet/Box
		7	Consecutive Number:1~34 35~67,68~100,A~Z	
WM-2	25	6.5	blank	80 Leaf/Sheet , 50 Sheet/Box
WM-3	40	10		30 Leaf/Sheet , 50 Sheet/Box
WMB-1	33	5.6	(0~9) @ 1 page	10 page
WMB-2	33	5.6	(A~Z,/,+,-,0~15) x 1 page	
WMB-3	33	5.6	(1~45) X 1 page	
WMB-4	33	5.6	(46~90) X 1 page	
※WMB-5	33	5.6	(1~45) X 4 page (46~90) X 4 page (A~Z,/,+,-,0~15) x 2 page	

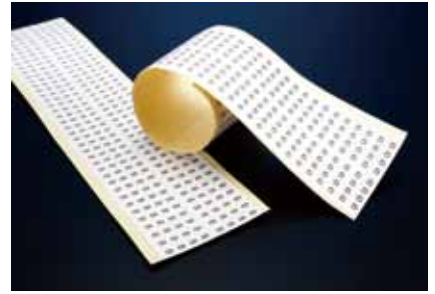

- Stick to wires for permanent identification.
  - Used extensively for cable diameters after or before terminal is attached.
  - Cloth type label.
  - For your orders, please specify solid or consecutive and what letter (s), number (s) you need.
- ※WMB-5 content please reference WMB-2、WMB-3、WMB-4

BOOK SIZE: L: 143 W: 82

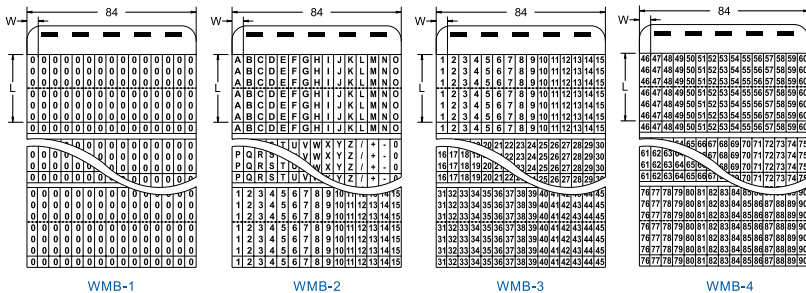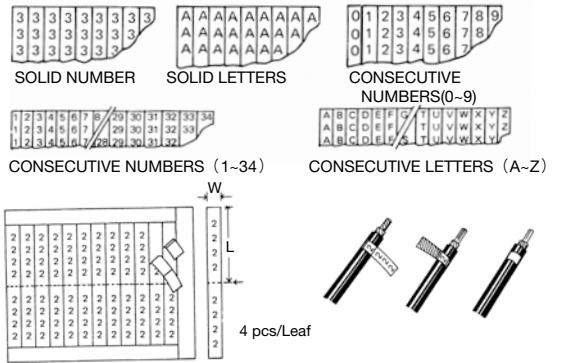


## OC TYPE CABLE MARKER

Unit: mm

Part No.	Wires suitable		mm	L	Std. Markings	Packing
	Sq	mm				
OC-1	0.5~0.75	20~18	2.5~3.0	4.0	Solid number or letter roll for 0,1,2,3,...9 A,B,C,...Z /,+,-, $\frac{1}{2}$ , blank	1000 pcs / Roll
OC-2	1.25~2.0	16~14	3.2~3.6			
※OC-2L	1.25~2.0	16~14	3.2~3.6			
OC-3	3.5~5.5	12~10	4.2~5.1			
OC-4	5.5~8.0	10~8	5.1~6.2			
OC-8	14	6	7.5~8.0	6.0		300pcs / Roll




- Material: Rigid PVC
  - Standard color: White body maker in black.
- Description:
1. To be fitted after termination. The marker can be removed without breaking the terminal connection.
  2. O shape design benefit to grip the wire/cable tight.
  3. Clip on design enable it to grip wire/cable firmly in position after termination attached.
  4. Each marker will accommodate multiple wire sizes.
- ※ OC-2L has wider entrance



## CM TYPE CALBE MARKER

Unit: mm

Part No.	Wires suitable		Wire Dia. I.D.	Length	Std. Markings	Packing
	Sq	mm				
CM-0.75	0.75	18	3.0	4.0	0,1,2,3, ...9 A,B,C, ...Z, +,-,≡,/, blank	100pcs/bag
CM-1.25	1.25	16	3.2			
CM-2.0	2.0	14	3.6			
CM-3.5	3.5	12	4.2			
CM-5.5	5.5	10	5.1			
CM-8	8.0	8	6.2			




- Material : Rigid P.V.C.
- Clip on design.
- Can be applied after wire termination.

## MB TYPE CABLE MARKER

Unit: mm

Part No.		Suitable Wire			Suitable Range I.D.	L	Std. Markings	Packing
Yellow	White	sq	AWG	Fiber Line				
MB-0	MB-0WE	0.75	18	2.0	2.2	4.0	Solid number or letter roll for 0,1,2,3,...9 A,B,C,...Z /,+,-,≡, blank	100pcs
MB-1	MB-1WE	1.25-2.0	16-14	3.0	3.0~3.4			
MB-2	MB-2WE	3.5-5.5	12-10		4.0~5.0			
MB-3	MB-3WE	8	8		5.2~6.0			




- Material : UL approved Nylon 6
- Color : Yellow, White
- Features :
  1. One size MB cable marker is suitable for different cable dia.
  2. Fast, snap-on installation.
  3. Flexible design, not easy to transfigure.
  4. High quality hot-foil stamped.
  5. Special inside stop point design makes MB marker keep in same direction, not overturn, marker read easily.

## U TYPE CABLE MARKER

Unit: mm

Part No.	Suitable wire sq		L	H	W	W1	Packing
	sq	AWG					
UM-1	1.25~2.0	16~14	12.6	4.3	4.4	3.0	100pcs




- Material: PP
- Color: Pink(PK1), Blue(BE1), Yellow(YW1), Green(GN1), Purple(VT1).
- Different colors for easy verification of wire funtion.

## JM TYPE CABLE MARKER

Unit: mm

Part No.	Packing	Part No.	Packing	Suitable Wire		mm	L	Std. Markings
				mm <sup>2</sup>	AWG			
JM-0	1000pcs (25pcsX40strips)	P-JM0	250pcs (25pcsX10strips)	0.12~0.5	26~20	1.2~2.0	2.3	0,1,2,3, ...9 A,B,C,... .Z /,+,-,=, blank
JM-1	1200pcs (30pcsX40strips)	P-JM1	300pcs (30pcsX10strips)	0.5~1.5	20~18	2.2~2.8	2.9	
JM-2	1200pcs (30pcsX40strips)	P-JM2	300pcs (30pcsX10strips)	1.5~2.5	16~14	3.0~3.6	2.8	
JM-3	800pcs (20pcsX40strips)	P-JM3	200pcs (20pcsX10strips)	4~6	12~10	4.2~5.1	2.9	

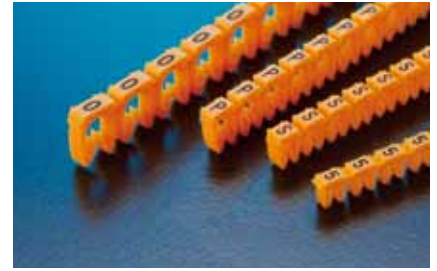


- Material : UL approved Nylon66, 94V-2
- Color : Yellow
- Yellow body with black printing

## JM TYPE COLOUR CODED CABLE MARKERS

Unit: mm

Part No.	Packing	Part No.	Packing	Suitable Wire		mm	L	Std. Markings
				mm <sup>2</sup>	AWG			
JM-0	1000pcs (25pcsX40strips)	P-JM0	250pcs (25pcsX10strips)	0.12~0.5	26~20	1.2~2.0	2.3	0,1,2,3, ...9
JM-1	1200pcs (30pcsX40strips)	P-JM1	300pcs (30pcsX10strips)	0.5~1.5	20~18	2.2~2.8	2.9	
JM-2	1200pcs (30pcsX40strips)	P-JM2	300pcs (30pcsX10strips)	1.5~2.5	16~14	3.0~3.6	2.8	
JM-3	800pcs (20pcsX40strips)	P-JM3	200pcs (20pcsX10strips)	4~6	12~10	4.2~5.1	2.9	



JM-0

JM-1,2,3

- Material: UL approved Nylon66, 94V-2
- Feature :
  1. More effective in marker assembly. It can be applied after completing of terminal assembly to the wire.
  2. not easy to transfigure and beautiful ,clear printing and longer lasting (not fade easily).
  3. Strip off from the cutting point easily when used. Continuously JM type cable markers is string type and each one is connected.

- Ordering Information: Add color code to the original Size & No.

- For Example : **JM1- 0 BK**


MARKER SIZE | | | COLOR OF MARKER  
NUMBER YOU NEED

0	1	2	3	4	5	6	7	8	9
BK	BN6	RD	OE	YW2	GN	BEC	VT	GY	WE

Marker Size	Part No. Color Coded	Marker Size	Part No. Color Coded	Marker Size	Part No. Color Coded	Marker Size	Part No. Color Coded
JM0	JM0-0BK	JM1	JM1-0BK	JM2	JM2-0BK	JM3	JM3-0BK
	JM0-1BN6		JM1-1BN6		JM2-1BN6		JM3-1BN6
	JM0-2RD		JM1-2RD		JM2-2RD		JM3-2RD
	JM0-3OE		JM1-3OE		JM2-3OE		JM3-3OE
	JM0-4YW2		JM1-4YW2		JM2-4YW2		JM3-4YW2
	JM0-5GN		JM1-5GN		JM2-5GN		JM3-5GN
	JM0-6BEC		JM1-6BEC		JM2-6BEC		JM3-6BEC
	JM0-7VT		JM1-7VT		JM2-7VT		JM3-7VT
	JM0-8GY		JM1-8GY		JM2-8GY		JM3-8GY
	JM0-9WE		JM1-9WE		JM2-9WE		JM3-9WE

**BANDEX** Cable Accessories

# CABLE TIES AND ACCESSORIES

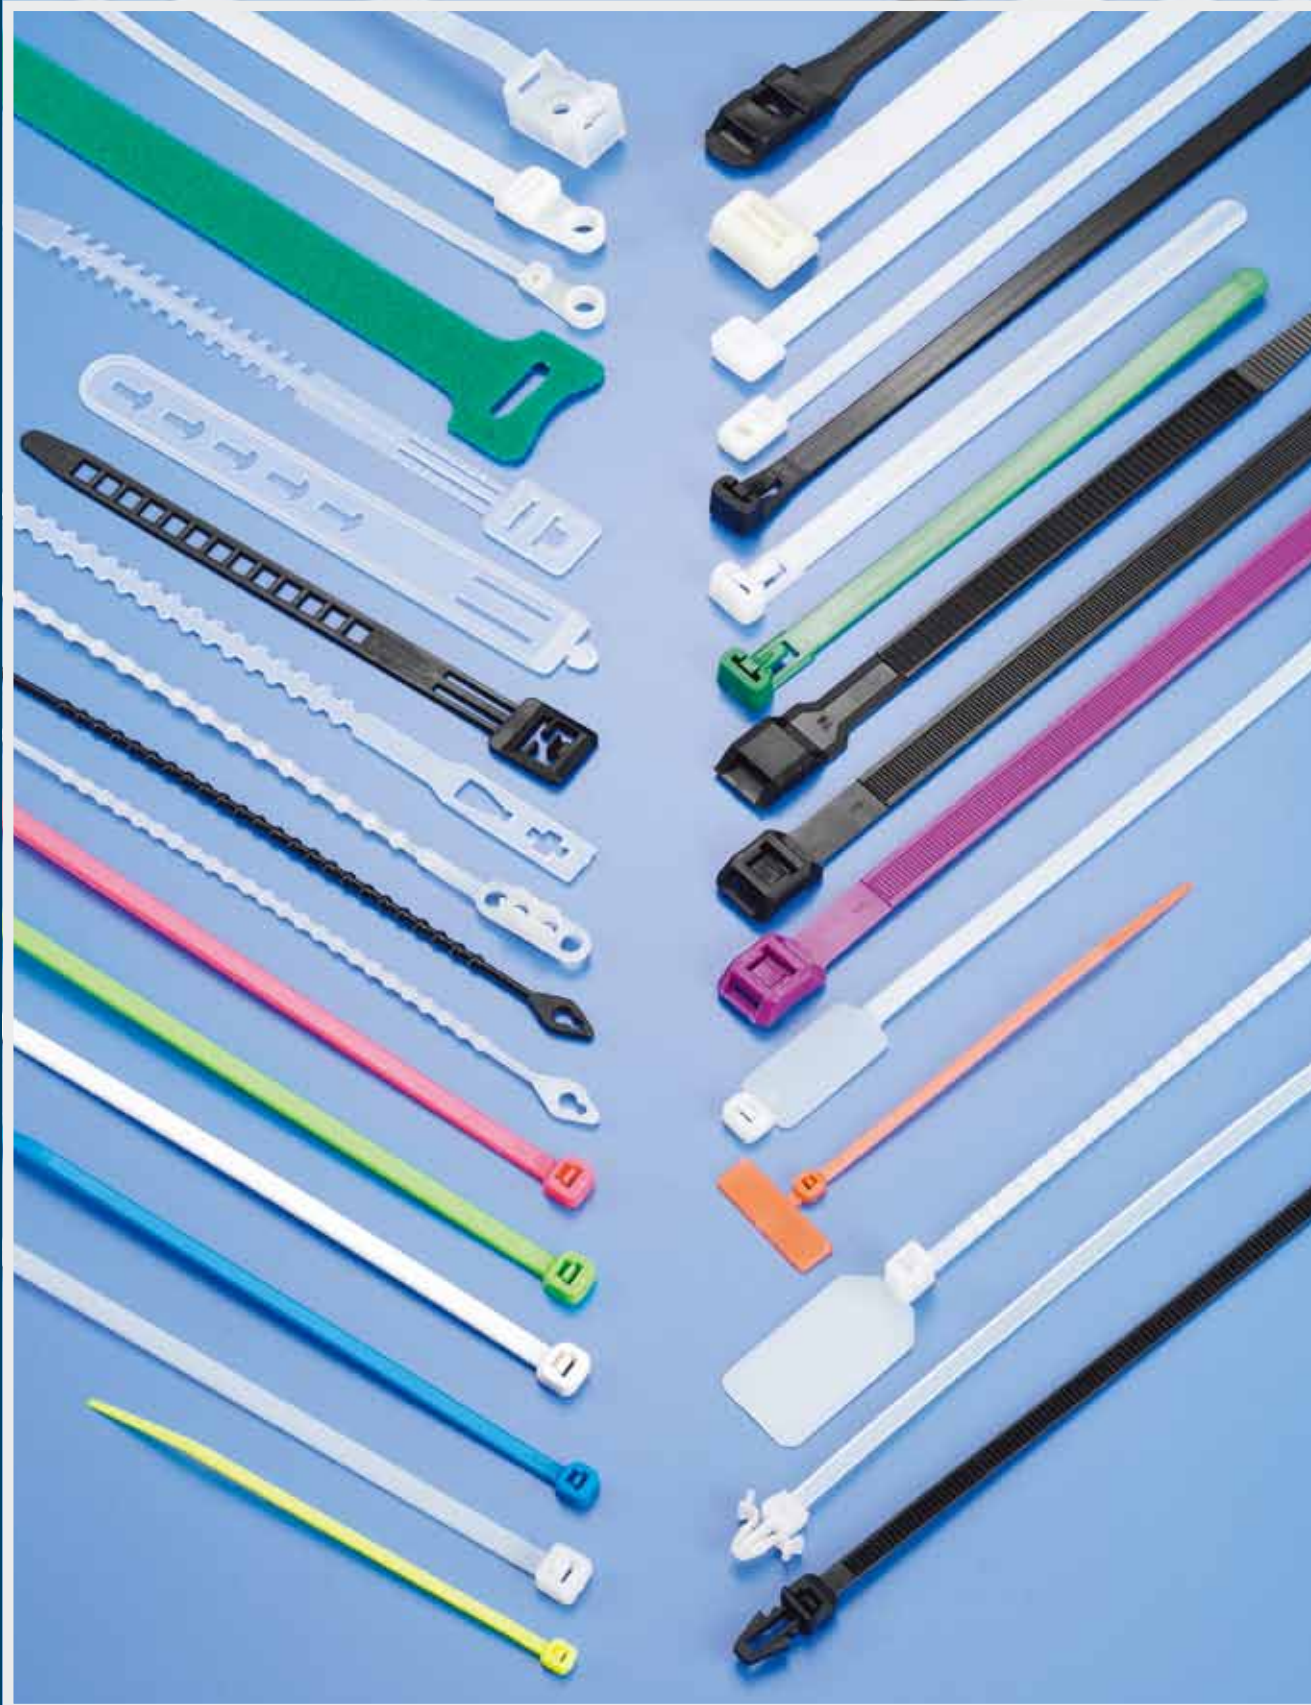

## MINIATURE CABLE TIES



Unit:mm

Tensile strength 3kg/7lbs No minimum bundle diameter.

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CTT-070-2C	CTT-070-2K	71	2 13/16"	1.6	11

Tensile strength 5kg/11lbs No minimum bundle diameter.


Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CTT-100-2C		103	4"	1.95	22

Tensile strength 8kg/18lbs

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CT-060-2C	CT-060-2K	63.7	2 1/2"	2.4	11
CT-075-2C	CT-075-2K	75	3"	2.4	15
CT-080-2C	CT-080-2K	80	3 1/8"	2.5	16
CT-094-2C	CT-094-2K	96	3 3/4"	2.5	21
CT-100-2C	CT-100-2K	100	4"	2.5	22
CT-120-2C	CT-120-2K	120	4 3/4"	2.5	28
CT-140-2C	CT-140-2K	142	5 1/2"	2.5	35
CT-150-2C	CT-150-2K	155	6 1/8"	2.5	39
CT-165-2C	CT-165-2K	165	6 1/2"	2.5	43
CT-200-2C	CT-200-2K	203	8"	2.5	55
CT-250-2C	CT-250-2K	250	10"	2.5	68
CT-300-2C		300	11 7/8"	2.5	80
CT-400-2C		400	15 3/4"	2.5	116



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.



## STANDARD CABLE TIES



Unit:mm


Tensile strength 18kg/40lbs

Part No.		L		W	Bundle dia.
100 pcs pk	1000 pcs pk	mm	inch		mm
CT-120-3C	CT-120-3K	120	4 3/4"	3.2	27
CT-140-3C	CT-140-3K	142	5 1/2"	3.2	34
CT-150-3C	CT-150-3K	150	6"	3.6	36
CT-180-3C	CT-180-3K	180	7"	3.6	46
※CTT-180-3C	CTT-180-3K	180	7"	3.6	46
CT-200-3C	CT-200-3K	203	8"	3.2	53
CT-200-3LC	CT-200-3LK	203	8"	3.6	52
CT-250-3C	CT-250-3K	250	10"	3.6	68
CT-265-3C	CT-265-3K	265	10 1/2"	3.6	73
CT-292-3C	CT-292-3K	292	11 1/2"	3.6	82
CT-330-3C		330	13"	3.6	93
CT-370-3C		368	14 1/2"	3.6	105

※ CTT-180-3C Tail



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.



# STANDARD CABLE TIES



Tensile strength 22kg/50lbs

Unit:mm

Part No.		L		W	Bundle dia. mm
100 pcs pk	1000 pcs pk	mm	inch		
CT-120-4C	CT-120-4K	120	4 3/4"	4.8	27
CT-160-4C	CT-160-4K	160	6 1/4"	4.8	39
CT-190-4C	CT-190-4K	190	7 1/2"	4.8	49
CTT-190-4C	CTT-190-4K	190	7 1/2"	4.8	49
CT-200-4C	CT-200-4K	203	8"	4.6	52
CT-200-4LC	CT-200-4LK	203	8"	4.8	52
CT-250-4C	CT-250-4K	250	10"	4.8	68
CT-280-4C	CT-280-4K	280	11"	4.8	77
CT-300-4C		300	11 7/8"	4.8	83
CT-310-4C		310	12"	4.8	86
CT-350-4C		350	13 3/4"	4.6	98
CT-370-4C		368	14 1/2"	4.8	105
CT-385-4C		385	15 3/16"	4.8	110
CT-400-4C		400	15 3/4"	4.6	116
CT-432-4C		432	17"	4.8	125
CT-450-4C		450	17 3/4"	4.8	131
CT-500-4C		500	19 11/16"	4.8	147
CT-550-4C		550	21 11/16"	4.8	162
CT-610-4C		610	24"	4.8	181
CT-635-4C		635	25"	4.8	189
CT-914-4C		914	36"	4.8	278




Tensile strength 34kg/75lbs

Part No.		L		W	Bundle dia. mm
100 pcs pk	1000 pcs pk	mm	inch		
CT-200Z-4C	CT-200Z-4K	200	8"	4.8	48
CT-280Z-4C	CT-280Z-4K	280	11"	4.8	70
CT-300Z-4C		300	11 7/8"	4.8	74
CTT-300Z-4C		300	11 7/8"	4.8	83
CT-370Z-4C		368	14 1/2"	4.8	94



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.



# HEAVY DUTY CABLE TIES




Tensile strength 45kg/100lbs

Unit:mm

Part No.		L		W	Bundle dia. mm
100 pcs pk	1000 pcs pk	mm	inch		
CT-380-6C		380	15"	6.4	108

Tensile strength 55kg/120lbs

Part No.		L		W	Bundle dia. mm
100 pcs pk	1000 pcs pk	mm	inch		
CT-120-7C	CT-120-7K	120	4 3/4"	7.6	22
CT-150-7C	CT-150-7K	150	6"	7.6	32
CT-200-7C	CT-200-7K	203	8"	7.6	52
CT-240-7C	CT-240-7K	240	9 7/16"	7.6	61
CT-280-7C	CT-280-7K	280	11"	7.6	74
CT-300-7C		300	11 7/8"	7.6	80
CT-340-7C		340	13 1/2"	7.6	92
CT-360-7C		360	14 3/16"	7.6	99
CT-370-7C		370	14 9/16"	7.6	101
CT-380-7C		380	15"	7.6	105
CT-610-7C		610	24"	7.6	177
CT-750-7C		750	29 1/2"	7.5	223



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.

## EXTRA HEAVY DUTY CABLE TIES


Tensile strength 55kg/120lbs

Unit:mm

Part No.	L		W	Bundle dia.
	mm	inch		
100 pcs pk				mm
CT-255-18C	254	10"	17.8	42
CT-380-8C	380	15"	8	105
CT-450-8C	450	17 3/4"	8	128
CT-500-8C	500	19 11/16"	8	143
CT-550-8C	550	21 11/16"	8	160



- Material: UL approved Nylon 66, 94V-2, With good tensile strength and insulation, not easy to get aging.
- Color: Standard color is natural, black, other special colors are available upon request.
- Feature: Use to bundle wires, cables, wrapping and get gardening neat and tidy.
- Application: Insert tie into the lock of head and pull out easily to bundle it.



Tensile strength 80kg/175lbs

Part No.	L		W	Bundle dia.
	mm	inch		
100 pcs pk				mm
CT-450-9C	450	17 3/4"	9	128
CT-550-9C	550	21 11/16"	9	160
CT-610-9C	610	24"	9	177
CT-685-9C	685	27"	9	202
CT-710-9C	710	28"	9	209
CT-762-9C	762	30"	9	227
CT-812-9C	812	32"	9	243
CT-914-9C	914	36"	9	275
CT-940-9C	940	37"	9	284
CT-1168-9C	1168	46"	9	356
CT-1219-9C	1219	48"	9	372
CT-1500-9C	1500	59"	9	462

## POLYPROPYLENE CABLE TIE

Tensile strength 8kg/18lbs

Unit: mm

Part No.	L		W	Bundle dia.
	mm	inch		
100 pcs pk				mm
CT-150PPBK-3C	150	6"	3.6	36



- Material: PP, good at chemical resistance from different density of base and acid.
- Color: Black (Natural is also available)
- Function: For fixing cable used at chemical industry. Increase the durability of cable tie application in chemical circumstance.

Tensile strength 10kg/22lbs

CT-200PPBK-4C	200	8"	4.6	52
CT-250PPBK-4C	250	10"	4.8	68

Tensile strength 23kg/51lbs

CT-240LPPBK-7C	240	9 7/16"	7.6	61
CT-300PPBK-7C	300	11 7/8"	7.6	80
CT-380PPBK-7C	380	15"	7.6	105
CT-550PPBK-8C	550	21 11/16"	8	160



# ULTRA HEAVY DUTY CABLE TIES



Tensile strength 114kg/250lbs

Unit:mm

Part No.	L		W	Bundle dia.
	mm	inch		mm
CT-230-13C	230	9"	12.7	57
CT-280-13C	280	11"	12.7	73
CT-380-13C	380	15"	12.7	105
CT-480-13C	480	18 7/8"	12.7	137
CT-550-13C	550	21 11/16"	12.7	159
CT-580-13C	580	22 7/8"	12.7	169
CT-730-13C	730	28 3/4"	12.7	216
CT-880-13C	880	34 11/16"	12.7	264
CT-1030-13C	1030	40 1/2"	12.7	312



## COLOUR CABLE TIES

We are able to meet any requirement for colouring cable ties.

Hayata proudly boast a comprehensive range of all the popular colours in the most commonly used sizes.

We can also produce colour cable ties to your exact requirements in any one of our many and various styles. Minimum quantities are required for special runs, so please be sure to contact our office before ordering.

UV resistant or black cable ties are readily available with no minimum order quantity.

※ Except for standard nylon and UV resistant ties, we also have heat-stabilized CHs and 94v-0 flame-retardant ties V0.

## TIE GUN

Unit: mm

Part No.	For Tie Width	Weight
TG-3	2.2~4.8	300 g
TG-5	2.2~4.8	333 g
TG-6	2.5~5.0	60 g
TG-7	2.5~5.0	275 g
TG-9	2.5~10.0	275 g
TG-10	4.8~13.0	320 g
TG-21	4.6~7.9	635 g

- Economical, pocket type
- Twist to cut surplus tie end after tightening cable. (TG-6)
- Tie gun for stainless steel tie. (TG-21)



## MOUNTING HEAD TIES




Unit: mm


Part No.	L	W	A	Max. Bundle Dia	Min. Loop Tensile Strength		packing
					Lbs	kgs	
MT-100-2C	110	2.5	3.2	25	18	8	100pcs
MT-155-3C	171.5	3.7	5.0	40	40	18	
MT-170-3C	171.5	3.7	4.0	40	40	18	
MT-205-4C	219	4.2	5.0	52	50	22	
MT-300-4C	300	4.8	4.8	85	50	22	
MT-300-7C	300	7.8	6.0	80	120	55	
MT-370-4C	370	4.8	4.8	102	50	22	
MT-400-7C	400	7.9	6.0	112	120	55	



- The cable tie can be secured to panel with a single bolt.

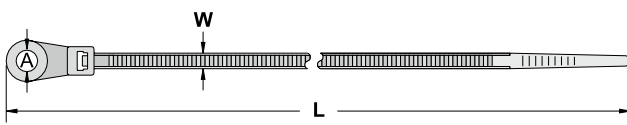

MT-100-2C, MT-155-3C, MT-170-3C, MT-205-4C, MT-300-4C, MT-370-4C

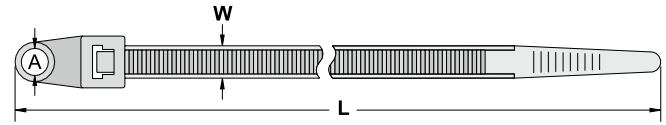


MT-300-7C, MT-400-7C


## DOUBLE HEAD CABLE TIE

Unit: mm

Part No.	L		W	D1		D2		Min. Loop Tensile Strength		packing
	mm	inch		MAX.	MIN.	MAX.	MIN.	lbs	kgs	
	DCV-225	225		8 7/8"	4.8	59	2.5	52	2.0	
DCV-300	300	11 7/8"	4.8	83	2.5	76	2.0	50	22	
DCV-370	370	14 9/16"	4.8	105	2.5	98	2.0	50	22	

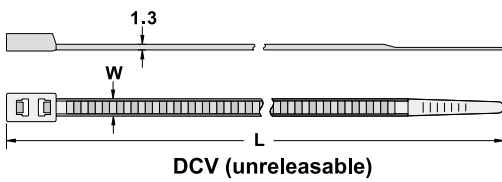


DCV (unreleasable)




- Material: UL approved Nylon 66, 94V-2
- Color: Natural

## RELEASABLE DOUBLE HEAD CABLE TIE

Part No.	L		W	D1		D2		Min. Loop Tensile Strength		packing
	mm	inch		MAX.	MIN.	MAX.	MIN.	lbs	kgs	
	RDCV-225	225		8 7/8"	4.8	59	2.5	52	2.0	
RDCV-300	300	11 7/8"	4.8	83	2.5	76	2.0	50	22	
RDCV-370	370	14 9/16"	4.8	105	2.5	98	2.0	50	22	

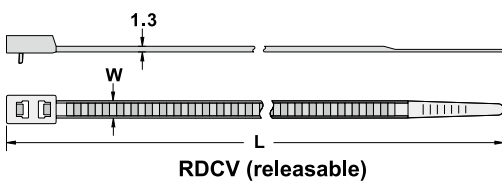



RDCV (releasable)



# HANDCUFF TIE

Unit: mm

Part No.	L		L1		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch	mm	inch			Lbs	kgs	
VP-10-35NBE	900	35 1/2"	450	17 3/4"	8.0	127	120	55	10PCS

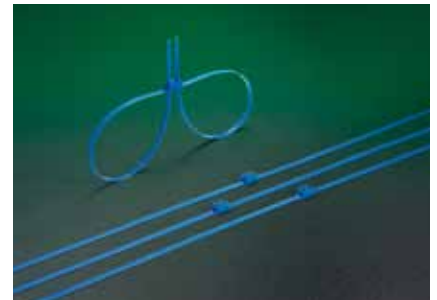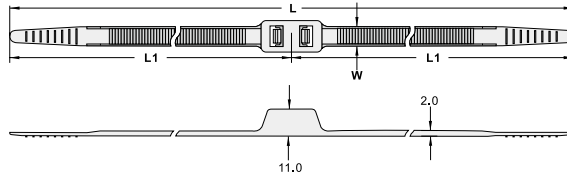


- Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation, not apt to age.
- Color: Blue
- Function: By means of double lock, bind wires or restrict action immediately.
- Feature:
  1. Bundling two things with single tie.
  2. Lock with extra height is hard to break.
  3. Smooth is inside so it won't hurt hands or wires.
  4. Environmental friendly, wear and impact resistant, easy to carry.
- ※ Special color, length available on request.

# BEAD TIE

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
TV-130K	143	5 3/8"	1.8	35	11	5	1000PCS




- Material: UL approved Nylon 66, 94V-2
- Color: Natural

# RELEASABLE MARKER TIE

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		Marking pad A X B	packing
	mm	inch			Lbs	kgs		
MHVC-100	114	4 1/2"	3.6	24	18	8	13 x19	100PCS
MHVC-200	215	8 1/2"	3.6	50	18	8	13 x19	

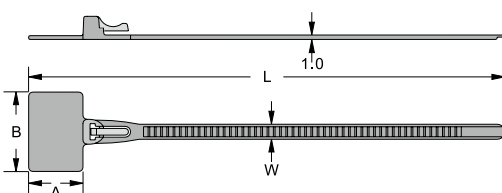

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Tie and identify bundles of cable in one operation. Flat areas may be imprinted or written on with a Marking Pen.
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

## MARKER TIES




Unit: mm

Part No.	L		W	Max. Bundle Dia.	Min. LoopTensile Strength		Marking pad mm A x B	packing
	mm	inch			Lbs	kgs		
MV-100-2C	100	4"	2.5	23	18	8	8 X 25	100pcs
MV-100L-2C	130	5 1/8"	2.5	22	18	8	28X 20	
MV-110-2C	110	4 3/8"	2.5	20	18	8	8 X 25	
MV-200-4C	200	8"	4.6	50	50	22	28 X 13	
MV-200-2C	200	8"	2.5	50	18	8	15 X 30	
MV-200S-2C	200	8"	2.5	50	18	8	8 X 25	
MV-270-4C	270	11"	4.6	75	50	22	28 X 13	
MV-300-4C	300	11 7/8"	4.8	82	50	22	54.5 X 13	
MV-370-4C	370	14 9/16"	4.8	105	50	22	54.5 X 13	



- Material: UL approved Nylon 66, 94V-2
- Tie and identify bundles of cable in one operation. Flat areas may be imprinted or written on with a Marking Pen.

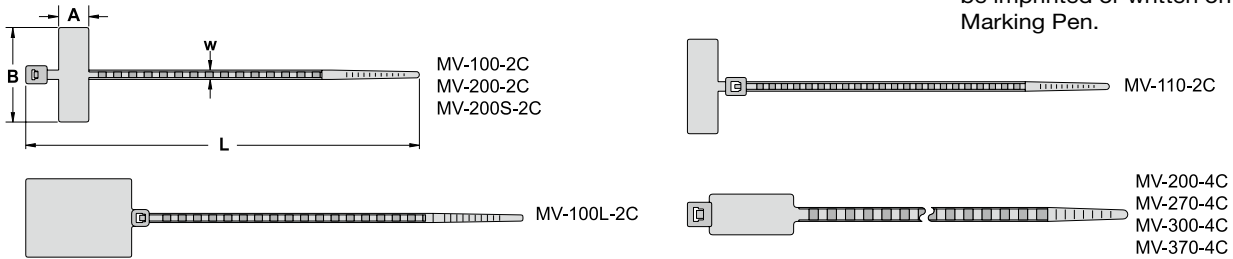

## SECURITY TIE


Unit: mm

Part No.	L		W	Max. Bundle Dia.	Marking pad mm A x B	packing
	mm	inch				
SCT-110	111	4 3/8"	2.6	20	8 X 27.6	100pcs
SCT-250	248.5	10"	3.5	50	36 X 19	
SCT-400	400	15 3/4"	4.8	102	36.5 X 19	



- Material: UL approved Nylon 66, 94V-2
- Feature: for the purpose of identification for security service logistics, transportation and courier.

The size of marker plate could be made or carved LOGO upon customer's request.

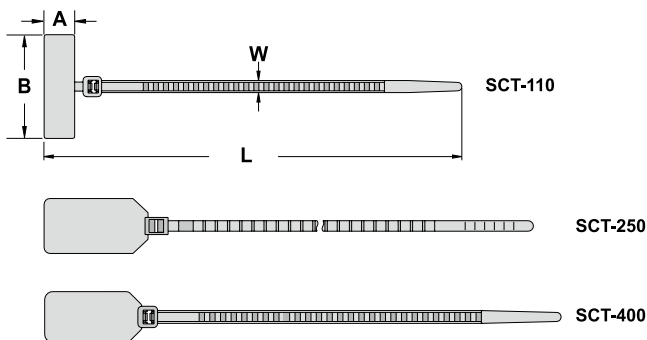


# MARKER TIE

Unit: mm

Part No.	L		W	Max. Bundle Dia.	Marking pad mm A x B	packing
	mm	inch				
PMT-150	160	6 1/4"	5	25	9.2 X 30	100pcs

- Material : PE
- Color: Natural
- Put the marking paper chip into marker box.

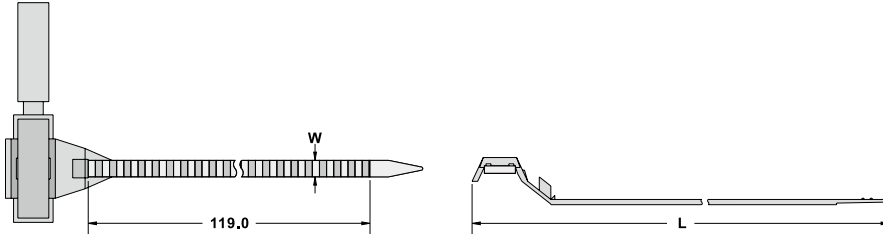


# RELEASABLE CABLE TIES



Unit: mm

Part No.	L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
RV-125B-7C	125	4 15/16"	7.6	30	50	22	100pcs
RV-150B-7C	150	6"	7.6	35	50	22	
RV-200B-7C	203	8"	7.6	50	50	22	
RV-250B-7C	250	10"	7.6	65	50	22	
RV-300B-7C	300	11 7/8"	7.6	80	50	22	
RV-500B-8C	500	19 7/8"	8.5	145	75	34	

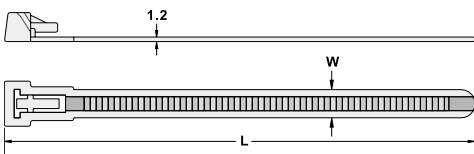


- Material: UL approved Nylon 66, 94V-2
- Color: Black , Natural
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

# RELEASABLE CABLE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
RV-125B-4C	125	4 15/16"	4.5	25	50	22	100pcs
RV-150B-4C	150	6"	4.5	35	50	22	
RV-200B-4C	200	8"	4.5	50	50	22	
RV-250B-4C	250	10"	4.5	65	50	22	
RV-300B-4C	300	11 7/8"	4.5	80	50	22	

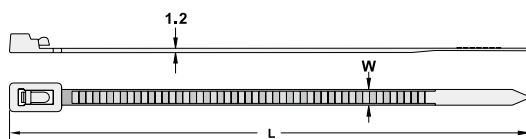

- Material: UL approved Nylon 66, 94V-2
- Color: Black , Natural
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.


## RELEASABLE CABLE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
RVC-125B-7C	125	4 15/16"	7.6	30	50	22	100pcs
RVC-150B-7C	150	6"	7.6	41	50	22	
RVC-200B-7C	203	8"	7.6	58	50	22	
RVC-250B-7C	250	10"	7.6	73	50	22	
RVC-300B-7C	300	11 7/8"	7.6	89	50	22	
RVC-370B-7C	370	14 5/8"	7.6	108	50	22	



- Material: UL approved Nylon 66, 94V-2
- Color: Black , Natural
- Easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

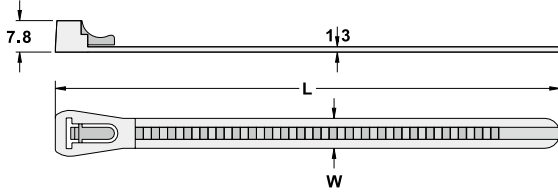


## RELEASABLE CABLE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
RT-100-2C	102	4"	3.6	25	40	18	100pcs
RT-150-4C	150	6"	4.6	39	50	22	
RT-200-4C	200	8"	4.6	55	50	22	
RT-250-4C	250	10"	4.8	74	50	22	
RT-300-4C	300	11 7/8"	4.8	88	50	22	
RT-370-4C	370	14 9/16"	4.8	102	50	22	
RT-914-9C	914	36"	9	275	175	80	
RT-230-12C	232.5	8 15/16"	12.8	60	250	114	
RT-290-12C	292.5	11 1/2"	12.8	79	250	114	
RT-405-12C	407.5	16"	12.8	116	250	114	
RT-480-12C	482.5	18 7/8"	12.8	140	250	114	
RT-580-12C	576.6	22 7/8"	12.8	172	250	114	



- Material: UL approved Nylon 66, 94V-2
- Finger catch design to release cable tie locking. Good for temporary fastening purpose.

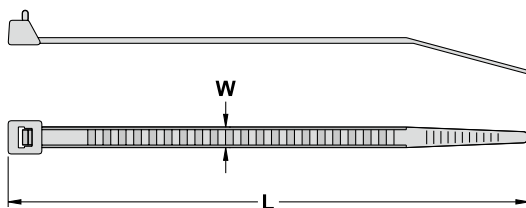


# RELEASABLE LASHING CABLE TIE

Unit: mm

Part No.	L		W mm	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
HRCV-240XL	240	9 7/16"	12.8	60	250	114	100pcs
HRCV-300XL	300	11 7/8"	12.8	79	250	114	
HRCV-415XL	415	16 5/16"	12.8	116	250	114	
HRCV-490XL	490	19 5/16"	12.8	140	250	114	
HRCV-590XL	590	23 1/4"	12.8	171	250	114	



- Material: UL approved Nylon 66, 94V-2
- Finger catch design to release cable tie locking. Good for temporary fastening purpose.

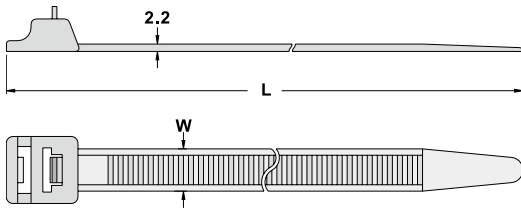


# PUSH MOUNT TIE

Unit: mm

Part No.	L		W mm	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
PHV-150	152.5	6	7.9	37	30	13	100pcs



- Material: UL approved Nylon 66, 94V-2
- Releasable.




# SADDLE MOUNTING TIE

Unit: mm

Part No.	L		W mm	packing
	mm	inch		
PMB-145	144.6	5 11/16"	7.1	100pcs
PMB-240	238.2	9 3/8"	7.1	




- Material: UL approved Nylon 66, 94V-2
- Color: Natural, Grey
- Standard color is natural, other special colors are available upon request. Standard color is natural, other special colors are available upon request.
- With using model no. CWP-38 (Wall Plug) together, and fix things on the wall easily.

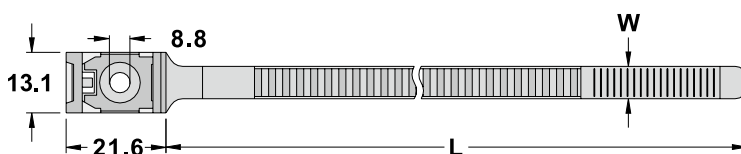


## DOUBLE LOCKING CABLE TIES

Unit: mm



DL-132,DL-180



Standard design



### NYLON66

Part No.		L		W	Max.Bundle Dia.	Min. oopTensile Strength		packing
Natural	Black	mm	inch			lbs	kg	
DL-132	DL-132BK	132	5 1/8"	9.0	25	79	36	100pcs
DL-180	DL-180BK	180	7"	9.0	40	79	36	
DL-235	DL-235BK	235	9 1/4"	9.0	53	120	55	
DL-265	DL-265BK	265	10 1/2"	9.0	78	120	55	
DL-300	DL-300BK	300	11 7/8"	9.0	88	120	55	
DL-360	DL-360BK	360	14 1/4"	9.0	100	120	55	
DL-510	DL-510BK	510	20"	9.0	150	120	55	
DL-610	DL-610BK	610	24"	9.0	180	120	55	
DL-760	DL-760BK	760	30"	9.0	230	120	55	

- Material : UL approved Nylon 66 , 94V-2
- Color: Natural , Black

### NYLON12

Part No.	L		W	Max.Bundle Dia.	Min. oopTensile Strength		packing
Black	mm	inch			lbs	kg	
DL-132N12BK	132	5 1/8"	9.0	25	55	25	100pcs
DL-180N12BK	180	7"	9.0	40	55	25	
DL-235N12BK	235	9 1/4"	9.0	53	112	51	
DL-265N12BK	265	10 1/2"	9.0	78	112	51	
DL-300N12BK	300	11 7/8"	9.0	88	112	51	
DL-360N12BK	360	14 1/4"	9.0	100	112	51	
DL-510N12BK	510	20"	9.0	150	112	51	
DL-610N12BK	610	24"	9.0	180	112	51	
DL-760N12BK	760	30"	9.0	230	112	51	

- Material : UL approved Nylon12 , 94HB.
- Color: Natural , Black


# DOUBLE LOCKING CABLE TIE

Unit: mm


Part No.		L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
Black	Natural	mm	inch			Lbs	kgs	
DK-132SBK		132	5 1/8"	6	25	50	22	100pcs
DK-180SBK		180	7"	6	40	50	22	
DK-180BK		180	7"	9	40	80	36	
DK-200BK	DK-200	201	8"	9	47	80	36	
DK-265BK		265	10 1/2"	9	64	120	55	
DK-290BK	DK-290	292	11 1/2"	9	72	120	55	
DK-360BK		360	14 1/4"	9	95	120	55	
DK-380BK	DK-380	382	15"	9	100	120	55	
DK-510BK		510	20"	9	142	120	55	
DK-610BK	DK-610	610	24"	9	174	120	55	
DK-760BK		760	30"	9	214	120	55	



● Material: UL approved Nylon 66, 94V-2



DK-132S,DK-180,DK-180S,DK-200



DK-265,DK-290,DK-360,DK-380,DK-510,DK-610,DK-760


# IN-LINE CABLE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia.	packing
	mm	inch			
FCT-255	255	10"	9.0	74	100pcs
FCT-391	391	15 1/2"	9.0	117	





- Material: UL approved Nylon 66, 94V-2.
- Color : Natural and Black, other colors are available upon request.
- Feature: Flat headed low profile design to be used with playground equipment to avoid harming playing children.

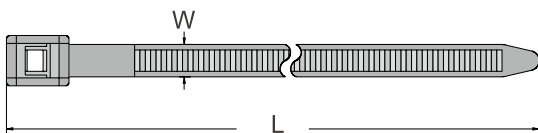

## IN-LINE CABLE TIES

Unit: mm

Part No.	L		W	Max.Bundle Dia.	packing
	mm	inch			
RRCV-100	103	4"	2.5	23	100pcs
RRCV-200D	203	8"	4.8	52	



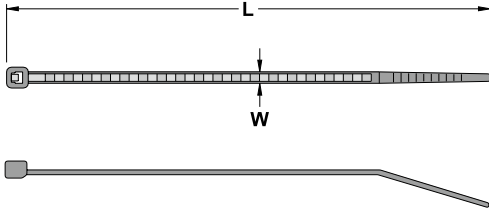


- Material: UL approved Nylon 66, 94V-2.
- Feature : Reverse-insert design with pawl outside to eliminate the damage of object.

## BAED TYPE TIES

Unit: mm

Part No.	L		W	Max. Bundle Dia	packing
	mm	inch			
BT-100	103	4"	2.5	25	100pcs
BT-120	120	4 3/4"	2.4	30	
BT-150	150	6"	2.9	39	
BT-180	180	7"	2.9	49	
BT-230	226	8 15/16"	3.8	63	
BT-280	273	11"	3.0	75	

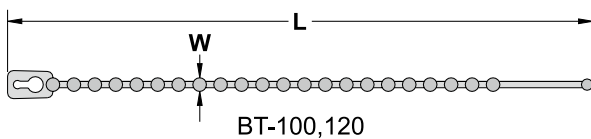

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.


# DOUBLE HEAD KNOT TIE

Unit: mm


Part No.				L		W	Max. Bundle Dia	packing
NYLON 66		PE		mm	inch			
Natural	Black	Natural	Black					
KTV-145	KTV-145BK	KTV-145E	KTV-145EBK	145	5 3/4"	2	35	100pcs
KTV-150	KTV-150BK	KTV-150E	KTV-150EBK	150	6"	3.6	38	
KTV-170	KTV-170BK	KTV-170E	KTV-170EBK	167	6 9/16"	3.9	41	
KTV-180	KTV-180BK	KTV-180E	KTV-180EBK	180	7"	3.6	46	
KTV-230	KTV-230BK	KTV-230E	KTV-230EBK	230	8 15/16"	3.6	62	




- Material : Nylon 66 、 PE
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.



KTV-145



KTV-150, KTV-180, KTV-230




KTV-170

# KNOT TIE

Unit: mm

Part No.		L		W	Max. Bundle Dia	packing
Red	Natural	mm	inch			
STV-130RD7	STV-130	130	5 1/8"	3	35	100pcs



- Material: UL approved Nylon 66, 94V-2
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.


## WIRE COLLECT TIE

Unit: mm


Part No.	L		W	Max.Bundle Dia.	packing
	mm	inch			
PV-130-15C	130	5 1/8"	15	35	100pcs
PV-140-9C	142	5 1/2"	9	38	
PV-160-9C	160	6 1/4"	8.5	45	
PV-230-5C	234	9 1/16"	5.5	50	
PV-350BK-7C	350	13 3/4"	7.0	100	



- Material: Polyethylene PE.
- Color: Natural. For Black, Please add "BK" to item No.
- Application: Wrap electrical cords for shipping and packaging.
- Using Method: First, Put the wire into A (see the diagram) then roll up the wire and end it by collect tie.




PV-130-15C



PV-160-9C



PV-140-9C




PV-230-5C  
PV-350-7C

## WIRE COLLECT TIE

Unit: mm

Part No.		L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
Natural	Black	mm	inch			Lbs	kgs	
WCT-165	WCT-165BK	165	6 1/2"	7	44	50	22	100pcs

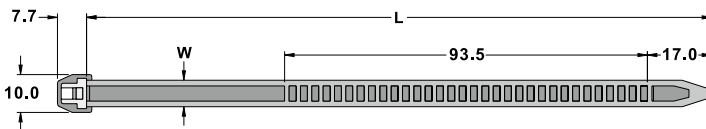

- Material: UL approved Nylon 66, 94V-2

# PUSH MOUNT TIE





Unit: mm

Part No.	L		W	Max. Bundle Dia. (mm)	Mounting hole	Chassis	Min. Loop Tensile Strength		packing
	mm	inch					Lbs	kgs	
	PCVS-130	132							
PCV-155	168	6 1/8"	3.8	40	4.8	3	40	18	
PCVS-200	203	8"	4.8	50	4.8	3	50	22	
PCV-200	203	8"	4.8	50	6.4	3	50	22	
PEV-170BK	170	6 11/16"	5.3	40	6.8	12	26	12	
PFVS-130	131	5 1/8"	3.7	30	4.8	2.4	40	18	
PFVS-155	157.5	6 1/8"	3.7	38	4.8	2.4	40	18	
PFVS-200	207	8"	3.7	50	4.8	2.4	40	18	
PGV-100	101	4 1/8"	3.4	25	4.8	2.5	40	18	
PGV-130	135	5 5/16"	3.4	33	4.8	2.5	40	18	
PSV-130	132	5 1/8"	4.8	30	6.4	3.3	50	22	
PSV-200	202	8"	4.8	50	6.4	3.3	50	22	
PUV-170	168.6	6 5/8"	5.4	38	6.8	1.6	50	22	
PWVS-100	112	4 3/8"	2.5	25	4.6	2.6	18	8	
PWVS-130	133	5 1/8"	4.8	30	4.6	4.5	50	22	
PWVS-155	157	6 1/8"	3.5	36	4.6	2.6	40	18	
PWV-130	132	5 1/8"	4.8	30	6.2	2.8	50	22	
PWV-170	170	6 11/16"	4.6	40	6	3	50	22	
PWV-200	201	8"	4.8	50	6.2	2.8	50	22	
PRVS-130HSBK	134.5	5 1/4"	4.8	30	8.2	5	50	22	



- Material: UL approved Nylon 66, 94V-2
- Press the tie into a pre-drilled hole and bind the cord by securing the tie.
- ※ PRVS-130HSBK : UL approved heat stabilized Nylon 66, 94V-2 black

100pcs

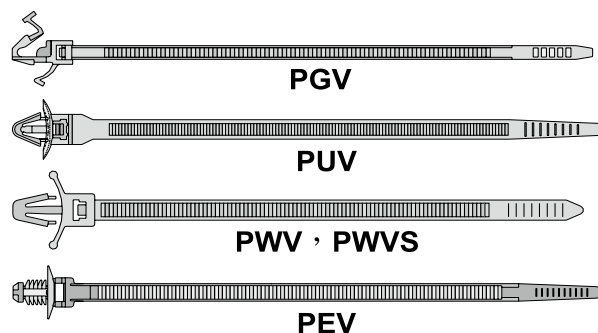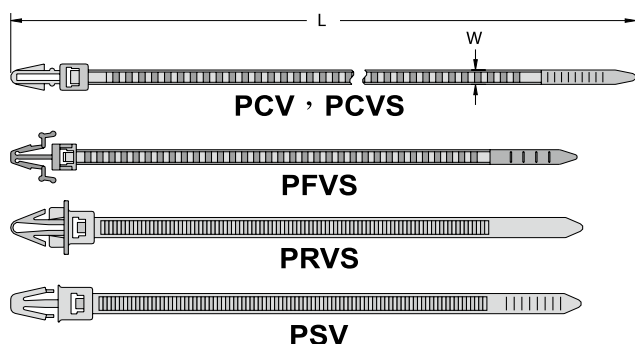

# RELEASABLE PUSH MOUNT TIE

Unit: mm

Part No.	L		W	Max. Bundle Dia	Mounting hole diameter	Chassis thickness	Min Loop Tensile Strength		packing
	mm	inch					Lbs	kgs	
	PDV-170BK	169							




- Material: UL approved Nylon 66, 94V-2

## CABLE TRAY FIXING TIE

Part No.		L		L1	L2	W	Min. Loop Tensile Strength		packing
Black	Natural	mm	inch				lbs	kgs	
CTF-320BK	CTF-320	320	12 5/8"	40	278	7.6	120	55	100pcs

Unit: mm

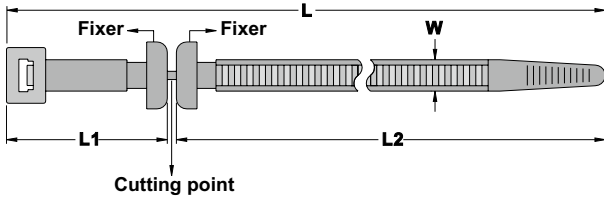


- Material: UL approved Nylon 66, 94V-2
- This simple, neat tie provides a permanent solution to the problem of fixing cables to cable trays. The one-piece all plastic moulding in tough, flexible Nylon 66, snaps apart to slot into cable trays.

## CHASSIS TIE

Part No.	L		W	Max. Bundle Dia.	packing
	mm	inch			
KFC-300BK	304	11 7/8"	6.2	85	100pcs
KFC-380BK	380	15"	7.6	100	
KFS-380BK	380	15"	7.6	100	

Unit: mm

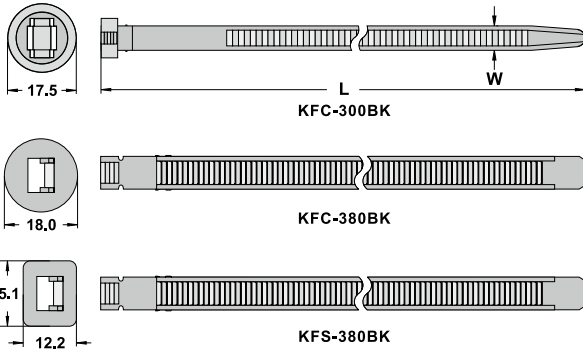


- Material: UL approved Nylon 66, 94V-2

## MOUNTING ADJUSTABLE TIE

Part No.	L		W	packing
	mm	inch		
MAT-120BK	120	4 3/4"	10	100pcs

Unit: mm

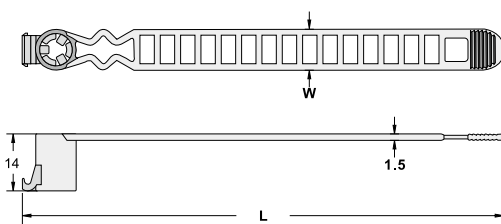


- Material: UL approved Nylon 66, 94V-2

# MAGIC CABLE TIE

Unit: mm

Part No.	L		W	Max.Bundle Dia.	Color	packing
	mm	inch				
MGT-125	125	5"	12	30	BK WE RD YW BE GN	20pcs
MGT-135	135	5 5/16"	12	33		
MGT-150	150	6"	12	36		
MGT-150M	150	6"	10	36		
MGT-180	180	7"	12	40		
MGT-210	210	8 1/4"	16	50		
MGT-240	240	9 7/16"	16	65		
MGT-310	310	12"	16	85		




Part No.	W	Color	packing
MGTP-15	15	BK , WE , RD	10M/Roll
MGTP-20	20	YW , BE , GN	3M/Roll is available upon request

- Material: Hook Side: PP, Loop Side: Nylon
- Color: Black (BK), White (WE), Red (RD), Yellow (YW), Blue (BE), Green (GN)
- Application: Cord and cable management (UTP/STP/FIBER), wire harnesses, prevent interruption to transmission speed when using traditional Nylon cable ties. Reusable and easy to install.

# NYLON CABLE TIE WITH STOPPER

Unit: mm

Part No.	L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
CVS-140	142	5 1/2"	3.2	20	40	18	100pcs
CVS-190	190	7 1/2"	4.8	45	50	22	
CVS-380XL	380	15"	12.7	105	250	114	

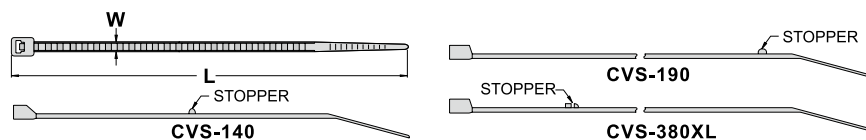


- Material: UL approved Nylon 66, 94V-2

# COATED COPPER TUBE CABLE TIE

Unit: mm

Part No.	L		W	Max.Bundle Dia.	packing
	mm	inch			
AT-250	235	9 1/4"	20	65	100pcs
AT-290	275	10 13/16"	20	75	

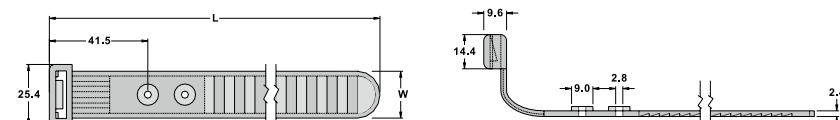

- Material: Polyethylene PE.
- Color: Natural
- Function: Special for coated copper pipe in air conditioner

## HOOK TIE

Unit: mm

Part No.	Cable Tie Length	Content	Color	packing
DP-2-A05NYW	150	Star	Yellow	2 pcs / Bag
DP-2-A06PK	150	Flower	Pink	
DP-2-A11NOE	150	Ribbon	Orange	
DP-2-A02NGN3	150	Clover	Green	

- Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation, not apt to age.
- Function: Using it in your kitchen, bathroom or bedroom, even on your stroller, convenient for bundling and hanging stuff.
- Feature:
  1. Two-directions hook tie.
  2. 360 degree rotatable hook fits any direction.
  3. Releasable, reusable and environment friendly.
  4. The load is up to 1.5Kgf proved by SGS laboratory.
- ※ Special color, length, design, package available on request.



**PATENT**



## LUGGAGE TIE


Unit: mm

Part No.	L1		L2		W	packing
	mm	inch	mm	inch		
DP-2-DE1NGN3	150	6 "	200	8 "	4.8	2 pcs /Bag

- Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation, not apt to age.
- Color: Blue
- Function: By means of double lock, bind wires or restrict action immediately.
- Feature:
  1. Bundling two things with single tie.
  2. Smooth is inside so it won't hurt hands or wires.
  3. Environmental friendly, wear and impact resistant, easy to carry.
- ※ Special color, length available on request.



**PATENT**

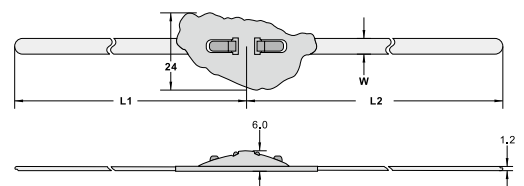

# ROLLER BALL STAINLESS TIES


Unit: mm

Part No.		L		W	lbs	Max.Bundle Dia	Packing	
Grade 316SS	Grade 304SS	mm	inch					
BST-127	BCT-127	127	5"	4.6	100	25	100 pcs	
BST-152	BCT-152	152	6"	4.6	100	33		
BST-201	BCT-201	201	8"	4.6	100	51		
BST-266	BCT-266	266	10 1/2"	4.6	100	69		
BST-300	BCT-300	300	11 7/8"	4.6	100	80		
BST-362	BCT-362	362	14 1/4"	4.6	100	102		
BST-521	BCT-521	521	20 1/2"	4.6	100	152		
BST-679	BCT-679	679	26 3/4"	4.6	100	203		
BST-838	BCT-838	838	33"	4.6	100	254		50 pcs
BST-127L	BCT-127L	127	5"	7.9	250	25		100 pcs
BST-152L	BCT-152L	152	6"	7.9	250	33		
BST-201L	BCT-201L	201	8"	7.9	250	51		
BST-266L	BCT-266L	266	10 1/2"	7.9	250	69		
BST-300L	BCT-300L	300	11 7/8"	7.9	250	80		
BST-362L	BCT-362L	362	14 1/4"	7.9	250	102		
BST-521L	BCT-521L	521	20 1/2"	7.9	250	152		
BST-679L	BCT-679L	679	26 3/4"	7.9	250	203		
BST-838L	BCT-838L	838	33"	7.9	250	254	50 pcs	

• Available In either 304 or 316 grade stainless steel.



- Material : Stainless Steel 316SS or 304SS
- Suit for engineering, aviation, ship area.
- Feature: Fast locking function, can be quick & easy installed. Designed for indoor and outdoor severe environmental conditions of high-humidity, high-temperature, and coldness in environmental conditions.




# STAINLESS STEEL TIE WITH COATING

Unit: mm

Part No.	L		W	lbs	Max.Bundle Dia	Packing	
	mm	inch					
BSTC-127	127	5"	4.6	100	25	100 pcs	
BSTC-152	152	6"	4.6	100	33		
BSTC-201	201	8"	4.6	100	51		
BSTC-266	266	10 1/2"	4.6	100	69		
BSTC-300	300	11 7/8"	4.6	100	80		
BSTC-362	362	14 1/4"	4.6	100	102		
BSTC-521	521	20 1/2"	4.6	100	152		
BSTC-679	679	26 3/4"	4.6	100	203		
BSTC-838	838	33"	4.6	100	254		50 pcs
BSTC-127L	127	5"	7.9	150	25		100 pcs
BSTC-152L	152	6"	7.9	150	33		
BSTC-201L	201	8"	7.9	150	51		
BSTC-266L	266	10 1/2"	7.9	150	69		
BSTC-300L	300	11 7/8"	7.9	150	80		
BSTC-362L	362	14 1/4"	7.9	150	102		
BSTC-521L	521	20 1/2"	7.9	150	152		
BSTC-679L	679	26 3/4"	7.9	150	203		
BSTC-838L	838	33"	7.9	150	254	50 pcs	



- Material: Stainless Steel 316SS with Epoxy coating.
- Suit for engineering, aviation, ship area.
- Feature: Fast locking function, can be quick & easy installed. Special Epoxy coating to make stainless steel cable tie more insulation, anti-corrosion. Designed for indoor and outdoor severe environmental conditions of high-humidity, high-temperature, and coldness in environmental conditions.




## LADDER TYPE STAINLESS STEEL TIE WITH COATING

Unit: mm

Part No.	L		W	Max.Bundle Dia	packing
	mm	inch			
ASTN-150	150	6"	7	35	100 pcs
ASTN-195	195	7 11/16"	7	49	
ASTN-225	225	9"	7	58	
ASTN-255	255	10"	7	68	
ASTN-300	300	11 7/8"	7	82	
ASTN-335	335	13 3/16"	7	93	
ASTN-375	375	14 3/4"	7	106	
ASTN-450	450	17 3/4"	7	130	
ASTN-610	610	24"	7	181	
ASTN-150L	150	6"	12	35	50 pcs
ASTN-195L	195	7 11/16"	12	49	
ASTN-225L	225	9"	12	58	
ASTN-255L	255	10"	12	68	
ASTN-300L	300	11 7/8"	12	82	
ASTN-335L	335	13 3/16"	12	93	
ASTN-375L	375	14 3/4"	12	106	
ASTN-450L	450	17 3/4"	12	130	
ASTN-610L	610	24"	12	181	



- Material: Stainless Steel 316SS with Nylon11 coating.
- Suit for engineering, aviation, ship area.
- Feature: Quick to fasten and adjustable length. Fast and easy application. Special Nylon11 coating to make stainless steel cable tie more abrasion resistance, weather sistance, impact resistance. Designed for indoor and outdoor severe environmental conditions of high-humidity, high-temperature, and coldness in environmental conditions.




## STAINLESS STEEL TIE WITH COATING

Unit: mm

Part No.	L		W	Max.Bundle Dia	packing
	mm	inch			
RSTN-152	152	6"	6.3	35	50 pcs
RSTN-229	229	9"	6.3	60	
RSTN-305	305	12"	6.3	84	
RSTN-457	457	18"	6.3	132	
RSTN-610	610	24"	6.3	181	
RSTN-152L	152	6"	9.5	35	
RSTN-229L	229	9"	9.5	60	
RSTN-305L	305	12"	9.5	84	
RSTN-457L	457	18"	9.5	132	
RSTN-610L	610	24"	9.5	181	



- Material: Stainless Steel 316SS with Nylon11 coating.
- Suit for engineering, aviation, ship area.
- Feature: Quick to fasten and re-used. Fast and easy application. Special Nylon11 coating to make stainless steel cable tie more abrasion resistance, weather resistance, impact resistance. Designed for indoor and outdoor severe environmental conditions of high-humidity, high-temperature, and coldness in environmental conditions.



BANDEX Cable Accessories

# INSULATING



## SPIRAL BINDINGS

### ◆ PE

Part No.	O.D	T	W	Wrapping range (mmØ)	Packing	Part No.	Packing
SW-3	3	0.5	4.7	1.5~10	PE 10M/roll		
SW-6	4.5	0.6	6.7	2.5~15			
SW-6L	6	0.6	7.4	4~25			
SW-6.5	6.5	0.55	7.9	5~25			
SW-8	8	0.75	12	6~30		SW-8-400M	400M /box
SW-10	10	0.8	12.3	7.5~30		SW-10-250M	250M /box
SW-12	12	0.85	15	9~32		SW-12-170M	170M /box
SW-15	15	1	15.5	12~35		SW-15-120M	120M /box
SW-19	19	1.2	19.2	15~50		SW-19-80M	80M /box
SW-24	24	1.3	21.5	20~100		SW-24-50M	50M /box

### ◆ HDPE

Part No.	O.D	T	W	Wrapping range (mmØ)	Packing
SW-30HYW	34	2.5	38	26~50	2M/roll
SW-60HYW	60	2.5	27	60~80	

### ◆ NYLON 6


Part No.	O.D	T	W	Wrapping range (mmØ)	Packing
SW-6N6	4.5	0.45	8	4~25	NYLON 10M/roll
SW-6LN6	6	0.52	8	4~25	
SW-6.5N6	6.5	0.55	7.4	5~25	
SW-8N6	8	0.7	12	6~30	
SW-10N6	10	0.7	12.5	7.5~30	
SW-12N6	12	0.7	16	9~32	
SW-15N6	15	0.8	16.8	12~35	
SW-19N6	19	0.9	19.4	15~50	
SW-24N6	24	0.9	20.5	20~100	

- Material: Made from PE material or NYLON6. Excellent in insulation and binding strength.
- Color: Standard in natural, Black. Colors available upon request.
- Description:
  1. Flexible construction enable bands to follow wire ways easily.
  2. Durable, reusable with retained spiral strength.
  3. Fix ends of band with **BANDEX** cable ties and spiral wire bundles in clockwise direction to complete works.
  4. Expand spiral range almost without limit.

A economical way of cable binding. Easily applied to electric harness cables and wire bundles. Cut-to-fit versatility in convenient roll-form.




100 FT (30.5M) / roll

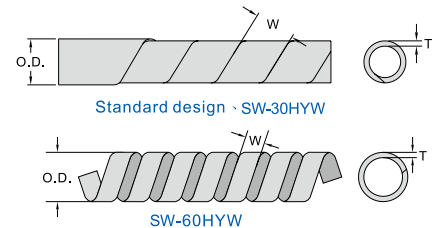

## SLIT WRAPPING BAND

Part No.	O.D	T	W	Wrapping range (mmØ)	Packing
KL-8BK	8	0.8	9	10	5M / roll
KL-15BK	15	0.8	13	16	
KL-20BK	20	0.9	15	22	
KL-25BK	25	1.3	18	27	
KL-32BK	32	1.3	23	35	

- Material : PP.
- Color : Black, other color available upon request
- Application :
  1. Cut into suitable length, and use the special tool to wrap band the wire easily.
  2. Hold the topside of wire with installation tool, and draw down to wrap the wire immediately by easy and fast.
  3. This wire band designed to be easy off and re-usable, the tensile power will be remain after every wrap and peel.
- Tensile power : Easily applied and safety to protect cables and wire bundles from damage and electric harmless.



Unit: mm


Unit: mm

# SLIT WRAPPING BAND INSTALLATION TOOL

Unit: mm

Part NO.	D	To Be Used With	Packing
KT-8BK	8	KL-8BK	10 pcs
KT-15BK	15	KL-15BK	
KT-20BK	20	KL-20BK	
KT-25BK	25	KL-25BK	
KT-32BK	32	KL-32BK	

- Material : P.P.
- Color : Black

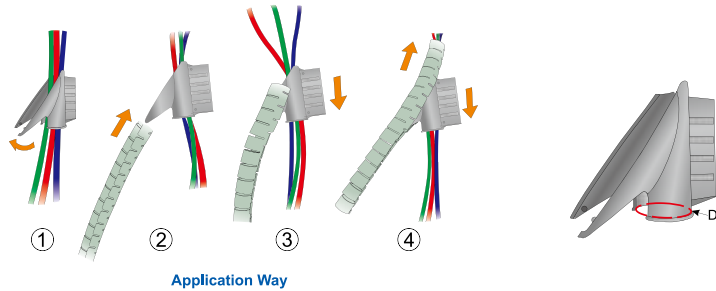


# WRAPPING BAND

Unit: mm

## Button Type

Part NO.		Button Distance(mm)	Max. Bundle Dia. (mm)	Packing
Grey	Black/Grey			
WB-40	WBS-40	40	12	60Yards/RL (55Meters)
WB-47	WBS-47	47	15	
WB-60	WBS-60	60	20	
WB-80	WBS-80	80	25	
WB-100	WBS-100	100	30	
WB-128	WBS-128	128	40	
WB-140	WBS-140	140	44	
WB-150	WBS-150	150	47	
WB-160	WBS-160	160	50	
WB-182	WBS-182	182	57	
WB-222	WBS-222	222	70	
WB-315	WBS-315	315	100	
WB-475	WBS-475	475	150	

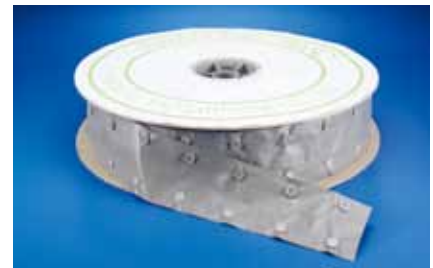

## Tape Type

Part NO.	Band width (mm)	Max. Bundle Dia (mm)	Packing
WBT-48	48	9	60Yards/RL (55Meters)
WBT-63	63	15	
WBT-84	84	20	
WBT-100	100	25	
WBT-115	115	30	
WBT-147	147	40	
WBT-183	183	50	
WBT-246	246	70	
WBT-340	340	100	

cut-to fit versatility in convenient roll-form

- Material: PVC Flamability rating 94V-0
- Application:
  1. Good for cable wrapping
  2. Easy to wrap. Re-usable


## BINDING BAND

Part No.	W	L	Packing
A-6	6	10M	10M/bag
A-8	8	10M	
A-10	10	10M	
A-12	12	10M	
A-6B	Buttons For Band		100pcs/bag
A-8B			
A-10B			
A-12B			



Unit: mm

- Constructed of natural PVC which is outstanding in resisting effects of water, grease, chemicals.
- Used for fastening or supporting cable, pipe, wire bundles, wire harness.
- Low cost for permanent application.  
Button up band is all.



## BINDING BAND

Part NO.	Size	Packing
B-1	1.0mm	1 Bundle

- Diameter: 1m/m (solid)
- Color: Natural white
- Packing: per bundle
- Material: PVC



Unit: mm

## VINYL TIE

### Part NO: M-1

Color: Black (Red \ White \ Blue \ Yellow or Green color is available)



## PET TIE

### Part NO: PET-1


Color: Black \ White  
※ No Metal inside



## SNAP BAND

Part NO.	Size	Packing
SNB-03	As Figure	100pcs/bag

- Material: UL approved NYLON 66, 94V-2

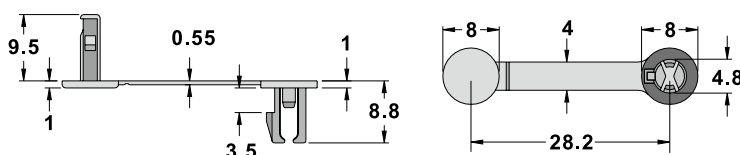

Unit: mm

**BANDEX** Cable Accessories


# CABLE CLAMPS



## CABLE CLAMPS

Unit: mm

Part No.	Bolt Hole		Size				Packing
	A	B	C	D	E	F	
CC03	4.8	8	9.6	3.1 (1/8")	16.9	1.05	100pcs
CC05	4.8	9.2	9.6	5.0 (3/16")	18.5	1.05	
CC06	4.6	10.4	10.1	6.35 (1/4")	20	1.1	
CC07	4.8	11.2	10	7.2 (9/32")	22.6	1.15	
CC08	5	11.2	10	7.9 (5/16")	22.6	1.15	
CC10	5	12.5	12.3	9.5 (3/8")	26.6	1.4	
CC13	5	14.8	12.2	12.7 (1/2")	30.3	1.4	
CC16	5	15.8	12.4	15.8 (5/8")	32.6	1.4	
CC19	4.8	18	11.8	19.4 (3/4")	37.3	1.4	
CC25	5	21	12	25.4 (1")	43.4	1.4	
CC28	4.8	26	12.6	27.5 (1 1/16")	51.5	1.7	
CC32	4.7	26	12	31.8 (1 1/4")	52.3	1.6	
CC38	4.8	27.8	12.5	36.7 (1 1/2")	58.3	1.5	

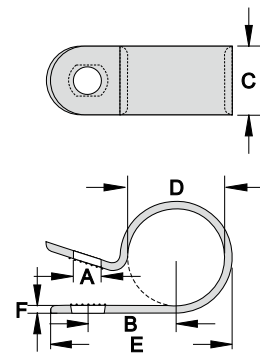


- Material: UL approved NYLON 66, 94V-2
- CABLE CLAMPS are designed to hold cables, tubes, and components in domestic appliance, electronics and electric apparatus generally.
- Interior edges are radiused to protect cable insulation.
- To apply, just clamp down on loosen cables and screw it to chassis.
- Black color available.

## ADJUSTABLE CABLE CLAMP

Unit: mm

Part No.	A	B	C	D	Max. Bundle Dia	Packing
PC-0406	5	13	23.5	10.4	4.8~6.4	100pcs
PC-0609	5	13	30.5	16.1	6.7~9.5	
PC-0914	5	13	40.0	20.7	9.5~14.3	




- Material: UL approved NYLON 66, 94V-2
- Feature: Oval hole design for adjustable of bundling size.

## CABLE CLAMP

Unit: mm

Part No.	A	B	C	D	E	F	Packing
KUC-5	4.4	11.6	8.5	5	20	1.3	100pcs


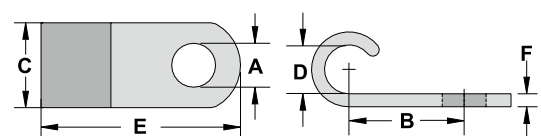


- Material: UL approved NYLON 66, 94V-2


# SELF ADHESIVE TIE MOUNT

Unit: mm

Part No.	L	W	H	Mounting Hole	T	packing
TM-1212-4S4	12.5	12.5	3.2		3.2	100pcs
TM-1919-4S2	19.5	19.5	3.9	3.2	4.6	
TM-1919-4	19.5	19.5	3.9	3.2	4.6	
TM-2121-4	21.8	21.8	4.0		4.8	
TM-2828-4	28.6	28.6	5.3	5.0	5.5	
TM-2828-2	29.2	29.2	5.4	5.0	5.0	
TM-2525-4	26.1	26.1	6.0	4.3	8.0	
TM-1818R	18.9	18.9	4.6	4.8	4.2	
TM-2626R	26.3	26.3	6.0	5.0	5.6	
TM-1818T	19.0	19.0	5.0	4.4	4.1	
TM-2626T	26.5	26.5	7.4	4.3	5.8	
TM-3838	38.5	38.5	7.6	5.0	10.2	

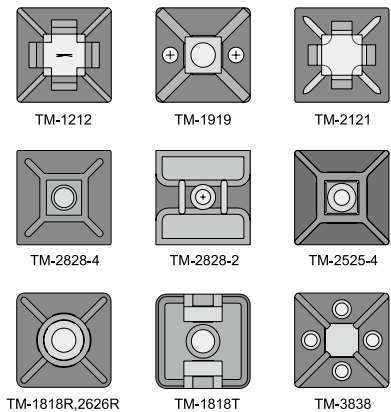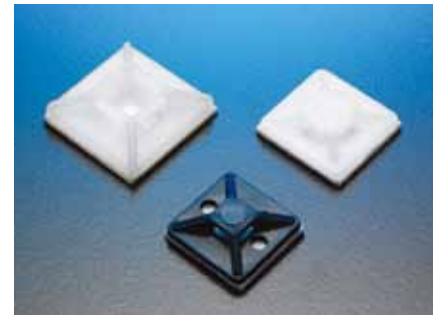

- Material: UL approved NYLON 66, 94V-2 (Backed with adhesive tape)
- SELF-ADHESIVE TIE MOUNTS is designed to support light weigh wire bundles when properly applied on any clean, smooth, grease free surface. For heavy support. mounting hole is provided for screws.
- To apply, simply peel off backing paper and apply mount to surface after that, cable ties can be inserted to secure wire bundles.
- Black color available.
  - ※ TM-1212-4S4: 4pcs on a strip (Simply peel off backing paper)
  - ※ TM-1919-4S2: 2pcs on a strip(Simply peel off backing paper)




# SCREW MOUNT BASES

Unit: mm

Part No.	H	L	W	T	B	packing
TM-0	5.0	19.6	9.5	5.2	3.7	100pcs/bag
TM-0M	5.0	19.0	9.5	5.0	4.3	
TM-0L	5.0	19.0	9.5	5.0	5.2	
TM-0R	6.2	19.1	10	5.4	4.2	
TM-1	7.0	15.0	10	5.1	3.5	
TM-1S	5.8	12.8	7	4.0	3.3	
TM-2S	9.8	23	16	9.0	5.0	
TM-2	9.8	23	16	9.0	6.3	
TM-2A	10.4	20.5	17.1	10.4	6.0	
TM-2L	9.8	23	16	9.0	6.5	
TM-3	17.5	23	13.8	9.5	5.3	
TM-4	11.6	30	14.7	9.3	5.0	
TM-5	10.0	21.5	16.0	7.8	5.8X9.7	



- Material: UL approved NYLON 66, 94V-2
- Saddle design provide maximun stability to wire bundles.
- To apply, simply fix mount with a screw and secure wire bundles with BANDEX nylon cable ties.
- To apply with Bandex nylon cables ties: TM-0: CT075-2C, CT094-2C,...., CT280-4C, CT310-4C TM-1: CT075-2C, CT094-2C,....,CT280-4C, CT310-4C TM-2: All applicable size.

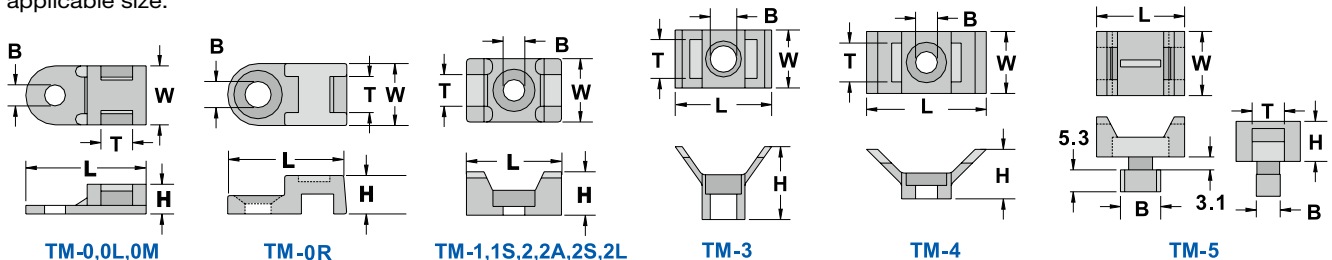

## WALL PLUG MOUNT


Unit: mm

Part No.	Dimension			Mounting Hole	Packing
	A	B	T		
MPM-5	24.4	6.1	5.8	5	100pcs
MPM-6	24.7	6.3	9.9	6	
MPM-8	37.5	6.3	9.7	9	
MPM-8H	36.0	5.9	9.4	9	
MPM-9	36.2	13.0	9.7	9	
MPM-9H	36.1	15.2	9.6	9	

• Material: UL approved NYLON 66, 94V-2



CABLE CLAMPS

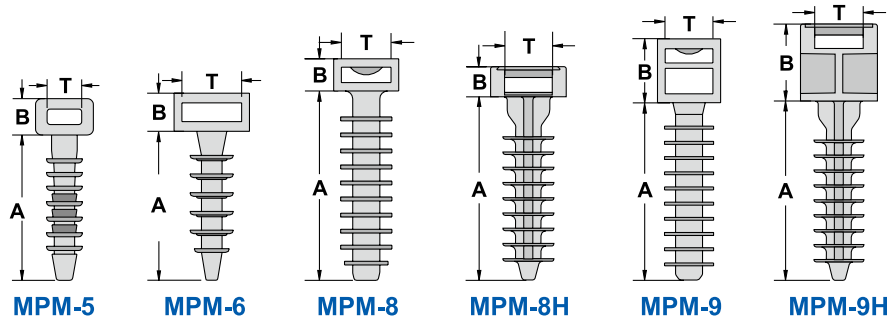


## WALL PLUG MOUNT

Unit: mm

Part No.	Dimension		Mounting Hole	Packing
	A	B		
CWP-38	37.6	6.8	8.0	100pcs

• Material: UL approved NYLON 66, 94V-2




# PUSH TIE MOUNT

Unit: mm

Part No.	T	Mounting Hole	Packing
PHC-4	3.8	4.8	100pcs
PHC-5	5	7	
PHC-5L	5	7	
PHC-6.5	6.5	As Figure	
PHC-8	8.1	6.2	
PHC-9	9.4	As Figure	
PHC-1105	11	As Figure	
PHC-1509	7.8	6	



- Material: UL approved NYLON 66, 94V-2
- Drill hole on board to fix tie mount and then insert tie into the mount for bundling cables.

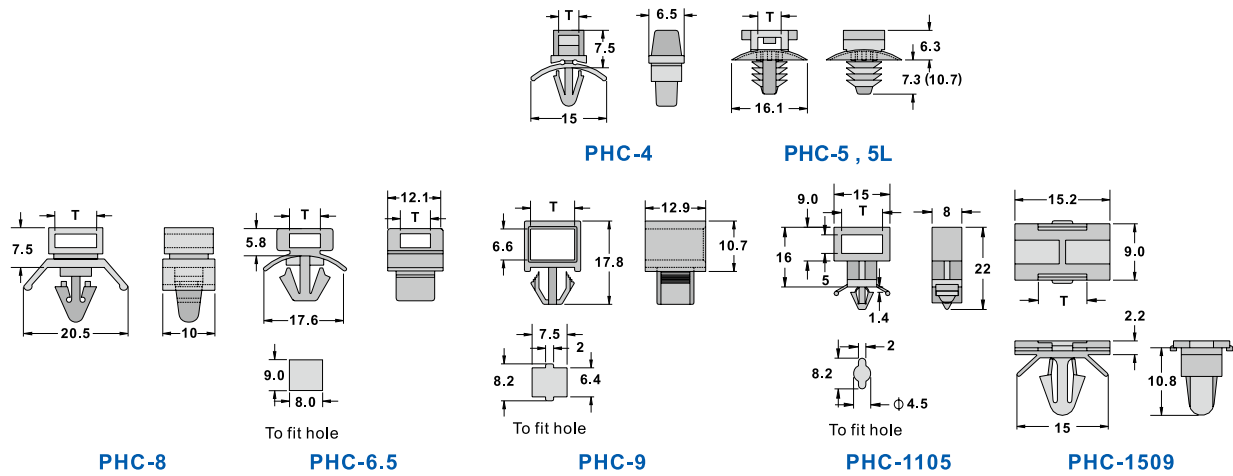


# TWIN TIE DEVICE

Unit: mm

Part No.	Dimension				Packing
	H	L	W	T	
DH-10	9.3	21.3	13.9	9.3	100pcs
DH-11	9.3	21.3	15	10.5	
DH-16	8.7	20.8	21.4	17.5	
DH-20	8.7	20.8	25.4	21.5	




- Material: UL approved NYLON 66, 94V-2

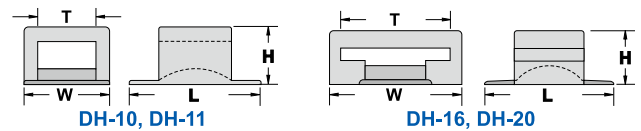


## LADDER TYPE CABLE HOLDER

Unit: mm

Part NO.	H	Packing
LCH-60BK	60	50pcs
LCH-120BK	120	
LCH-160BK	160	

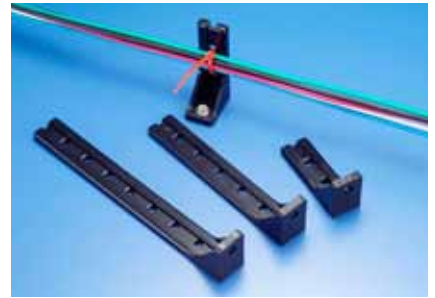

- Material: UL approved Nylon 66, 94V-2
- Color: Black
- Simply fix the holder with a screw and secure wire bundles with cable ties width of up to 4.8mm.

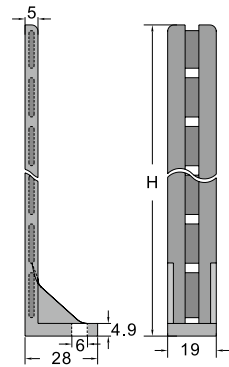


CABLE CLAMPS

## SELF-ADHESIVE CABLE CLAMP

Unit: mm

Part No.	Size						Packing
	AØ	BØ	T1	L	W	H	
4J-S	5.5	5.0	3.0	25.8	13.4	12.2	100pcs
6J-S	7.5	5.0	3.2	28.8	13.4	14.5	
8J-S	12.0	5.3	3.0	34.8	16.5	18.5	
10J-S	14.0	5.0	3.2	36.5	16.4	19.5	
11J-S	15.0	5.0	2.7	38.2	16.0	20.3	
12J-S	17.0	4.8	3.1	43.5	15.6	25.0	


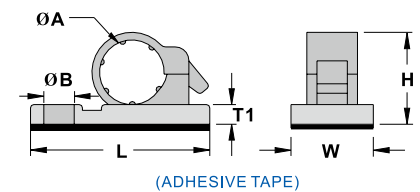


- Material: UL approved BLACK NYLON 66, 94V-2 (Backed with adhesive tape)
- Backed with a high quality tape. Designed to secure wire bundles where fixing holes are impractical. Can be quickly applied to almost any clean, smooth and grease-free surface. (Also provided with a mounting hole)
- Color: Black

# PUSH TIE MOUNT

Part NO.	A	B	C	D	E	F	Packing
PFS-10	10.1	17.2	28.4	20.7	11.9	14.3	100pcs
PFS-15	14.9	19.3	31.8	27.1	14	16.3	
PFS-18	17.3	21.2	35	29	15.9	18.3	


● Material: UL approved grey NYLON 66, 94V-2

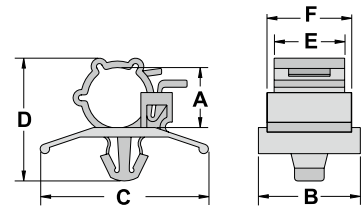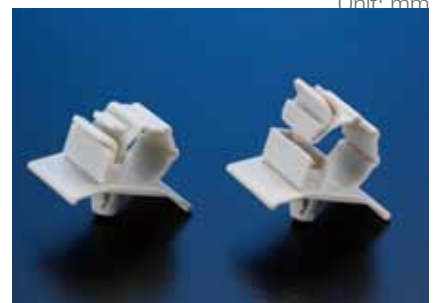

# ADJUSTABLE CABLE CLAMPS

Part No.	AØ mm	B	C	D	E	F	Packing
AP-0810	7.9~10.3	25.4	22.2	19.1	1.6	10.2	100pcs
AP-1013	10.0~12.5	31.8	27.8	19.1	1.6	10.2	
AP-1316	12.6~15.4	37.0	31.8	18.4	3.0	12.1	
AP-1720	16.5~20.1	42.0	37.0	25.0	3.0	12.7	
AP-2225	22.2~25.4	41.8	43.8	21.5	3.0	11.3	

- Material: UL approved Black NYLON 66, 94V-2 (Backed. with adhesive tape)
- One size of adjustable clamp can accommodate various cables that will save your cost stock.
- Easy to install, open for unlimited usage.
- Color: Black



ADHESIVE TAPE


## CABLE CLAMP

Unit: mm


Part No.		AØ mm	B mm	C mm	Packing
Adhesive	Push				
TS-0607	PTS-0607	6~7	20.0	25	100pcs
TS-0708	PTS-0708	7~8	20.0	25	
TS-0910	PTS-0910	9~10	24.5	30	
TS-1214	PTS-1214	12~14	24.5	30	
TS-1618	PTS-1618	16~18	24.5	30	



- Material: UL approved grey NYLON 66, 94V-2
- Two stage lock design to accommodate different cable size in one clamp.
- Same clamp available in both "STICKY" and "PUSH MOUNT" design.
- Color: Grey



**TS-TYPE (ADHESIVE)**



**PTS-TYPE (CHASSIS HOLE  
Ø4.8 PVSH )**


## ADJUSTABLE CABLE CLAMP

Unit: mm

Part No.	A	B	C	L	Max. Bundle Dia. (mm)	Packing
ATC-17	25.0	18.0	7.9	70	17.0	100pcs
ATC-22	30.5	21.0	12.0	90	22.0	
ATC-26	30.5	21.0	12.0	108	26.0	



- Material: UL approved Natural NYLON 66, 94V-2

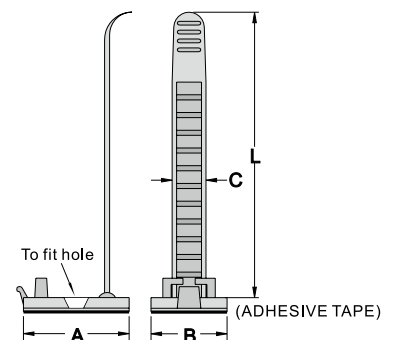


# SELF-ADHESIVE WIRE CLAMPS

Unit: mm

Part No.	L	L1	W	W1	H	H1	Packing
FC-1	13	8	9.5	6.5	5.2	2.8	100pcs
FC-2	16	4	15.5	9	6.8	4.0	
FC-3	16	12.5	16	7.2	6.8	3.7	
FC-4	27	14.8	17	7.3	8.7	5.5	
※FC-0601	19.1	6.4	12.9		2.2	0.9	
FC-1001	11.9	9.3	6		3.5	1.0	
FC-1206	16	11.9	15.8	8.9	9	5.8	



- Material: UL approved Natural NYLON 66, 94V-2
- ※FC-0601 MATERIAL IS ABS WITH UL APPROVAL, FLAME RATING IS 94HB

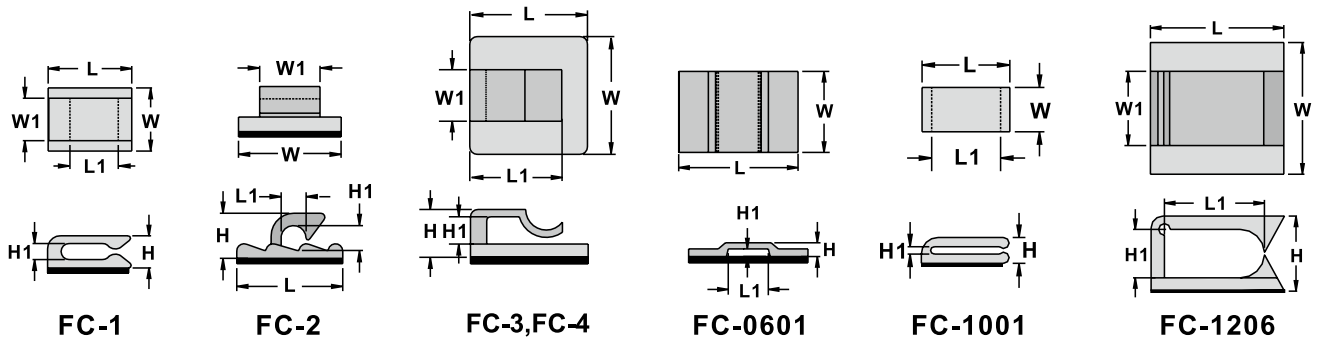


CABLE CLAMPS


# SELF-ADHESIVE WIRE CLAMPS

Unit: mm

Part No.	L	L1	W	W1	H	H1	Packing
FC-0605	19	5.9	19	10	7.2	4.9	100pcs
FC-1208	26.8	11.9	26.5	12.3	11.7	8.3	
FC-1813	25.6	17.8	25.5	15.8	17.2	13.3	
FC-2211	33.3	22.2	28.3	18.7	15.2	11.1	

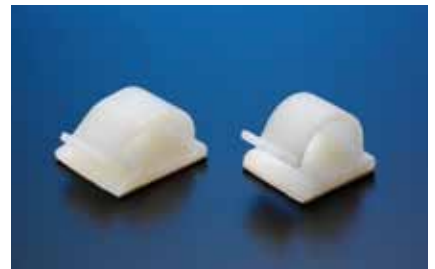

- Material: UL approved Natural NYLON 66, 94V-2


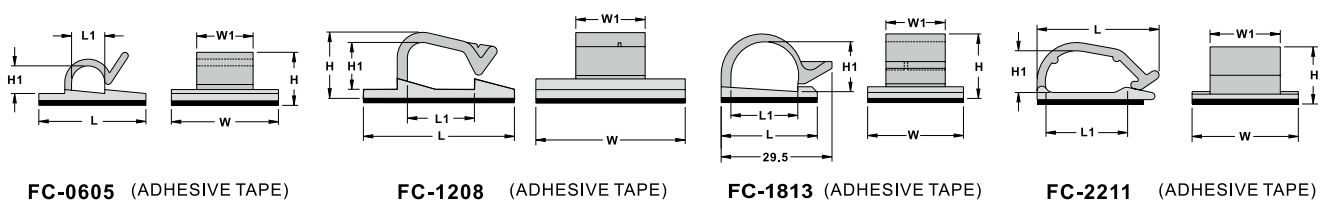


## MOUNTING WIRE CLIP

Unit: mm

Part NO.	L	L1	W	W1	H	H1	Packing
MFC-1002	20.2	9.8	10.2	5.2	6.0	2.2	100pcs

- Material: UL approved Natural NYLON 66, 94V-2

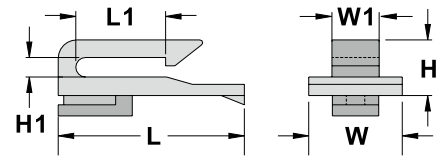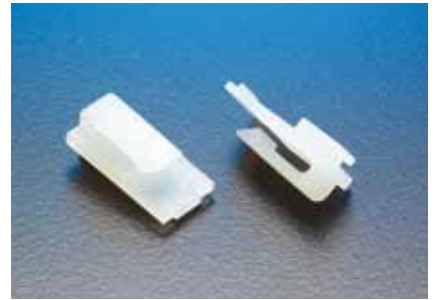


## WIRE CLIP

Unit: mm

Part NO.	L	L1	W	W1	H	H1	Packing
FC-0903	12.8	8.9	9.8	6.6	5.0	2.8	100pcs

- Material: UL approved Natural NYLON 66, 94V-2

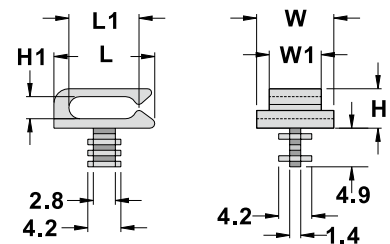


# WIRE CLIP

Unit: mm

Part NO.	L	W	H	H1	Packing
WH-4	18.7	12.8	6.0	4.4	100pcs

- Material: UL approved Natural NYLON 66, 94V-2




# CATV SIDING CLIP

Unit: mm

Part NO.	D	L	W	H	Packing
CATV-1	5.5	21.1	12.8	8.7	100pcs

- Material: UL approved Black NYLON 66, 94V-2 (Backed with adhesive tape)
- Designed for installation of (1/4 diam) RG-59 (u) type cable.
- Color: Black

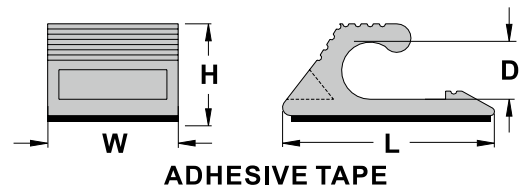


# SELF-ADHESIVE WIRE CLIP

Unit: mm

Part NO.	W	L	H	Packing
VC-2	16.5	21.5	6.2	100pcs

- Material: PE (White)

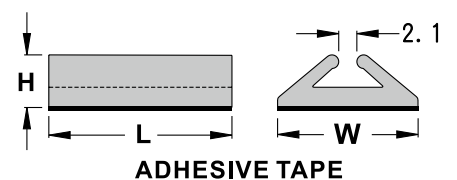


## SELF-ADHESIVE WIRE CLIP

Unit: mm

Part No.	L	W	H	Packing
VC-0606	8.8	18	10.7	100pcs

- Material: UL approved NYLON 66, 94V-2
- Color: Natural, available in other colors.


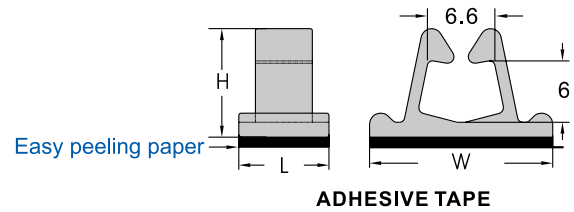


## CABLE CLAMP

Unit: mm

Part NO.	Dimension	Packing
DCC-15	As Figure	100pcs

- Material: UL approved NYLON 66, 94V-2

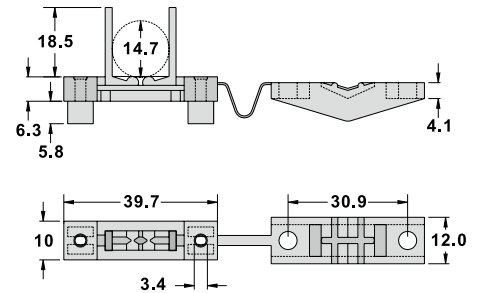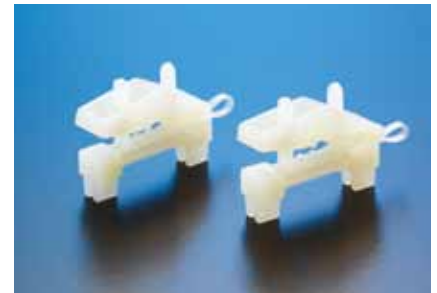


## CABLE CLAMPS AND CLIPS

Unit: mm

Part No.	A	B	C	Packing
RC-34	4.1	14.3	4.1	100pcs

- Material: UL approved NYLON 66, 94V-2





# SELF-ADHESIVE WIRE CLIP

Unit: mm

Part No.	A	B	C	Packing
SWC-610	11.0	9.2	8.4	100pcs/bag





- Material: UL approved NYLON 66,94V-2

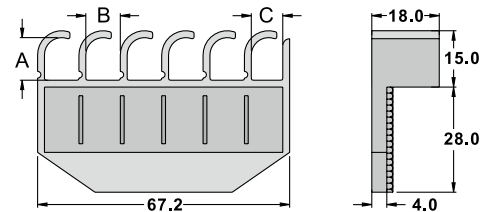

# SELF-ADHESIVE FLAT CABLE CLAMPS

Unit: mm

Part NO.	L	W	H	Packing
RC15	15	24	9	100pcs
RC20	20	24	9	
RC25	25	24	9	
RC28	28	24	9	
SFC-15	15	13	6	
SFC-20	20	13	6	
SFC-25	25	13	6	
SFC-28	28	13	6	

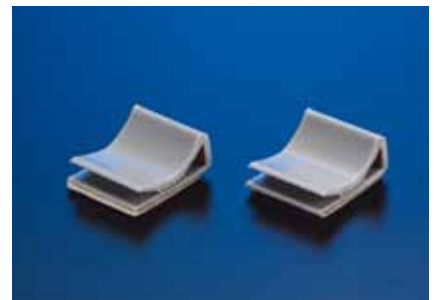

- Made of finest PVC backed with quality adhesive tape.
- Conduct your flat cable neatly and firmly.
- Insert your cable into the clamp and your job is done.
- Color: Grey


ADHESIVE TAPE

# CABLE CLAMP

Unit: mm

Part No.	L	W	H	H1	Packing
RCL-12	28.5	25.4	13.8	11.4	100pcs

- Material: Made of finest PVC backed with quality adhesive tape.
- Color: Grey




ADHESIVE TAPE

## CABLE CLAMP

Unit: mm

Part No.	L	W1	W2	Packing
CL-15	15	18.5	16	100pcs
CL-20	20	18.5	16	
CL-25	25	18.5	16	
CL-28	28	18.5	16	



ADHESIVE TAPE

- Made of finest PVC backed with quality adhesive tape.

CABLE CLAMPS


## FLAT CABLE CLAMP

Unit: mm


Part No.	Size						For Cable	Packing
	A	B	C	D	E	F		
FC-30	32.0	6.2	45.8	19.2	14.9	2.8		100pcs
FC-40	39.5	6.2	53.3	19.2	14.8	2.6		
FC-50	63.5	6.0	77.5	19.3	14.9	2.8	50PIN	
FCT-30	31.8	11.3	45.1	18.5	16.0	16.3	30PIN	
FCT-40	54.0	11.3	67.0	15.7	12.0	16.3	40PIN	
FCT-50	65.0	11.3	78.4	18.6	15.8	16.3	50PIN	
FC-635	63.5	6.4	76.2				50PIN	
FC-776	77.6	6.4	90.0				60PIN	
FCP-315	31.4	7.6	44.7	19.1	15.2	12.4	30PIN	
FCW-50	52.2	7.0	56.8	26.2	23.0	13.0	30PIN	




- Material: UL approved NYLON 66, 94V-2
- Clamp down ribbon cable by finger pressure.
- Color: Natural




FC-30,40,50 (ADHESIVE TAPE)




FCT-30,40,50 (ADHESIVE TAPE)



FC-635,FC-776



FCP-315 (to fit 6mm hole)

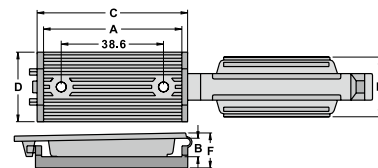


FCW-50

# CABLE CLAMP

Unit: mm

Part No.		D	D1	L	Packing
PVC	PCV				
CW3-32	CWC3-32	7.5	3.3	32.1	100pcs
CW3-52	CWC3-52	7.5	3.3	52.1	
CW3-60	CWC3-60	8.0	3.6	62.1	
CW4-35	CWC4-35	8.5	4.2	35.2	
CW4-50	CWC4-50	8.0	4.2	52.2	
CW4-75	CWC4-75	7.5	4.2	74.5	
CW4-78	CWC4-78	8.0	4.2	78.5	
CW5-70	CWC5-70	8.5	5.1	69.3	
CW6-78	CWC6-78	10.0	6.0	78.0	
CW10-95	CWC10-95	16.0	10.0	95.0	
CW10-115	CWC10-115	16.0	10.0	115.0	

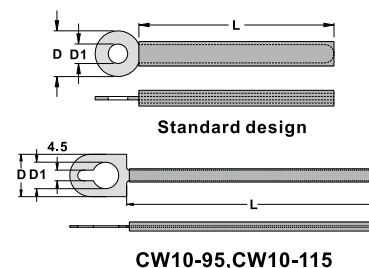


- Material: Steel with PVC tube.

# SELF-ADHESIVE WIRE CLIP

Unit: mm

Part No.	Dimension					Packing
	A	B	C	D	E	
MWC-15	19.4	10.0	15.0	5.0	0.5	100pcs
MWC-25	25.0	15.0	25.0	5.0	0.5	




- Material: Metal (with adhesive tape)

# PAPER ROLL CLIP

Unit: mm

Part No.	Dimension	Packing
PRP-35	As Figure	100pcs




- Material: ABS (Natural).

## SNAP CLAMP

Unit: mm

Part No.	T	Ø D	Packing
SHW-13	1.8	11.9 ~ 13.5	100pcs
SHW-15		13.5 ~ 15.1	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Feature: 1. one size of adjustable snap clamp can accommodate various cables that will save your cost stock.  
2. easy to install and fast to fix.




## PIPE CLIP

Unit: mm

Part No.	For Pipe	W	L	H	Packing
	D				
PPC-16	16	21.8	14.6	24.4	50pcs
PPC-20	20	26.6	14.6	28.9	
PPC-25	25	33.5	14.6	32.8	

- Material: PE
- Screw the pipe clip to the wall, and push the pipe or cable into clip to fasten.
- Can be unlimited extended ( even between different items) with special buckle design on the sides. Pipe or cable is fastened to the clip in order. Easy application.

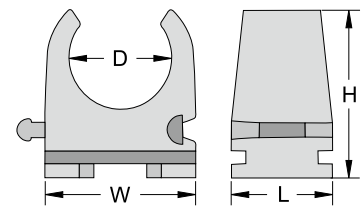


**BANDEX** Cable Accessories

# GLANDS



## SUPREME-METRIC IP68

Unit: mm

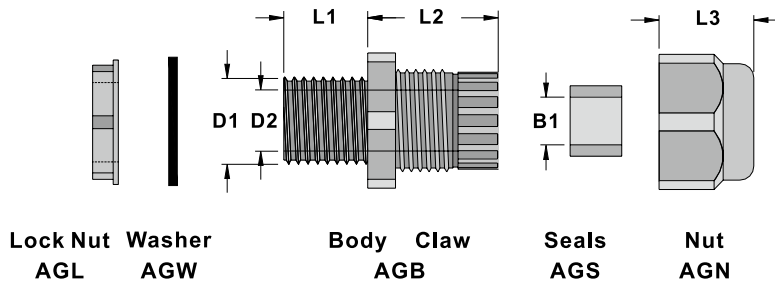


### METRIC THREAD

Part No.	Thread	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
AG-12	M12xP1.25	12~12.3	12	8.3	6.9	7.9	19.6	13.6	3~6.5	50pcs
AG-12L	M12xP1.5	12~12.3	12	8.3	6.9	7.9	19.6	13.6	3~6.5	
AG-12H	M12xP1.25	12~12.3	12	8.3	6.9	7.9	19.6	13.6	3~7.5	
AG-16	M16xP1.5	16~16.3	16	10.9	10.5	15.5	23.4	16.9	5~10	
AG-16S	M16xP1.5	16~16.3	16	10.9	10.5	10	23.4	16.9	5~10	
AG-20	M20xP1.5	20~20.3	20	15	14	15	28.5	18.5	10~14	
AG-20S	M20xP1.5	20~20.3	20	15	14	10	28.5	18.5	10~14	25pcs
AG-25	M25xP1.5	25~25.4	25	18.6	18.4	15.2	29.4	22.3	13~18	
AG-25S	M25xP1.5	25~25.4	25	18.6	18.4	10	29.4	22.3	13~18	
AG-32	M32xP1.5	32~32.4	32	26	25	14.7	34.5	25.7	18~25	
AG-40	M40xP1.5	40~40.4	40	33.7	33	18.4	41.7	31.3	22~32	
AG-50	M50xP1.5	50~50.4	50	41.9	40	17.8	44.2	31.3	30~38	
AG-63	M61xP1.5	61~61.4	61	55	44	18.5	44.6	32.7	34~44	
AG-63M	M63xP1.5	63~63.4	63	54.9	44	18.5	44.6	32.7	34~44	
AG-63L	M63xP1.5	63~63.4	63	56.6	51.5	25.4	49	36.8	42~50	50pcs
AG-12D	M12xP1.5	12~12.3	12	7.3	6.5	8	19.7	12.7	3~6.5	
AG-16D	M16xP1.5	16~16.3	16	10.7	10.1	8.2	23.3	16.1	5~10	
AG-20D	M20xP1.5	20~20.3	20	14.1	12.4	10	25	18.1	8~12	
AG-25D	M25xP1.5	25~25.4	25	18	17.1	8.2	30	20	11~17	
AG-32D	M32xP1.5	32~32.4	32	25.7	21.2	10	35.4	24.1	15~21	
AG-40D	M40xP1.5	40~40.4	40	32.7	28.2	10	39.4	27.5	20~28	10pcs
AG-50D	M50xP1.5	50~50.4	50	42.2	35.3	12	43.4	31.6	27~35	
AG-63D	M63xP1.5	63~63.4	63	55	42.4	16.7	46.4	33.7	32~42	

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Suit a variety of applications, and diverse industries.
- Function :Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, high degree of the protection IP68 preventing dust and water.
- Part number AG-D series, smaller size, suit for smaller cabinet.
- Available to order the accessories separately. Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, N for nut. For example, AGL-12 if you would like to only order locknut for M12x1.25

# SUPREME-METRIC IP68

Unit: mm

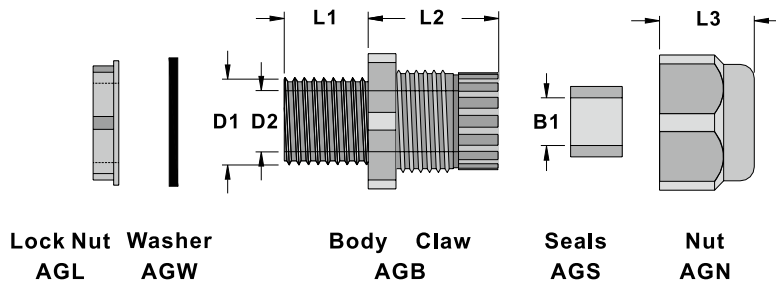

## PF THREAD (JIS STANDARD)

Part No.	Thread	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
AGJ-14	PF 1/4"	14~14.3	14	8.2	6.5	8	19.6	13.2	3~6.5	50pcs
AGJ-17	PF 3/8"	17~17.3	17	10.8	10.5	14.7	23.4	16.9	5~10	
AGJ-21	PF 1/2"	21~21.3	21	15	14	12.9	28.5	18.5	10~14	
AGJ-58	PF 5/8"	23~23.3	23	15	14	12.9	28.5	18.5	10~14	
AGJ-27	PF 3/4"	27~27.3	27	18.5	18.4	14.7	29.4	22.3	13~18	25pcs
AGJ-34	PF 1"	34~34.4	34	26	25	14.7	34.5	25.7	18~25	10pcs
AGJ-112	PF 1 1/2"	48~48.4	48	42	40	17.8	44.2	31.3	30~38	
AGJ-2	PF 2"	61~61.4	61	55	44	18.5	44.6	32.7	34~44	50pcs
AG-16F	PF 1/2"	20.8~21.1	20.8	11	10	9.5	20.7	18.7	5~10	
AG-20F	PF Thread	20.8~21.1	20.8	14.6	13	9.3	24.1	18.5	6~13	


- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Function : Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, high degree of the protection IP68 preventing dust and water.
- Available to order the accessories separately.

Follow the drawing and add the letter to the suffix part number, L for locknut, W for washer, B for gland body, S for seal, N for nut. For example, AGJL-14 if you would like to only order locknut for PF 1/4".

※ The degree of protection is IP68 for AGJ-17 and AGJ-34.

## SUPREME-PG THREAD IP68

Unit: mm

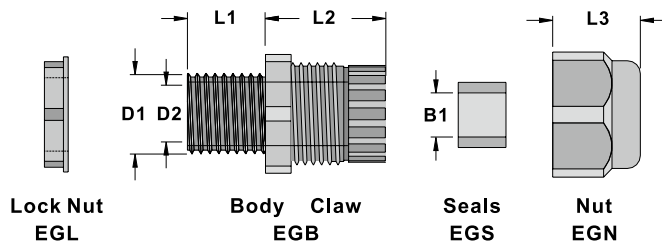

### PG THREAD (DIN STANDARD) WITHOUT WASHER ※Protection : IP68 ( only if the washer is assembled )

Part No.	Thread	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
EG-7	PG7	12.5~12.8	12.5	8.3	6.9	7.9	20	13.3	3.5~6	50pcs
EG-7LS	PG7	12.5~12.8	12.5	8.3	6.9	7.9	20	13.3	3.5~6	
EG-9	PG9	15.2~15.5	15.2	10.5	8	8.2	22	15.1	4~8	
EG-9L	PG9	15.2~15.5	15.2	10.5	8	14.7	22	15.1	4~8	
EG-11	PG11	18.6~18.9	18.6	13.2	10.5	7.9	23.7	18.3	5~10	
EG-11L	PG11	18.6~18.9	18.6	13.2	10.5	14.9	23.7	18.3	5~10	
EG-13.5	PG13.5	20.4~20.7	20.4	15.5	12	8.9	24.6	18.9	6~12	
EG-13.5L	PG13.5	20.4~20.7	20.4	15.5	12	15.8	24.6	18.9	6~12	
EG-16	PG16	22.5~22.8	22.5	17.2	14	9.8	26.2	19.5	10~14	25pcs
EG-21	PG21	28.3~28.7	28.3	22.4	18.4	10.8	30	23.7	13~18	
EG-29	PG29	37~37.4	37	30.6	25	10.8	35	27.4	18~25	10pcs
EG-36	PG36	47~47.4	47	35.3	35.5	14.5	42.3	30.3	22~32	
EG-42	PG42	54~54.4	54	40	40	14.5	44	31.2	30~38	
EG-48	PG48	59.3~59.7	59.3	46.2	46	16.7	42.7	31.3	34~44	


● Material: UL approved Nylon 66, 94V-2

● Color: Black, available in other colors.

※ EG-7LS has smaller nut.

# NYLON CABLE GLAND

Unit: mm

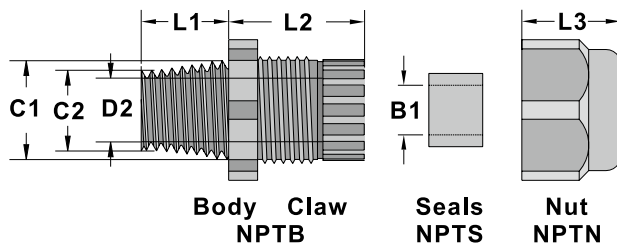


**NPT THREAD** ※ Available for Lock Nut and washer upon request

Part No.	Thread	Mounting Hole	Thread Outside Diameter		D2	B1	L1	L2	L3	Cable Range	Packing
			C1	C2							
NPT-14	1/4"-18 NPT	13.2~13.5	13.2	13.1	8.2	6.9	7.8	19.7	13.2	3-6.5	50pcs
NPT-38	3/8"-18 NPT	16.7~17.0	16.7	16.2	10.8	10.5	14.6	23.8	16.8	5-10	
NPT-12	1/2"-14 NPT	21.2~21.5	21.2	20.8	14.9	14.0	12.9	28.4	18.7	10-14	
NPT-34	3/4"-14 NPT	26.3~26.6	26.3	25.6	18.5	18.4	14.5	29.2	22.3	13-18	25pcs
NPT-1	1"-11.5 NPT	33.2~33.6	33.2	32.9	26.0	25.0	14.9	35.0	25.7	18-25	25pcs
NPT-114	1 1/4"-11.5 NPT	41.9~42.3	41.9	41.2	32.0	33.0	18.2	41.6	31.4	22-32	10pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- ※ Locknut and washer are available to be assembled upon request.

# RIGHT ANGLE NYLON CABLE GLAND

Unit: mm

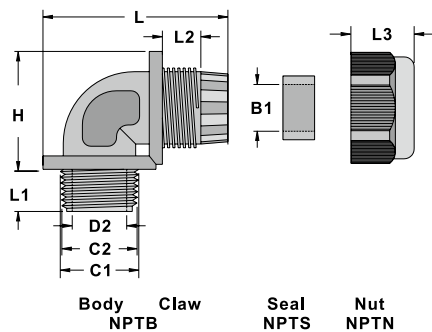

**NPT THREAD** ※ Lock nut and washer are available to be assembled upon request.


Part No.	Thread	Mounting Hole	Thread Outside Diameter		D2	B1	L1	L2	L3	L	H	Cable Range	Packing
			C1	C2									
NPTA-38	3/8"-18 NPT	16.7~17.0	16.7	16.2	12.0	10.5	11.7	9.85	16.7	48.5	30.0	5-9	20pcs
NPTA-12	1/2"-14 NPT	21.2~21.5	21.2	20.8	14.0	14.0	14.7	11.75	18.4	51.6	31.2	10-13	
NPTA-34	3/4"-14 NPT	26.3~26.6	26.3	25.6	19.2	18.4	14.8	12.55	22.3	64.5	41.6	13-16	
NPTA-114	1 1/4"-11.5 NPT	41.9~42.3	41.9	41.2	31.6	33.0	18.8	16.25	31.0	85.0	53.0	22-29	10pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- 90° design to protect cable from breakage.

## GLAND ADAPTOR

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Grey, available in other colors.
- To allow switching from PG external thread to metric internal thread.



GLANDS

Part No.	External thread D1		Internal thread D2	L	L1	W	Packing
	PG Thread	mm					
P712GY4	PG7	12.5	M12X1.5	8	10	15.0	100pcs
P716GY4	PG7	12.5	M16X1.5	8	10	20.0	
P912GY4	PG9	15.2	M12X1.5	8	9	18.8	
P916GY4	PG9	15.2	M16X1.5	8	10	20.0	
P920GY4	PG9	15.2	M20X1.5	8	10	24.0	
P1116GY4	PG11	18.3	M16X1.5	8	9	22.0	
P1120GY4	PG11	18.3	M20X1.5	8	10	24.0	
P1316GY4	PG13.5	20.4	M16X1.5	9	9	24.0	
P1320GY4	PG13.5	20.4	M20X1.5	9	10	24.0	
P1325GY4	PG13.5	20.4	M25X1.5	9	10	30.0	
P1620GY4	PG16	22.5	M20X1.5	10	10	26.8	50pcs
P1625GY4	PG16	22.5	M25X1.5	10	10	30.0	
P2125GY4	PG21	28.3	M25X1.5	11	10	32.5	
P2132GY4	PG21	28.3	M32X1.5	11	12	36.8	
P2932GY4	PG29	37.0	M32X1.5	11	10	41.6	25pcs
P2940GY4	PG29	37.0	M40X1.5	11	11	44.8	
P3640GY4	PG36	47.0	M40X1.5	11	10	55.0	
P4250GY4	PG42	54.0	M50X1.5	11	14	55.0	
P4863GY4	PG48	49.3	M63X1.5	11	14	68.0	


## REDUCTION GLAND

Unit: mm

Part No.	D1 (External thread)	D2 (Internal thread)	L	L1	W	Packing
M1216GY4	M12X1.5	M16X1.5	8.0	8.0	20.0	100pcs
M1620GY4	M16X1.5	M20X1.5	8.0	10.5	24.0	
M2025GY4	M20X1.5	M25X1.5	8.0	10.0	29.0	
M2532GY4	M25X1.5	M32X1.5	8.0	11.5	36.0	50pcs
M3240GY4	M32X1.5	M40X1.5	10.0	11.5	46.0	25pcs
M4050GY4	M40X1.5	M50X1.5	10.0	11.5	55.0	
M5063GY4	M50X1.5	M63X1.5	10.0	11.5	68.0	





- Material: UL approved Nylon 66, 94V-2
- Color: Grey, available in other colors.
- KSS ENLARGER GLANDS with small metric external thread and large metric internal thread to allow switching from small metric external thread to large metric using.

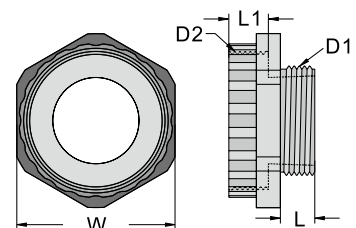

# REDUCTION GLAND

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Black and Grey, available in other colors.
- To allow switching from large metric external thread to small metric using.

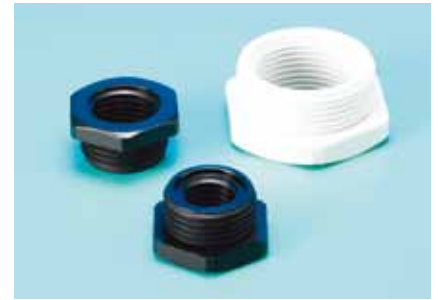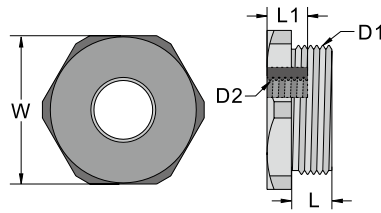

## ※Black


Part No.	D1 (External thread)	D2 (Internal thread)	L (Thread length)	L 1	W (Wacross Flats)	Packing
M2012	M20X1.5	M12X1.5	8.0	11.0	24.2	100pcs
M2016	M20X1.5	M16X1.5	8.0	12.0	24.2	
M2516	M25X1.5	M16X1.5	8.0	13.0	29.0	
M2520	M25X1.5	M20X1.5	8.0	14.0	29.0	
M3220	M32X1.5	M20X1.5	10.0	14.5	35.9	50pcs
M3225	M32X1.5	M25X1.5	10.0	15.0	35.9	
M4032	M40X1.5	M32X1.5	10.0	15.0	45.8	25pcs
M5040	M50X1.5	M40X1.5	11.5	15.0	55.0	
M6350	M63X1.5	M50X1.5	11.5	11.5	67.5	

## ※Grey

Part No.	D1 (External thread)	D2 (Internal thread)	L (Thread length)	L 1	W (Wacross Flats)	Packing
M1612GY4	M16X1.5	M12X1.5	8.0	12.0	22.0	100pcs
M2512GY4	M25X1.5	M12X1.5	8.0	13.0	28.5	
M3212GY4	M32X1.5	M12X1.5	10.0	10.0	35.5	50pcs
M3216GY4	M32X1.5	M16X1.5	10.0	14.3	35.5	
M4016GY4	M40X1.5	M16X1.5	10.0	10.0	45.5	25pcs
M4020GY4	M40X1.5	M20X1.5	10.0	10.0	45.5	
M4025GY4	M40X1.5	M25X1.5	10.0	10.0	45.5	
M5020GY4	M50X1.5	M20X1.5	12.0	12.0	54.5	
M5025GY4	M50X1.5	M25X1.5	12.0	12.0	54.5	
M5032GY4	M50X1.5	M32X1.5	12.0	12.0	54.5	
M6325GY4	M63X1.5	M25X1.5	12.0	12.0	67.5	
M6332GY4	M63X1.5	M32X1.5	12.0	12.0	67.5	
M6340GY4	M63X1.5	M40X1.5	12.0	12.0	67.5	

## NYLON CABLE GLAND STANDARD

Unit: mm

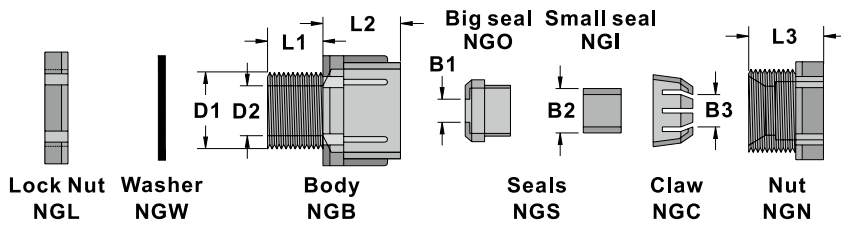


GLANDS

Part No.	Mounting Hole D1	D2	B1	B2	B3	L1	L2	L3	Cable Range	Packing
NG-16	16	11	4.8	6.5	10	12	17	16	5~10	50pcs
NG-20	20	14.1	5.1	10.5	12.5	13	19	19	6~13	
NG-25	25	18.5	8.5	9.5	14	13	22	22	10~18	25pcs
NG-32	32	25	10.8	14.5	21	15	24.5	24.5	16~22	
NG-40	40	32.4	19.5	21.5	24	20.5	26.5	27.3	20~27	10pcs
NG-50	50	42	19.5	31	33.5	23	30	31	30~41	
NG-63	64.5	56	38	44.5	49.5	25	33	32	40~53	

- Material: UL approved Nylon 66, 94V-2
- Color: Black
- Well designed for insulation, waterproof and impact resistant. Used extensively for protection and fixation of cables in control panel and apparatus.
- Application:
  1. Mount body to pre-drilled panel hole and fix it with locking nut.
  2. Insert cables through body and then seals consequently. Finally, press them together with press nut to hold cable in position.

## STRAIN RELIEF-STANDARD (WITH STRAIN RELIEF)

Unit: mm

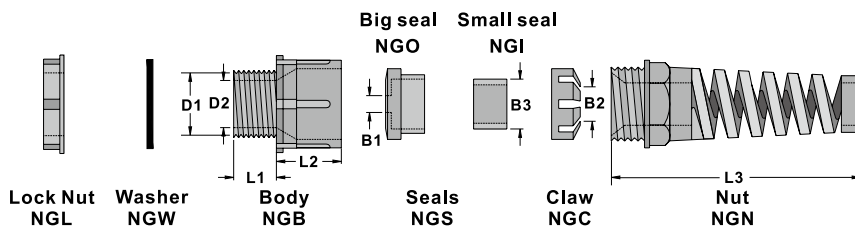

Part No.	Mounting Hole D1	Pitch	D1	B1	B2	B3	L1	L2	L3	Cable Range	Packing
NG-1610	16	1.5	11	4.8	6.5	10	12	17	62	5~10	50pcs
NG-2013	20		14.1	5	10.5	12.5	13	19	78	6~13	


- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.

# NYLON CABLE GLAND (WITH STRAIN RELIEF)

Unit: mm

Strain relief design protect cable from breakage/right angle bending

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- EG-SR series without washer.

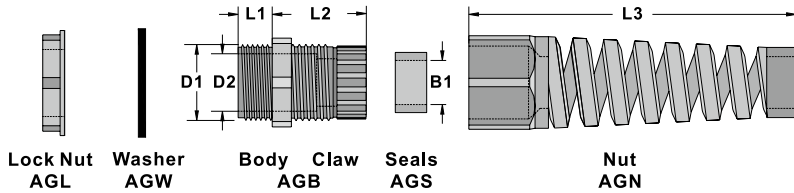


Part No.	Thread	Mounting HOLE	D1	D2	B1	L1	L2	L3	Cable Range	Packing
<b>METRIC THREAD</b>										
AG-12SR	M12xP1.25	12~12.3	12	8.3	6.9	7.9	19.6	53.3	3~6.5	50pcs
AG-16SR	M16xP1.5	16~16.3	16	10.9	10.5	15.5	23.4	74.4	5~10	
AG-20SR	M20xP1.5	20~20.3	20	15	14	15	28.5	96.2	10~14	
AG-25SR	M25xP1.5	25~25.4	25	18.6	18.4	15.2	29.4	111.2	13~18	25pcs
<b>PG THREAD (Without washer)</b>										
EG-7SR	PG-7	12.5~12.8	12.5	8.3	6.9	7.9	20	53.3	3.5~6	50pcs
EG-9SR	PG-9	15.2~15.5	15.2	10.5	8.2	7.9	22	69.5	4~8	
EG-11SR	PG-11	18.6~18.9	18.6	13.2	10.5	7.9	23.7	74.9	5~10	
EG-13.5SR	PG-13.5	20.4~20.7	20.4	15.5	12	8.9	24.6	85.5	6~12	
EG-16SR	PG-16	22.5~22.8	22.5	17.2	14	9.8	26.2	96.2	10~14	
EG-21SR	PG-21	28.3~28.7	28.3	22.4	18.4	10.8	30	111.2	13~18	25pcs
<b>JIS THREAD</b>										
AGJ-14SR	PF1/4"	14~14.3	14	8.2	6.5	8	19.6	53.3	3~6.5	50pcs
AGJ-17SR	PF3/8"	17~17.3	17	10.8	10.3	14.7	23.5	74.9	5~10	
AGJ-21SR	PF1/2"	21~21.3	21	14.9	14	12.9	28.3	96.2	10~14	
AGJ-27SR	PF3/4"	27~27.3	27	18.5	18	14.7	29.1	111.2	13~18	25pcs
<b>NPT THREAD</b>										
NPT-14SR	1/4"-18NPT	13.2~13.5	13.2	8.2	6.9	7.8	19.7	53.3	3 ~ 6.5	50pcs
NPT-38SR	3/8"-18NPT	16.7~17.0	16.7	10.8	10.5	14.6	23.8	74.9	5 ~ 10	
NPT-12SR	1/2"-14NPT	21.2~21.5	21.2	14.9	14	12.9	28.4	96.2	10 ~ 14	
NPT-34SR	3/4"-14NPT	26.3~26.6	26.3	18.5	18.4	14.5	29.2	111.2	13 ~ 18	25pcs

# BUSHING GLAND

Unit: mm

Part No.	To suite Panel hole	Length of Thread	C	to suite Cable Dia			Packing
	A	B		D	E	F	
KB1	20.5	13.0	14	6	8	10	50pcs
KB2	23.0	17.5	16.6	10	13	15	

- Material: PVC
- Color: Black
- Interior diameter of each gland available in three sizes D.E.F. Cut unnecessary part(s) optionally to fit your different cable diameters.
- To be applied for fixation and protection of cables.



## MULTI-HOLE NYLON CABLE GLAND ( 2 HOLES )

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Multi-Hole Design organizes more than one cable within a gland.



### METRIC THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AG-12-2A	M12X1.25	12~12.3	7.9	2.0~3.1	50pcs
AG-12L-2A	M12X1.5	12~12.3	7.9	2.0~3.1	
AG-16-2A	M16X1.5	16~16.3	15.5	1.6~2.6	
AG-16-2B	M16X1.5	16~16.3	15.5	2.0~3.1	
AG-16-2C	M16X1.5	16~16.3	15.5	3.0~4.1	
AG-16S-2A	M16X1.5	16~16.3	10.0	1.6~2.6	
AG-16S-2B	M16X1.5	16~16.3	10.0	2.0~3.1	
AG-16S-2C	M16X1.5	16~16.3	10.0	3.0~4.1	
AG-20-2A	M20X1.5	20~20.3	15.0	1.6~2.6	
AG-20-2B	M20X1.5	20~20.3	15.0	2.0~3.0	
AG-20-2C	M20X1.5	20~20.3	15.0	2.5~3.5	
AG-20-2D	M20X1.5	20~20.3	15.0	3.0~4.1	
AG-20-2E	M20X1.5	20~20.3	15.0	3.3~4.3	
AG-20-2F	M20X1.5	20~20.3	15.0	3.5~5.2	
AG-20-2G	M20X1.5	20~20.3	15.0	4.3~6.1	
AG-20S-2A	M20X1.5	20~20.3	10.0	1.6~2.6	
AG-20S-2B	M20X1.5	20~20.3	10.0	2.0~3.0	
AG-20S-2C	M20X1.5	20~20.3	10.0	2.5~3.5	
AG-20S-2D	M20X1.5	20~20.3	10.0	3.0~4.1	
AG-20S-2E	M20X1.5	20~20.3	10.0	3.3~4.3	
AG-20S-2F	M20X1.5	20~20.3	10.0	3.5~5.2	
AG-20S-2G	M20X1.5	20~20.3	10.0	4.3~6.1	
AG-25-2A	M25X1.5	25~25.4	15.2	2.5~3.5	
AG-25-2B	M25X1.5	25~25.4	15.2	3.3~4.3	
AG-25-2C	M25X1.5	25~25.4	15.2	3.5~5.1	
AG-25-2D	M25X1.5	25~25.4	15.2	4.3~6.1	
AG-25-2E	M25X1.5	25~25.4	15.2	5.1~6.5	
AG-25-2F	M25X1.5	25~25.4	15.2	6.4~8.7	
AG-25S-2A	M25X1.5	25~25.4	10.0	2.5~3.5	
AG-25S-2B	M25X1.5	25~25.4	10.0	3.3~4.3	
AG-25S-2C	M25X1.5	25~25.4	10.0	3.5~5.1	
AG-25S-2D	M25X1.5	25~25.4	10.0	4.3~6.1	
AG-25S-2E	M25X1.5	25~25.4	10.0	5.1~6.5	
AG-25S-2F	M25X1.5	25~25.4	10.0	6.4~8.7	
AG-32-2A	M32X1.5	32~32.4	14.7	3.6~5.2	25pcs
AG-32-2B	M32X1.5	32~32.4	14.7	5.1~6.5	
AG-32-2C	M32X1.5	32~32.4	14.7	6.4~8.7	
AG-32-2D	M32X1.5	32~32.4	14.7	7.7~10	
AG-40-2A	M40X1.5	40~40.4	18.4	7.0~9.0	10pcs
AG-40-2B	M40X1.5	40~40.4	18.4	11~13	


### PG THREAD ( DIN STANDARD )

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
EG-7-2A	PG7	12.5~12.8	7.9	2.0~3.1	50pcs
EG-7LS-2A	PG7	12.5~12.8	7.9	2.0~3.1	
EG-9-2A	PG9	15.2~15.5	8.2	2.0~3.1	
EG-9L-2A	PG9	15.2~15.5	14.7	2.0~3.1	
EG-11-2A	PG11	18.6~18.9	7.9	1.6~2.6	
EG-11-2B	PG11	18.6~18.9	7.9	2.0~3.1	
EG-11-2C	PG11	18.6~18.9	7.9	3.0~4.1	
EG-11L-2A	PG11	18.6~18.9	14.9	1.6~2.6	
EG-11L-2B	PG11	18.6~18.9	14.9	2.0~3.1	
EG-11L-2C	PG11	18.6~18.9	14.9	3.0~4.1	
EG-13-2A	PG13.5	20.4~20.7	8.9	3.5~5.2	
EG-13L-2A	PG13.5	20.4~20.7	15.8	3.5~5.2	
EG-16-2A	PG16	22.5~22.8	9.8	1.6~2.6	
EG-16-2B	PG16	22.5~22.8	9.8	2.0~3.0	
EG-16-2C	PG16	22.5~22.8	9.8	2.5~3.5	
EG-16-2D	PG16	22.5~22.8	9.8	3.0~4.1	
EG-16-2E	PG16	22.5~22.8	9.8	3.3~4.3	
EG-16-2F	PG16	22.5~22.8	9.8	3.5~5.2	
EG-16-2G	PG16	22.5~22.8	9.8	4.3~6.1	
EG-21-2A	PG21	28.3~28.7	10.8	2.5~3.5	
EG-21-2B	PG21	28.3~28.7	10.8	3.3~4.3	
EG-21-2C	PG21	28.3~28.7	10.8	3.5~5.1	
EG-21-2D	PG21	28.3~28.7	10.8	4.3~6.1	
EG-21-2E	PG21	28.3~28.7	10.8	5.1~6.5	
EG-21-2F	PG21	28.3~28.7	10.8	6.4~8.7	
EG-29-2A	PG29	37~37.4	10.8	3.6~5.2	25pcs
EG-29-2B	PG29	37~37.4	10.8	5.1~6.5	
EG-29-2C	PG29	37~37.4	10.8	6.4~8.7	
EG-29-2D	PG29	37~37.4	10.8	7.7~10	
EG-36-2A	PG36	47~47.4	14.5	7~9	10pcs
EG-36-2B	PG36	47~47.4	14.5	11~13	

\* washer are available to be assembled upon request.

# MULTI-HOLE NYLON CABLE GLAND ( 2 HOLES )

Unit: mm

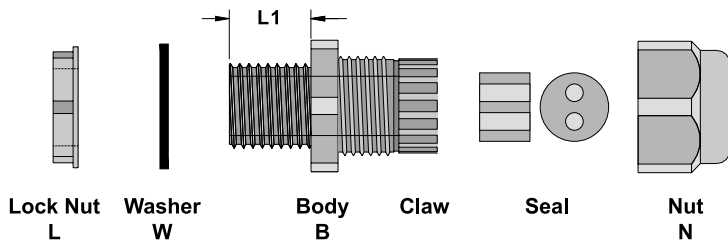

## PF THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AGJ-14-2A	PF1/4"	14~14.3	8.0	2.0~3.1	50pcs
AGJ-17-2A	PF3/8"	17~17.3	7.9	1.6~2.6	
AGJ-17-2B	PF3/8"	17~17.3	7.9	2.0~3.1	
AGJ-17-2C	PF3/8"	17~17.3	7.9	3.0~4.1	
AGJ-21-2A	PF1/2"	21~21.3	12.9	1.6~2.6	
AGJ-21-2B	PF1/2"	21~21.3	12.9	2.0~3.0	
AGJ-21-2C	PF1/2"	21~21.3	12.9	2.5~3.5	
AGJ-21-2D	PF1/2"	21~21.3	12.9	3.0~4.1	
AGJ-21-2E	PF1/2"	21~21.3	12.9	3.3~4.3	
AGJ-21-2F	PF1/2"	21~21.3	12.9	3.5~5.2	
AGJ-21-2G	PF1/2"	21~21.3	12.9	4.3~6.1	
AGJ-27-2A	PF3/4"	27~27.3	14.7	2.5~3.5	
AGJ-27-2B	PF3/4"	27~27.3	14.7	3.3~4.3	
AGJ-27-2C	PF3/4"	27~27.3	14.7	3.5~5.1	
AGJ-27-2D	PF3/4"	27~27.3	14.7	4.3~6.1	
AGJ-27-2E	PF3/4"	27~27.3	14.7	5.1~6.5	
AGJ-27-2F	PF3/4"	27~27.3	14.7	6.4~8.7	
AGJ-34-2A	PF1"	34~34.4	14.7	3.6~5.2	25pcs
AGJ-34-2B	PF1"	34~34.4	14.7	5.1~6.5	
AGJ-34-2C	PF1"	34~34.4	14.7	6.4~8.7	
AGJ-34-2D	PF1"	34~34.4	14.7	7.7~10	

## NPT THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
NPT-14-2A	1/4"-18 NPT	13.2~13.5	7.8	2.0~3.1	50pcs
NPT-38-2A	3/8"-18 NPT	16.7~17.0	14.6	1.6~2.6	
NPT-38-2B	3/8"-18 NPT	16.7~17.0	14.6	2.0~3.1	
NPT-38-2C	3/8"-18 NPT	16.7~17.0	14.6	3.0~4.1	
NPT-12-2A	1/2"-14 NPT	21.2~21.5	12.9	1.6~2.6	
NPT-12-2B	1/2"-14 NPT	21.2~21.5	12.9	2.0~3.0	
NPT-12-2C	1/2"-14 NPT	21.2~21.5	12.9	2.5~3.5	
NPT-12-2D	1/2"-14 NPT	21.2~21.5	12.9	3.0~4.1	
NPT-12-2E	1/2"-14 NPT	21.2~21.5	12.9	3.3~4.3	
NPT-12-2F	1/2"-14 NPT	21.2~21.5	12.9	3.5~5.2	
NPT-12-2G	1/2"-14 NPT	21.2~21.5	12.9	4.3~6.1	
NPT-34-2A	3/4"-14 NPT	26.3~26.6	14.5	2.5~3.5	
NPT-34-2B	3/4"-14 NPT	26.3~26.6	14.5	3.3~4.3	
NPT-34-2C	3/4"-14 NPT	26.3~26.6	14.5	3.5~5.1	
NPT-34-2D	3/4"-14 NPT	26.3~26.6	14.5	4.3~6.1	
NPT-34-2E	3/4"-14 NPT	26.3~26.6	14.5	5.1~6.5	
NPT-34-2F	3/4"-14 NPT	26.3~26.6	14.5	6.4~8.7	
NPT-1-2A	1"-11.5 NPT	33.2~33.6	14.9	3.6~5.2	25pcs
NPT-1-2B	1"-11.5 NPT	33.2~33.6	14.9	5.1~6.5	
NPT-1-2C	1"-11.5 NPT	33.2~33.6	14.9	6.4~8.7	
NPT-1-2D	1"-11.5 NPT	33.2~33.6	14.9	7.7~10	
NPT-114-2A	1 1/4"-11.5 NPT	41.9~42.3	18.2	7.0~9.0	10pcs
NPT-114-2B	1 1/4"-11.5 NPT	41.9~42.3	18.2	11~13	

※ Lock nut and washer are available to be assembled upon request.

## MULTI-HOLE NYLON CABLE GLAND ( 3 HOLES )

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Multi-Hole Design organizes more than one cable within a gland.



### METRIC THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing	
AG-12-3A	M12X1.25	12	7.9	1.6-2.6	50pcs	
AG-12L-3A	M12X1.5	12	7.9	1.6-2.6		
AG-16-3A	M16X1.5	16	15.5	1.6-2.6		
AG-16-3B	M16X1.5	16	15.5	2.0-3.0		
AG-16-3C	M16X1.5	16	15.5	3.0-4.2		
AG-16S-3A	M16X1.5	16	10	1.6-2.6		
AG-16S-3B	M16X1.5	16	10	2.0-3.0		
AG-16S-3C	M16X1.5	16	10	3.0-4.2		
AG-20-3A	M20X1.5	20	15	2.0-3.0		
AG-20-3B	M20X1.5	20	15	2.6-3.6		
AG-20-3C	M20X1.5	20	15	3.0-4.2		
AG-20-3D	M20X1.5	20	15	3.5-5.0		
AG-20-3E	M20X1.5	20	15	3.5-5.2		
AG-20S-3A	M20X1.5	20	10	2.0-3.0		
AG-20S-3B	M20X1.5	20	10	2.6-3.6		
AG-20S-3C	M20X1.5	20	10	3.0-4.2		
AG-20S-3D	M20X1.5	20	10	3.5-5.0		
AG-20S-3E	M20X1.5	20	10	3.5-5.2		
AG-25-3A	M25X1.5	25	15.2	2.6-3.6		
AG-25-3B	M25X1.5	25	15.2	3.6-5.2		
AG-25-3C	M25X1.5	25	15.2	4.8-6.2		
AG-25-3D	M25X1.5	25	15.2	6.2-8.0		
AG-25S-3A	M25X1.5	25	10	2.6-3.6		
AG-25S-3B	M25X1.5	25	10	3.6-5.2		
AG-25S-3C	M25X1.5	25	10	4.8-6.2		
AG-25S-3D	M25X1.5	25	10	6.2-8.0		
AG-32-3A	M32X1.5	32	14.7	3.6-5.2		25pcs
AG-32-3B	M32X1.5	32	14.7	4.8-6.2		
AG-32-3C	M32X1.5	32	14.7	6.2-8.0		
AG-32-3D	M32X1.5	32	14.7	7.7-10		
AG-40-3A	M40X1.5	40	18.4	6.5-8.3	10pcs	
AG-40-3B	M40X1.5	40	18.4	7.7-10		


### PG THREAD ( DIN STANDARD )

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing	
EG-7-3A	PG7	12.5	7.9	1.6-2.6	50pcs	
EG-7LS-3A	PG7	12.5	7.9	1.6-2.6		
EG-9-3A	PG9	15.2	8.2	1.6-2.6		
EG-9L-3A	PG9	15.2	14.7	1.6-2.6		
EG-11-3A	PG11	18.3	7.9	1.6-2.6		
EG-11-3B	PG11	18.3	7.9	2.0-3.0		
EG-11-3C	PG11	18.3	7.9	3.0-4.2		
EG-11L-3A	PG11	18.3	14.9	1.6-2.6		
EG-11L-3B	PG11	18.3	14.9	2.0-3.0		
EG-11L-3C	PG11	18.3	14.9	3.0-4.2		
EG-13-3A	PG13.5	20.4	8.9	3.5-5.0		
EG-13L-3A	PG13.5	20.4	15.8	3.5-5.0		
EG-16-3A	PG16	22.5	9.8	2.0-3.0		
EG-16-3B	PG16	22.5	9.8	2.6-3.6		
EG-16-3C	PG16	22.5	9.8	3.0-4.2		
EG-16-3D	PG16	22.5	9.8	3.5-5.0		
EG-16-3E	PG16	22.5	9.8	3.5-5.2		
EG-21-3A	PG21	28.3	10.8	2.6-3.6		
EG-21-3B	PG21	28.3	10.8	3.6-5.2		
EG-21-3C	PG21	28.3	10.8	4.8-6.2		
EG-21-3D	PG21	28.3	10.8	6.2-8.0		
EG-29-3A	PG29	37	10.8	3.6-5.2		25pcs
EG-29-3B	PG29	37	10.8	4.8-6.2		
EG-29-3C	PG29	37	10.8	6.2-8.0		
EG-29-3D	PG29	37	10.8	7.7-10		
EG-36-3A	PG36	47	14.5	6.5-8.3		10pcs
EG-36-3B	PG36	47	14.5	7.7-10		

※ washer are available to be assembled upon request.

# MULTI-HOLE NYLON CABLE GLAND ( 3 HOLES )

Unit: mm

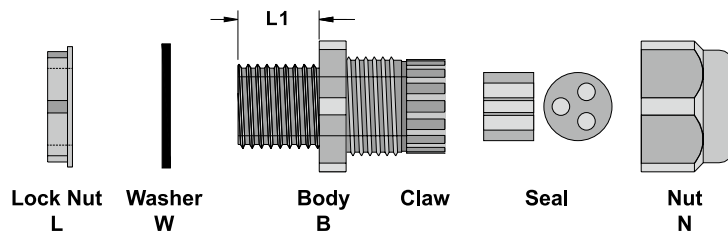

## PF THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AGJ-14-3A	PF1/4"	14	8	1.6~2.6	50pcs
AGJ-17-3A	PF3/8"	17	7.9	1.6~2.6	
AGJ-17-3B	PF3/8"	17	7.9	2.0~3.0	
AGJ-17-3C	PF3/8"	17	7.9	3.0~4.2	
AGJ-21-3A	PF1/2"	21	12.9	2.0~3.0	
AGJ-21-3B	PF1/2"	21	12.9	2.6~3.6	
AGJ-21-3C	PF1/2"	21	12.9	3.0~4.2	
AGJ-21-3D	PF1/2"	21	12.9	3.5~5.0	
AGJ-21-3E	PF1/2"	21	12.9	3.5~5.2	
AGJ-27-3A	PF3/4"	27	14.7	2.6~3.6	
AGJ-27-3B	PF3/4"	27	14.7	3.6~5.2	
AGJ-27-3C	PF3/4"	27	14.7	4.8~6.2	
AGJ-27-3D	PF3/4"	27	14.7	6.2~8.0	
AGJ-34-3A	PF1"	34	14.7	3.6~5.2	25pcs
AGJ-34-3B	PF1"	34	14.7	4.8~6.2	
AGJ-34-3C	PF1"	34	14.7	6.2~8.0	
AGJ-34-3D	PF1"	34	14.7	7.7~10	

## NPT THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
NPT-14-3A	1/4"-18 NPT	13.2	7.8	1.6~2.6	50pcs
NPT-38-3A	3/8"-18 NPT	16.7	14.6	1.6~2.6	
NPT-38-3B	3/8"-18 NPT	16.7	14.6	2.0~3.0	
NPT-38-3C	3/8"-18 NPT	16.7	14.6	3.0~4.2	
NPT-12-3A	1/2"-14 NPT	21.2	12.9	2.0~3.0	
NPT-12-3B	1/2"-14 NPT	21.2	12.9	2.6~3.6	
NPT-12-3C	1/2"-14 NPT	21.2	12.9	3.0~4.2	
NPT-12-3D	1/2"-14 NPT	21.2	12.9	3.5~5.0	
NPT-12-3E	1/2"-14 NPT	21.2	12.9	3.5~5.2	
NPT-34-3A	3/4"-14 NPT	26.3	14.5	2.6~3.6	
NPT-34-3B	3/4"-14 NPT	26.3	14.5	3.6~5.2	
NPT-34-3C	3/4"-14 NPT	26.3	14.5	4.8~6.2	
NPT-34-3D	3/4"-14 NPT	26.3	14.5	6.2~8.0	
NPT-1-3A	1"-11.5 NPT	33.2	14.9	3.6~5.2	25pcs
NPT-1-3B	1"-11.5 NPT	33.2	14.9	4.8~6.2	
NPT-1-3C	1"-11.5 NPT	33.2	14.9	6.2~8.0	
NPT-1-3D	1"-11.5 NPT	33.2	14.9	7.7~10	
NPT-114-3A	1 1/4"-11.5 NPT	41.9	18.2	6.5~8.3	10pcs
NPT-114-3B	1 1/4"-11.5 NPT	41.9	18.2	7.7~10	

※ Lock nut and washer are available to be assembled upon request.

## MULTI-HOLE NYLON CABLE GLAND ( 4 HOLES )

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Multi-Hole Design organizes more than one cable within a gland.



### METRIC THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AG-12-4A	M12X1.25	12~12.3	7.9	1.3~2.3	50pcs
AG-12L-4A	M12X1.5	12~12.3	7.9	1.3~2.3	
AG-16-4A	M16X1.5	16~16.3	15.5	1.3~2.3	
AG-16-4B	M16X1.5	16~16.3	15.5	1.4~2.4	
AG-16-4C	M16X1.5	16~16.3	15.5	2.4~3.4	
AG-16S-4A	M16X1.5	16~16.3	10	1.3~2.3	
AG-16S-4B	M16X1.5	16~16.3	10	1.4~2.4	
AG-16S-4C	M16X1.5	16~16.3	10	2.4~3.4	
AG-20-4A	M20X1.5	20~20.3	15	1.4~2.4	
AG-20-4B	M20X1.5	20~20.3	15	1.6~2.5	
AG-20-4C	M20X1.5	20~20.3	15	2.4~3.4	
AG-20-4D	M20X1.5	20~20.3	15	2.5~3.6	
AG-20-4E	M20X1.5	20~20.3	15	3.0~4.2	
AG-20-4F	M20X1.5	20~20.3	15	3.4~4.8	
AG-20S-4A	M20X1.5	20~20.3	10	1.4~2.4	
AG-20S-4B	M20X1.5	20~20.3	10	1.6~2.5	
AG-20S-4C	M20X1.5	20~20.3	10	2.4~3.4	
AG-20S-4D	M20X1.5	20~20.3	10	2.5~3.6	
AG-20S-4E	M20X1.5	20~20.3	10	3.0~4.2	
AG-20S-4F	M20X1.5	20~20.3	10	3.4~4.8	
AG-25-4A	M25X1.5	25~25.4	15.2	1.6~2.5	
AG-25-4B	M25X1.5	25~25.4	15.2	2.0~3.1	
AG-25-4C	M25X1.5	25~25.4	15.2	2.5~3.6	
AG-25-4D	M25X1.5	25~25.4	15.2	3.0~4.1	
AG-25-4E	M25X1.5	25~25.4	15.2	3.4~4.8	
AG-25-4F	M25X1.5	25~25.4	15.2	3.8~5.2	
AG-25-4G	M25X1.5	25~25.4	15.2	5.6~7.3	
AG-25S-4A	M25X1.5	25~25.4	10	1.6~2.5	
AG-25S-4B	M25X1.5	25~25.4	10	2.0~3.1	
AG-25S-4C	M25X1.5	25~25.4	10	2.5~3.6	
AG-25S-4D	M25X1.5	25~25.4	10	3.0~4.1	
AG-25S-4E	M25X1.5	25~25.4	10	3.4~4.8	
AG-25S-4F	M25X1.5	25~25.4	10	3.8~5.2	
AG-25S-4G	M25X1.5	25~25.4	10	5.6~7.3	
AG-32-4A	M32X1.5	32~32.4	14.7	2.0~3.1	
AG-32-4B	M32X1.5	32~32.4	14.7	3.0~4.1	
AG-32-4C	M32X1.5	32~32.4	14.7	3.8~5.2	
AG-32-4D	M32X1.5	32~32.4	14.7	5.6~7.3	
AG-32-4E	M32X1.5	32~32.4	14.7	7.0~9.0	
AG-40-4A	M40X1.5	40~40.4	18.4	10~12	
					10pcs


### PG THREAD ( DIN STANDARD )

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
EG-7-4A	PG7	12.5~12.8	7.9	1.3~2.3	50pcs
EG-7LS-4A	PG7	12.5~12.8	7.9	1.3~2.3	
EG-9-4A	PG9	15.2~15.5	8.2	1.3~2.3	
EG-9L-4A	PG9	15.2~15.5	14.7	1.3~2.3	
EG-11-4A	PG11	18.6~18.9	7.9	1.3~2.3	
EG-11-4B	PG11	18.6~18.9	7.9	1.4~2.4	
EG-11-4C	PG11	18.6~18.9	7.9	2.4~3.4	
EG-11L-4A	PG11	18.6~18.9	14.9	1.3~2.3	
EG-11L-4B	PG11	18.6~18.9	14.9	1.4~2.4	
EG-11L-4C	PG11	18.6~18.9	14.9	2.4~3.4	
EG-13-4A	PG13.5	20.4~20.7	8.9	3.2~4.2	
EG-13L-4A	PG13.5	20.4~20.7	15.8	3.2~4.2	
EG-16-4A	PG16	22.5~22.8	9.8	1.4~2.4	
EG-16-4B	PG16	22.5~22.8	9.8	1.6~2.5	
EG-16-4C	PG16	22.5~22.8	9.8	2.4~3.4	
EG-16-4D	PG16	22.5~22.8	9.8	2.5~3.6	
EG-16-4E	PG16	22.5~22.8	9.8	3.0~4.2	
EG-16-4F	PG16	22.5~22.8	9.8	3.4~4.8	
EG-21-4A	PG21	28.3~28.7	10.8	1.6~2.5	
EG-21-4B	PG21	28.3~28.7	10.8	2.0~3.1	
EG-21-4C	PG21	28.3~28.7	10.8	2.5~3.6	
EG-21-4D	PG21	28.3~28.7	10.8	3.0~4.1	
EG-21-4E	PG21	28.3~28.7	10.8	3.4~4.8	
EG-21-4F	PG21	28.3~28.7	10.8	3.8~5.2	
EG-21-4G	PG21	28.3~28.7	10.8	5.6~7.3	
EG-29-4A	PG29	37~37.4	10.8	2.0~3.1	
EG-29-4B	PG29	37~37.4	10.8	3.0~4.1	
EG-29-4C	PG29	37~37.4	10.8	3.8~5.2	
EG-29-4D	PG29	37~37.4	10.8	5.6~7.3	
EG-29-4E	PG29	37~37.4	10.8	7.0~9.0	
EG-36-4A	PG36	47~47.4	14.5	10~12	
					10pcs

※ washer are available to be assembled upon request.

# MULTI-HOLE NYLON CABLE GLAND ( 4 HOLES )

Unit: mm

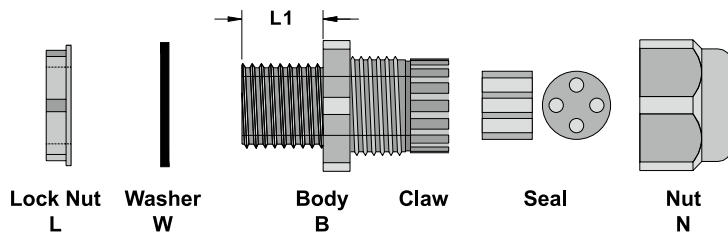

## PF THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AGJ-14-4A	PF1/4"	14~14.3	8	1.3~2.3	50pcs
AGJ-17-4A	PF3/8"	17~17.3	7.9	1.3~2.3	
AGJ-17-4B	PF3/8"	17~17.3	7.9	1.4~2.4	
AGJ-17-4C	PF3/8"	17~17.3	7.9	2.4~3.4	
AGJ-21-4A	PF1/2"	21~21.3	12.9	1.4~2.4	
AGJ-21-4B	PF1/2"	21~21.3	12.9	1.6~2.5	
AGJ-21-4C	PF1/2"	21~21.3	12.9	2.4~3.4	
AGJ-21-4D	PF1/2"	21~21.3	12.9	2.5~3.6	
AGJ-21-4E	PF1/2"	21~21.3	12.9	3.0~4.2	
AGJ-21-4F	PF1/2"	21~21.3	12.9	3.4~4.8	
AGJ-27-4A	PF3/4"	27~27.3	14.7	1.6~2.5	
AGJ-27-4B	PF3/4"	27~27.3	14.7	2.0~3.1	
AGJ-27-4C	PF3/4"	27~27.3	14.7	2.5~3.6	
AGJ-27-4D	PF3/4"	27~27.3	14.7	3.0~4.1	
AGJ-27-4E	PF3/4"	27~27.3	14.7	3.4~4.8	
AGJ-27-4F	PF3/4"	27~27.3	14.7	3.8~5.2	
AGJ-27-4G	PF3/4"	27~27.3	14.7	5.6~7.3	
AGJ-34-4A	PF1"	34~34.4	14.7	2.0~3.1	25pcs
AGJ-34-4B	PF1"	34~34.4	14.7	3.0~4.1	
AGJ-34-4C	PF1"	34~34.4	14.7	3.8~5.2	
AGJ-34-4D	PF1"	34~34.4	14.7	5.6~7.3	
AGJ-34-4E	PF1"	34~34.4	14.7	7.0~9.0	

## NPT THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
NPT-14-4A	1/4"-18 NPT	13.2~13.5	7.8	1.3~2.3	50pcs
NPT-38-4A	3/8"-18 NPT	16.7~17.0	14.6	1.3~2.3	
NPT-38-4B	3/8"-18 NPT	16.7~17.0	14.6	1.4~2.4	
NPT-38-4C	3/8"-18 NPT	16.7~17.0	14.6	2.4~3.4	
NPT-12-4A	1/2"-14 NPT	21.2~21.5	12.9	1.4~2.4	
NPT-12-4B	1/2"-14 NPT	21.2~21.5	12.9	1.6~2.5	
NPT-12-4C	1/2"-14 NPT	21.2~21.5	12.9	2.4~3.4	
NPT-12-4D	1/2"-14 NPT	21.2~21.5	12.9	2.5~3.6	
NPT-12-4E	1/2"-14 NPT	21.2~21.5	12.9	3.0~4.2	
NPT-12-4F	1/2"-14 NPT	21.2~21.5	12.9	3.4~4.8	
NPT-34-4A	3/4"-14 NPT	26.3~26.6	14.5	1.6~2.5	
NPT-34-4B	3/4"-14 NPT	26.3~26.6	14.5	2.0~3.1	
NPT-34-4C	3/4"-14 NPT	26.3~26.6	14.5	2.5~3.6	
NPT-34-4D	3/4"-14 NPT	26.3~26.6	14.5	3.0~4.1	
NPT-34-4E	3/4"-14 NPT	26.3~26.6	14.5	3.4~4.8	
NPT-34-4F	3/4"-14 NPT	26.3~26.6	14.5	3.8~5.2	
NPT-34-4G	3/4"-14 NPT	26.3~26.6	14.5	5.6~7.3	
NPT-1-4A	1"-11.5 NPT	33.2~33.6	14.9	2.0~3.1	25pcs
NPT-1-4B	1"-11.5 NPT	33.2~33.6	14.9	3.0~4.1	
NPT-1-4C	1"-11.5 NPT	33.2~33.6	14.9	3.8~5.2	
NPT-1-4D	1"-11.5 NPT	33.2~33.6	14.9	5.6~7.3	
NPT-1-4E	1"-11.5 NPT	33.2~33.6	14.9	7.0~9.0	
NPT-114-4A	1 1/4"-11.5 NPT	41.9~42.3	18.2	10~12	10pcs

※ Lock nut and washer are available to be assembled upon request.

## MULTI-HOLE NYLON CABLE GLAND ( 5 HOLES )

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Multi-Hole Design organizes more than one cable within a gland.



### METRIC THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AG-16-5A	M16X1.5	16~16.3	15.5	2.0~2.8	50pcs
AG-16S-5A	M16X1.5	16~16.3	10	2.0~2.8	
AG-20-5A	M20X1.5	20~20.3	15	1.3~2.0	
AG-20-5B	M20X1.5	20~20.3	15	2.0~2.8	
AG-20-5C	M20X1.5	20~20.3	15	2.0~3.1	
AG-20-5D	M20X1.5	20~20.3	15	3.0~4.1	
AG-20S-5A	M20X1.5	20~20.3	10	1.3~2.0	
AG-20S-5B	M20X1.5	20~20.3	10	2.0~2.8	
AG-20S-5C	M20X1.5	20~20.3	10	2.0~3.1	
AG-20S-5D	M20X1.5	20~20.3	10	3.0~4.1	
AG-25-5A	M25X1.5	25~25.4	15.2	1.3~2.0	
AG-25-5B	M25X1.5	25~25.4	15.2	2.0~3.1	
AG-25-5C	M25X1.5	25~25.4	15.2	2.6~3.6	
AG-25-5D	M25X1.5	25~25.4	15.2	3.0~4.1	
AG-25-5E	M25X1.5	25~25.4	15.2	3.6~4.6	
AG-25-5F	M25X1.5	25~25.4	15.2	4.6~6.0	
AG-25S-5A	M25X1.5	25~25.4	10	1.3~2.0	
AG-25S-5B	M25X1.5	25~25.4	10	2.0~3.1	
AG-25S-5C	M25X1.5	25~25.4	10	2.6~3.6	
AG-25S-5D	M25X1.5	25~25.4	10	3.0~4.1	
AG-25S-5E	M25X1.5	25~25.4	10	3.6~4.6	
AG-25S-5F	M25X1.5	25~25.4	10	4.6~6.0	
AG-32-5A	M32X1.5	32~32.4	14.7	2.6~3.6	25pcs
AG-32-5B	M32X1.5	32~32.4	14.7	3.6~4.6	
AG-32-5C	M32X1.5	32~32.4	14.7	4.6~6.0	
AG-32-5D	M32X1.5	32~32.4	14.7	6.0~8.0	
AG-40-5A	M40X1.5	40~40.4	18.4	6.5~8.3	10pcs


### PG THREAD ( DIN STANDARD )

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing	
EG-11-5A	PG11	18.6~18.9	7.9	2.0~2.8	50pcs	
EG-11L-5A	PG11	18.6~18.9	14.9	2.0~2.8		
EG-16-5A	PG16	22.5~22.8	9.8	1.3~2.0		
EG-16-5B	PG16	22.5~22.8	9.8	2.0~2.8		
EG-16-5C	PG16	22.5~22.8	9.8	2.0~3.1		
EG-16-5D	PG16	22.5~22.8	9.8	3.0~4.1		
EG-21-5A	PG21	28.3~28.7	10.8	1.3~2.0		
EG-21-5B	PG21	28.3~28.7	10.8	2.0~3.1		
EG-21-5C	PG21	28.3~28.7	10.8	2.6~3.6		
EG-21-5D	PG21	28.3~28.7	10.8	3.0~4.1		
EG-21-5E	PG21	28.3~28.7	10.8	3.6~4.6		
EG-21-5F	PG21	28.3~28.7	10.8	4.6~6.0		
EG-29-5A	PG29	37~37.4	10.8	2.6~3.6		25pcs
EG-29-5B	PG29	37~37.4	10.8	3.6~4.6		
EG-29-5C	PG29	37~37.4	10.8	4.6~6.0		
EG-29-5D	PG29	37~37.4	10.8	6.0~8.0		
EG-36-5A	PG36	47~47.4	14.5	6.5~8.3	10pcs	

※ washer are available to be assembled upon request.

# MULTI-HOLE NYLON CABLE GLAND ( 5 HOLES )

Unit: mm

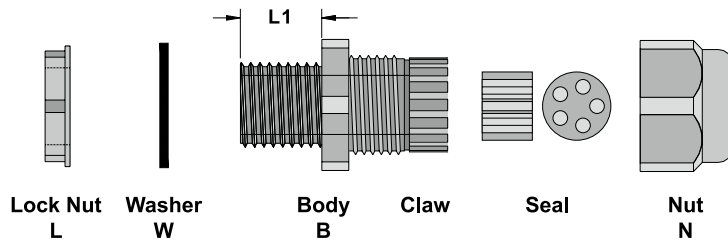

## PF THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AGJ-17-5A	PF3/8"	17~17.3	7.9	2.0~2.8	50pcs
AGJ-21-5A	PF1/2"	21~21.3	12.9	1.3~2.0	
AGJ-21-5B	PF1/2"	21~21.3	12.9	2.0~2.8	
AGJ-21-5C	PF1/2"	21~21.3	12.9	2.0~3.1	
AGJ-21-5D	PF1/2"	21~21.3	12.9	3.0~4.1	
AGJ-27-5A	PF3/4"	27~27.3	14.7	1.3~2.0	
AGJ-27-5B	PF3/4"	27~27.3	14.7	2.0~3.1	
AGJ-27-5C	PF3/4"	27~27.3	14.7	2.6~3.6	
AGJ-27-5D	PF3/4"	27~27.3	14.7	3.0~4.1	
AGJ-27-5E	PF3/4"	27~27.3	14.7	3.6~4.6	
AGJ-27-5F	PF3/4"	27~27.3	14.7	4.6~6.0	25pcs
AGJ-34-5A	PF1"	34~34.4	14.7	2.6~3.6	
AGJ-34-5B	PF1"	34~34.4	14.7	3.6~4.6	
AGJ-34-5C	PF1"	34~34.4	14.7	4.6~6.0	
AGJ-34-5D	PF1"	34~34.4	14.7	6.0~8.0	

## NPT THREAD


Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
NPT-38-5A	3/8"-18 NPT	16.7~17.0	14.6	2.0~2.8	50pcs
NPT-12-5A	1/2"-14 NPT	21.2~21.5	12.9	1.3~2.0	
NPT-12-5B	1/2"-14 NPT	21.2~21.5	12.9	2.0~2.8	
NPT-12-5C	1/2"-14 NPT	21.2~21.5	12.9	2.0~3.1	
NPT-12-5D	1/2"-14 NPT	21.2~21.5	12.9	3.0~4.1	
NPT-34-5A	3/4"-14 NPT	26.3~26.6	14.5	1.3~2.0	
NPT-34-5B	3/4"-14 NPT	26.3~26.6	14.5	2.0~3.1	
NPT-34-5C	3/4"-14 NPT	26.3~26.6	14.5	2.6~3.6	
NPT-34-5D	3/4"-14 NPT	26.3~26.6	14.5	3.0~4.1	
NPT-34-5E	3/4"-14 NPT	26.3~26.6	14.5	3.6~4.6	
NPT-34-5F	3/4"-14 NPT	26.3~26.6	14.5	4.6~6.0	25pcs
NPT-1-5A	1"-11.5 NPT	33.2~33.6	14.9	2.6~3.6	
NPT-1-5B	1"-11.5 NPT	33.2~33.6	14.9	3.6~4.6	
NPT-1-5C	1"-11.5 NPT	33.2~33.6	14.9	4.6~6.0	
NPT-1-5D	1"-11.5 NPT	33.2~33.6	14.9	6.0~8.0	
NPT-114-5A	1 1/4"-11.5 NPT	41.9~42.3	18.2	6.5~8.3	10pcs

※ Lock nut and washer are available to be assembled upon request.

## MULTI-HOLE NYLON CABLE GLAND ( 6 HOLES)

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Multi-Hole Design organizes more than one cable within a gland.

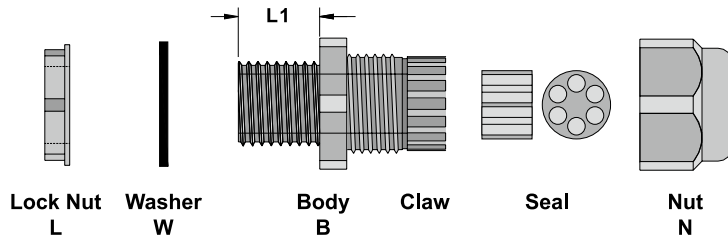

GLANDS

### METRIC THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AG-16-6A	M16X1.5	16~16.3	15.5	1.4~2.1	50pcs
AG-16S-6A	M16X1.5	16~16.3	10	1.4~2.1	
AG-20-6A	M20X1.5	20~20.3	15	1.3~2.0	
AG-20-6B	M20X1.5	20~20.3	15	2.0~3.0	
AG-20S-6A	M20X1.5	20~20.3	10	1.3~2.0	
AG-20S-6B	M20X1.5	20~20.3	10	2.0~3.0	
AG-25-6A	M25X1.5	25~25.4	15.2	1.3~2.0	
AG-25-6B	M25X1.5	25~25.4	15.2	2.0~3.0	
AG-25-6C	M25X1.5	25~25.4	15.2	2.6~3.6	
AG-25-6D	M25X1.5	25~25.4	15.2	3.6~5.2	
AG-25S-6A	M25X1.5	25~25.4	10	1.3~2.0	
AG-25S-6B	M25X1.5	25~25.4	10	2.0~3.0	
AG-25S-6C	M25X1.5	25~25.4	10	2.6~3.6	
AG-25S-6D	M25X1.5	25~25.4	10	3.6~5.2	
AG-32-6A	M32X1.5	32~32.4	14.7	2.6~3.6	25pcs
AG-32-6B	M32X1.5	32~32.4	14.7	3.6~5.2	
AG-32-6C	M32X1.5	32~32.4	14.7	5.6~7.0	

### PG THREAD (DIN STANDARD)

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing	
AGJ-17-6A	PF3/8"	17~17.3	7.9	1.4~2.1	50pcs	
AGJ-21-6A	PF1/2"	21~21.3	12.9	1.3~2.0		
AGJ-21-6B	PF1/2"	21~21.3	12.9	2.0~3.0		
AGJ-27-6A	PF3/4"	27~27.3	14.7	1.3~2.0		
AGJ-27-6B	PF3/4"	27~27.3	14.7	2.0~3.0		
AGJ-27-6C	PF3/4"	27~27.3	14.7	2.6~3.6		
AGJ-27-6D	PF3/4"	27~27.3	14.7	3.6~5.2		
AGJ-34-6A	PF1"	34~34.4	14.7	2.6~3.6		25pcs
AGJ-34-6B	PF1"	34~34.4	14.7	3.6~5.2		
AGJ-34-6C	PF1"	34~34.4	14.7	5.6~7.0		

※ washer are available to be assembled upon request.

### PF THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing	
EG-11-6A	PG11	18.6~18.9	7.9	1.4~2.1	50pcs	
EG-11L-6A	PG11	18.6~18.9	14.9	1.4~2.1		
EG-16-6A	PG16	22.5~22.8	9.8	1.3~2.0		
EG-16-6B	PG16	22.5~22.8	9.8	2.0~3.0		
EG-21-6A	PG21	28.3~28.7	10.8	1.3~2.0		
EG-21-6B	PG21	28.3~28.7	10.8	2.0~3.0		
EG-21-6C	PG21	28.3~28.7	10.8	2.6~3.6		
EG-21-6D	PG21	28.3~28.7	10.8	3.6~5.2		
EG-29-6A	PG29	37~37.4	10.8	2.6~3.6		25pcs
EG-29-6B	PG29	37~37.4	10.8	3.6~5.2		
EG-29-6C	PG29	37~37.4	10.8	5.6~7.0		

### NPT THREAD


Part No.	Thread	Mounting Hole	L1	Cable Range	Packing	
NPT-38-6A	3/8"-18 NPT	16.7~17.0	14.6	1.4~2.1	50pcs	
NPT-12-6A	1/2"-14 NPT	21.2~21.5	12.9	1.3~2.0		
NPT-12-6B	1/2"-14 NPT	21.2~21.5	12.9	2.0~3.0		
NPT-34-6A	3/4"-14 NPT	26.3~26.6	14.5	1.3~2.0		
NPT-34-6B	3/4"-14 NPT	26.3~26.6	14.5	2.0~3.0		
NPT-34-6C	3/4"-14 NPT	26.3~26.6	14.5	2.6~3.6		
NPT-34-6D	3/4"-14 NPT	26.3~26.6	14.5	3.6~5.2		
NPT-1-6A	1"-11.5 NPT	33.2~33.6	14.9	2.6~3.6		25pcs
NPT-1-6B	1"-11.5 NPT	33.2~33.6	14.9	3.6~5.2		
NPT-1-6C	1"-11.5 NPT	33.2~33.6	14.9	5.6~7.0		

※ Lock nut and washer are available to be assembled upon request.

# MULTI-HOLE NYLON CABLE GLAND ( 7 HOLES )

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Multi-Hole Design organizes more than one cable within a gland.

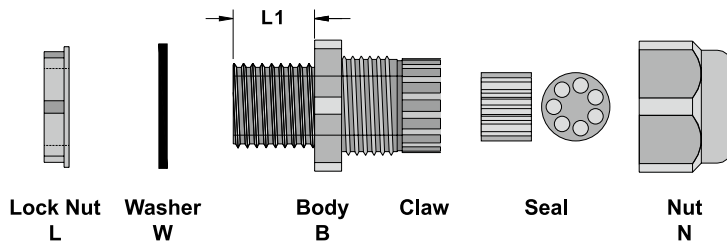

## METRIC THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AG-20-7A	M20X1.5	20~20.3	15	1.3~2.0	50pcs
AG-20-7B	M20X1.5	20~20.3	15	2.0~3.0	
AG-20S-7A	M20X1.5	20~20.3	10	1.3~2.0	
AG-20S-7B	M20X1.5	20~20.3	10	2.0~3.0	
AG-25-7A	M25X1.5	25~25.4	15.2	1.3~2.0	
AG-25-7B	M25X1.5	25~25.4	15.2	2.0~3.0	
AG-25-7C	M25X1.5	25~25.4	15.2	2.6~3.6	
AG-25S-7A	M25X1.5	25~25.4	10	1.3~2.0	
AG-25S-7B	M25X1.5	25~25.4	10	2.0~3.0	
AG-25S-7C	M25X1.5	25~25.4	10	2.6~3.6	
AG-32-7A	M32X1.5	32~32.4	14.7	2.6~3.6	25pcs
AG-32-7B	M32X1.5	32~32.4	14.7	4.6~6.0	

## PG THREAD ( DIN STANDARD )

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
AGJ-21-7A	PF1/2"	21~21.3	12.9	1.3~2.0	50pcs
AGJ-21-7B	PF1/2"	21~21.3	12.9	2.0~3.0	
AGJ-27-7A	PF3/4"	27~27.3	14.7	1.3~2.0	
AGJ-27-7B	PF3/4"	27~27.3	14.7	2.0~3.0	
AGJ-27-7C	PF3/4"	27~27.3	14.7	2.6~3.6	
AGJ-34-7A	PF1"	34~34.4	14.7	2.6~3.6	25pcs
AGJ-34-7B	PF1"	34~34.4	14.7	4.6~6.0	

※ washer are available to be assembled upon request.

## PF THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
EG-16-7A	PG16	22.5~22.8	9.8	1.3~2.0	50pcs
EG-16-7B	PG16	22.5~22.8	9.8	2.0~3.0	
EG-21-7A	PG21	28.3~28.7	10.8	1.3~2.0	
EG-21-7B	PG21	28.3~28.7	10.8	2.0~3.0	
EG-21-7C	PG21	28.3~28.7	10.8	2.6~3.6	25pcs
EG-29-7A	PG29	37~37.4	10.8	2.6~3.6	
EG-29-7B	PG29	37~37.4	10.8	4.6~6.0	

## NPT THREAD

Part No.	Thread	Mounting Hole	L1	Cable Range	Packing
NPT-12-7A	1/2"-14 NPT	21.2~21.5	12.9	1.3~2.0	50pcs
NPT-12-7B	1/2"-14 NPT	21.2~21.5	12.9	2.0~3.0	
NPT-34-7A	3/4"-14 NPT	26.3~26.6	14.5	1.3~2.0	
NPT-34-7B	3/4"-14 NPT	26.3~26.6	14.5	2.0~3.0	
NPT-34-7C	3/4"-14 NPT	26.3~26.6	14.5	2.6~3.6	25pcs
NPT-1-7A	1"-11.5 NPT	33.2~33.6	14.9	2.6~3.6	
NPT-1-7B	1"-11.5 NPT	33.2~33.6	14.9	4.6~6.0	


※ Lock nut and washer are available to be assembled upon request.

## MICRO SWITCH COVERS

Unit: mm

Part No.	Type	To suit cable dia			D	E	F	Packing
		AØ	BØ	CØ				
MSC-90	90°	7	9		49	27	19	50pcs
MSC-45	45°	7	9	11	49	27	19	


- Material: Soft PVC
- Color: Black
- Designed to protect micro switch applied on machinery. Also prevent cables from breakage.
- Available in 45° and 90° type.

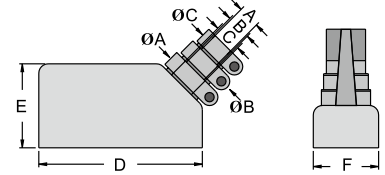

## NYLON LOCK NUT

Unit: mm

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.



### METRIC THREAD

Part No.	External thread	W mm	H mm	Packing
AGL-12	M12x1.25	17	5.2	50pcs
AGL-12L	M12x1.5	17	5.2	
AGL-16	M16x1.5	21.8	5.2	
AGL-20	M20x1.5	26.6	6.0	
AGL-25	M25x1.5	33	6.7	25pcs
AGL-32	M32x1.5	41.7	8.0	
AGL-40	M40x1.5	48.3	9.0	10pcs
AGL-50	M50x1.5	58.8	9.8	
AGL-63	M61x1.5	66	10.8	
AGL-63L	M63x1.5	73	11.0	

### PF THREAD

Part No.	External thread	W mm	H mm	Packing
AGL-20F	PF 1/2"	26.2	6.6	50pcs
AGJL-14	PF 1/4"	17.0	5.1	50pcs
AGJL-17	PF 3/8"	22.0	5.2	
AGJL-21	PF 1/2"	27.0	6.1	
AGJL-58	PF 5/8"	26.8	6.0	
AGJL-27	PF 3/4"	33.0	7.1	25pcs
AGJL-34	PF 1"	41.6	8.1	
AGJL-112	PF 1 1/2"	58.5	9.8	10pcs
AGJL-2	PF 2"	72.3	10.8	

### PG THREAD (DIN STANDARD)

Part No.	External thread	W mm	H mm	Packing
EGL-7	PG7	19.1	5.1	50pcs
EGL-7LS	PG7	15.6	5.1	
EGL-9	PG9	21	5.1	
EGL-11	PG11	24	5.1	
EGL-13.5	PG13.5	27	6.1	
EGL-16	PG16	30	6.1	
EGL-21	PG21	36	7.1	25pcs
EGL-29	PG29	46.2	8.0	
EGL-36	PG36	58.3	7.8	10pcs
EGL-42	PG42	65	7.8	
EGL-48	PG48	69.5	7.8	50pcs
EGHL-11	PG11	23.9	5.2	


### NPT THREAD

Part No.	External thread	W mm	H mm	Packing
NPTL-14	NPT 1/4"	17	5.1	50pcs
NPTL-38	NPT 3/8"	22	5.2	
NPTL-12	NPT 1/2"	27	6.1	
NPTL-34	NPT 3/4"	33	7.1	
NPTL-1	NPT 1"	42.2	8.1	25pcs
NPTL-114	NPT 1 1/4"	48.8	9.0	10pcs

# NYLON CABLE GLAND SEALING PLUG

Unit: mm

Part No.	D	D1	H	Suitable for cable gland	Packing
BPA-060	10.2	6	15.5	AG-12, EG-7, AGJ-14, NPT-14	50pcs
BPA-095	15.6	9.5	15.5	AG-16, EG-11, AGJ-17, NPT-38	
BPA-135	19.6	13.5	16.5	AG-20, EG-16, AGJ-21, NPT-12	
BPA-175	24.4	17.5	17	AG-25, EG-21, AGJ-27, NPT-34	
BPA-245	32.5	24.5	17.2	AG-32, EG-29, AGJ-34, NPT-1	25pcs
BPA-315	41.5	31.5	17.6	AG-40, NPT-114	10pcs
BPA-389	47.2	38.9	17.6	AG-50, EG-36	
BPA-435	52.5	43.5	18.6	AG-63	




- Material: UL approved Nylon 66, 94V-2
- Color: Black
- Insert into the cable gland before any assembly to avoid dust and water

# WASHERS

Unit: mm

- Material: PVC
- Color: Black
- Function: To be used with cable gland to get effect of non-slip, seamless and water-resistant.



Part No.	I.D. D1	O.D. D	Packing
AGW-12	10.5	17	50pcs
AGW-16	16	24	
AGW-20	20	28	
AGW-25	25	35	
AGW-32	32	44	25pcs
AGW-40	40	52	10pcs
AGW-50	50	65	
AGW-63	58.5	69.5	
AGW-63L	62	81.4	
AGJW-14	13	18	50pcs
AGJW-17	16	24	
AGJW-21	20	28	
AGJW-27	25	35	
AGJW-34	32	44	25pcs
AGJW-112	50	65	10pcs
AGJW-2	58.5	69.5	
AGW-20F	20	28	50pcs

Part No.	I.D. D1	O.D. D	Packing
EGW-7	10.5	17	50pcs
EGW-9	15	22	
EGW-11	18	26	
EGW-13.5	20	28	
EGW-16	22.5	29.5	
EGW-21	28	35.5	
EGW-29	37	45	
EGW-36	47	54	
EGW-42	54	65	10pcs
EGW-48	58.5	69.5	
NPTW-14	13	18	50pcs
NPTW-38	16	24	
NPTW-12	20	28	
NPTW-34	25	35	
NPTW-1	32	44	25pcs
NPTW-114	40	52	10pcs

## MULTI-HOLE SEAL

Unit: mm

- Material: TPE
- Function: To be used with cable gland and gather various cables into it.



Part No.	Cable Range	O.D. D	H	Cable Gland Suitable	Packing
MH9-2A	2.0~3.1	9.0	7.3	AG-12、 EG-7、 AGJ-14、 NPT-14	50pcs
MH9-3A	1.6~2.6				
MH9-4A	1.3~2.3				
MH11-2A	2.0~3.1	11.0	8.0	EG-9	
MH11-3A	1.6~2.6				
MH11-4A	1.3~2.3	14.0	9.2	AG-16、 EG-11、 AGJ-17、 NPT-38	
MH14-2A	1.6~2.6				
MH14-2B	2.0~3.1				
MH14-2C	3.0~4.1				
MH14-3A	1.6~2.6				
MH14-3B	2.0~3.0				
MH14-3C	3.0~4.2				
MH14-4A	1.3~2.3				
MH14-4B	1.4~2.4				
MH14-4C	2.4~3.4				
MH14-5A	2.0~2.8				
MH16-2A	3.5~5.2				
MH16-3A	3.5~5.0				
MH16-4A	3.2~4.0				
MH18-2A	1.6~2.6	17.5	9.0	AG-20、 EG-16、 AGJ-21、 NPT-12	
MH18-2B	2.0~3.0				
MH18-2C	2.5~3.5				
MH18-2D	3.0~4.1				
MH18-2E	3.3~4.3				
MH18-2F	3.5~5.2				
MH18-2G	4.3~6.1				
MH18-3A	2.0~3.0				
MH18-3B	2.6~3.6				
MH18-3C	3.0~4.2				
MH18-3D	3.5~5.0				
MH18-3E	3.5~5.2				
MH18-4A	1.4~2.4				
MH18-4B	1.6~2.5				
MH18-4C	2.4~3.4				
MH18-4D	2.5~3.6				
MH18-4E	3.0~4.2				
MH18-4F	3.4~4.8				

Part No.	Cable Range	O.D. D	H	Cable Gland Suitable	Packing
MH18-5A	1.3~2.0	17.5	9.0	AG-20、 EG-16、 AGJ-21、 NPT-12	50pcs
MH18-5B	2.0~2.8				
MH18-5C	2.0~3.1				
MH18-5D	3.0~4.1				
MH18-6A	1.3~2.0				
MH18-6B	2.0~3.0				
MH18-7A	1.3~2.0				
MH18-7B	2.0~3.0	22.8	11.2	AG-25、 EG-21、 AGJ-27、 NPT-34	
MH23-2A	2.5~3.5				
MH23-2B	3.3~4.3				
MH23-2C	3.5~5.1				
MH23-2D	4.3~6.1				
MH23-2E	5.1~6.5				
MH23-2F	6.4~8.7				
MH23-3A	2.6~3.6				
MH23-3B	3.6~5.2				
MH23-3C	4.8~6.2				
MH23-3D	6.2~8.0				
MH23-4A	1.6~2.5				
MH23-4B	2.0~3.1				
MH23-4C	2.5~3.6				
MH23-4D	3.0~4.1				
MH23-4E	3.4~4.8				
MH23-4F	3.8~5.2				
MH23-4G	5.6~7.3				
MH23-5A	1.3~2.0				
MH23-5B	2.0~3.1				
MH23-5C	2.6~3.6				
MH23-5D	3.0~4.1				
MH23-5E	3.6~4.6				
MH23-5F	4.6~6.0				
MH23-6A	1.3~2.0				
MH23-6B	2.0~3.0				
MH23-6C	2.6~3.6				
MH23-6D	3.6~5.2				
MH23-7A	1.3~2.0				
MH23-7B	2.0~3.0				
MH23-7C	2.6~3.6				

# MULTI-HOLE SEAL

Unit: mm




Part No.	Cable Range	O.D. D	H	Cable Gland Suitable	Packing
MH30-2A	3.6~5.2	30.4	14.4	AG-32、 EG-29、 AGJ-34、 NPT-1	25pcs
MH30-2B	5.1~6.5				
MH30-2C	6.4~8.7				
MH30-2D	7.7~10				
MH30-3A	3.6~5.2				
MH30-3B	4.8~6.2				
MH30-3C	6.2~8.0				
MH30-3D	7.7~10				
MH30-4A	2.0~3.1				
MH30-4B	3.0~4.1				
MH30-4C	3.8~5.2				
MH30-4D	5.6~7.3				
MH30-4E	7.0~9.0				
MH30-5A	2.6~3.6				
MH30-5B	3.6~4.6				
MH30-5C	4.6~6.0				
MH30-5D	6.0~8.0				

Part No.	Cable Range	O.D. D	H	Cable Gland Suitable	Packing
MH30-6A	2.6~3.6	30.4	14.4	AG-32、 EG-29、 AGJ-34、 NPT-1	25pcs
MH30-6B	3.6~5.2				
MH30-6C	5.6~7.0				
MH30-7A	2.6~3.6	39.0	8.3	AG-40、 NPT-114	10pcs
MH30-7B	4.6~6.0				
MH39-2A	7.0~9.0				
MH39-2B	11~13				
MH39-3A	6.5~8.3				
MH39-3B	7.7~10	41.8	8.3	EG-36	
MH39-4A	10~12				
MH39-5A	6.5~8.3				
MH42-2A	7.0~9.0				
MH42-2B	11~13				
MH42-3A	6.5~8.3				
MH42-3B	7.7~10				
MH42-4A	10~12				
MH42-5A	6.5~8.3				

## FLEXIBLE CONDUIT ADAPTOR

Unit: mm

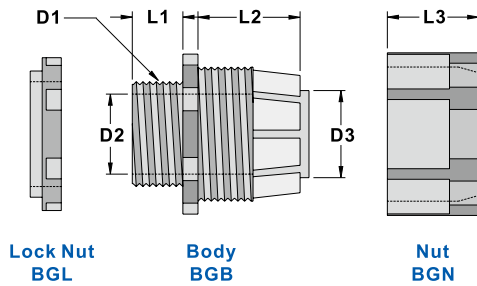

Part No.	D1	D2	D3	L1	L2	L3	Conduit Suitable	Packing
BG-10	14.4	6.3	7.5	9.7	18.5	15.9	BG-10P	50pcs
BG-14	18.0	11.0	10.5	10.0	17.9	15.7	BG-14P	
BG-16	18.0	11.0	10.8	10.0	17.9	15.7	BG-16P	
BG-18	16.0	11.1	13.3	9.7	18.6	15.9	BG-18P (3/8" )	
BG-20	21.0	15.0	14.7	10.0	17.7	16.0	BG-20P	
BG-22	20.0	15.4	17.2	9.8	17.6	16.3	BG-22P (1/2" )	
BG-25	25.0	18.9	18.9	11.4	23.6	20.6	BG-25P	
BG-26	25.0	18.9	19.8	11.4	23.6	20.6	BG-26P (3/4" )	25pcs
BG-32	33.0	26.0	24.3	12.0	22.8	20.6	BG-32P	
BG-34	32.0	26.8	28.6	11.3	23.3	20.7	BG-34P (1" )	
BG-40	40.0	31.5	31.6	11.3	23.6	20.7	BG-40P	
BG-42	40.0	32.7	34.8	11.5	23.3	20.8	BG-42P (1 1/4" )	10pcs
BG-48	46.0	37.5	40.5	12.6	22.3	20.7	BG-48P	
BG-50	46.0	37.5	39.5	12.6	21.6	20.7	BG-50P	

- Material: UL approved NYLON 66, 94V-2 (Grey)
- Constructed of three parts to fix flexible conduit in control panel, machinery and apparatus.
- Application
  1. Mount body to pre-drilled panel hole.
  2. Insert conduit through nut.
  3. Insert conduit to claw and fix it with nut to complete works.
- ※ Available in LDPE material upon request.

## FLEXIBLE CONDUIT ADAPTOR

Unit: mm

Part No.	TYPE	Conduit Suitable	Packing
FAM-18	Conduit to conduit connector	BG-18P (3/8" )	20pcs
FAM-22		BG-22P (1/2" )	
FAM-26		BG-26P (3/4" )	
FAM-34		BG-34P (1" )	
FAB-18	Conduit to junction box connector	BG-18P (3/8" )	
FAB-22		BG-22P (1/2" )	
FAB-26		BG-26P (3/4" )	
FAB-34		BG-34P (1" )	
FAP-18	Conduit to pvc pipe connector	BG-18P (3/8" )	
FAP-22		BG-22P (1/2" )	
FAP-26		BG-26P (3/4" )	
FAP-34		BG-34P (1" )	



- Material: UL approved ABS, 94HB
- Color: Grey

# EASY TYPE FLEXIBLE CONDUIT ADAPTOR

Unit: mm

Part No.		Mounting Hole	Conduit Suitable	Packing
Grey	Black			
BGQ-16	BGQ-16BK	16	BG-16P	50pcs (with screw nut)
BGQ-18	BGQ-18BK	17	BG-18P	
BGQ-20	BGQ-20BK	20	BG-20P	
BGQ-22	BGQ-22BK	20.6	BG-22P	
BGQ-25	BGQ-25BK	25	BG-25P	
BGQ-26	BGQ-26BK	24	BG-26P	
BGQ-32	BGQ-32BK	32	BG-32P	25pcs (with screw nut)
BGQ-34	BGQ-34BK	32.5	BG-34P	



## PATENTED INSTALL INSTRUCTION



**STEP 1**  
Insert the  
conduit into  
the adaptor.

**STEP 2**  
Push lock  
out.

**STEP 3**  
Turn it  
around for  
locking.

- Material: UL approved Nylon 66, 94V-2
- Color: Black / Grey
- Feature : One piece design, easy and faster installation without tool.

# LIGHT DUTY CONDUIT


● Close design

Unit: mm

Part No.	Inner dia	Outside dia	C	Packing
	AØ (mm)	BØ (mm)		
BG-10P	7.4±0.4	10.2±0.4	2.64	300M
BG-14P	10.7±0.4	14.1±0.4	2.04	
BG-16P	10.7±0.4	16.0±0.4	3.30	
BG-18P	13.8±0.4	17.5±0.4	3.10	
BG-20P	14.1±0.4	20.0±0.4	3.70	
BG-22P	17.2±0.4	22.0±0.4	3.10	
BG-25P	18.3±0.4	25.0±0.4	4.10	100M
BG-26P	21.2±0.4	25.8±0.4	3.10	
BG-32P	24.3±0.4	32.0±0.4	3.61	
BG-34P	28.7±0.4	34.0±0.4	3.10	
BG-40P	31.2±0.4	40.0±0.4	4.12	
BG-42P	34.9±0.4	42.0±0.4	3.10	
BG-48P	40.0±0.5	48.0±0.5	2.85	50M
BG-50P	39.6±0.5	50.0±0.5	4.85	
BG-55P	47.5±0.4	54.5±0.5	2.00	
※ BG-60P	52.0±0.5	60.0±0.5	5.80	30M
※ BG-76P	62.0±0.5	76.0±0.5	5.80	



- Material: PE (EVA available)
- For running cable protection in Electrical/Machinery/Building Harness wiring.
- Flexible body facilitate your corner/ elbow wiring.

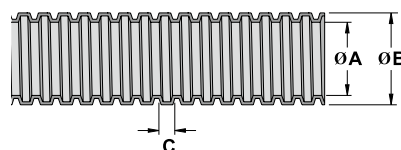

※ Please Call if required as it is under developing now.

## EASY TYPE FLEXIBLE CONDUIT ADAPTOR

### PG THREAD

Unit: mm

Part No.	External thread	Mounting Hole	Conduit Suitable	Packing
PAQ-0707	PG-7	12.5	PA-07	50pcs (with screw nut)
PAQ-0709	PG-9	15.2	PA-07	
PAQ-1009	PG-9	15.2	PA-10	
PAQ-1209	PG-9	15.2	PA-12	
PAQ-1211	PG-11	18.6	PA-12	
PAQ-12135	PG-13.5	20.4	PA-12	
PAQ-1216	PG-16	22.5	PA-12	
PAQ-17135	PG-13.5	20.4	PA-17	
PAQ-1716	PG-16	22.5	PA-17	
PAQ-1721	PG-21	28.3	PA-17	
PAQ-2321	PG-21	28.3	PA-23	25pcs (with screw nut)
PAQ-2929	PG-29	37	PA-29	
PAQ-3636	PG-36	47	PA-36	10pcs (with screw nut)
PAQ-4848	PG-48	59.3	PA-48	



### PATENTED INSTALL INSTRUCTION



**STEP 1**  
Insert the conduit into the adaptor.

**STEP 2**  
Push lock out.

**STEP 3**  
Turn it around for locking.


- Material: UL approved Nylon 66, 94V-2
- Color: Black
- Feature : One piece design, easy and faster installation without tool.

GLANDS

## NYLON FLEXIBLE CONDUIT

Unit: mm

Part No.		Inch	Inner dia	Outside dia	C	Packing
Close Design	Split Design		AØ (mm)	BØ (mm)		
PA-07	PAO-07	1/4"	6.0±0.25	9.8±0.35	2.6±0.3	50M
PA-10	PAO-10	5/16"	9.0±0.25	13.0±0.35	2.2±0.3	
PA-12	PAO-12	3/8"	11.4±0.35	15.5±0.35	2.3±0.3	
PA-17	PAO-17	1/2"	16.3±0.35	21.6±0.45	2.6±0.4	
PA-23	PAO-23	3/4"	22.4±0.45	28.2±0.45	2.4±0.4	
PA-29	PAO-29	1"	27.9±0.45	34.0±0.45	2.7±0.4	
PA-36	PAO-36	1 1/4"	35.8±0.45	42.4±0.6	2.3±0.3	25M
PA-48	PAO-48	2"	47.5±0.6	54.5±0.6	2.3±0.3	

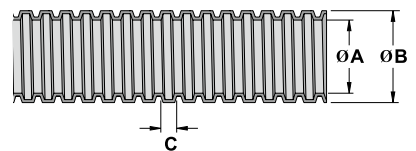


- Material: UL approved Nylon 6 , 94HB
- Color: Black
- For running cable protection in Electrical/Machinery/Building Harness wiring.
- Flexible body facilitate your corner/elbow wiring.

# SPLIT FLEXIBLE CONDUITS

Unit: mm

Part No.		Inner dia	Outside dia	C	Packing
Split design	Close design	AØ (mm)	BØ (mm)		
CR-05P	CRS-05P	5.6±0.4	7.9±0.4	2.6	300M
CR-07P	CRS-07P	7.4±0.4	10.2±0.4	2.6	
CR-11SP	CRS-11SP	10.7±0.4	14.0±0.4	1.7	
CR-11P	CRS-11P	10.7±0.4	16.0±0.4	3.3	200M
CR-13P	CRS-13P	13.8±0.4	17.5±0.4	3.1	
CR-15P	CRS-15P	15.0±0.4	19.5±0.4	3.5	100M
CR-17P	CRS-17P	17.2±0.4	22.0±0.4	3.1	
CR-19P	CRS-19P	19.3±0.4	23.8±0.4	3.5	
CR-22P	CRS-22P	21.2±0.4	25.8±0.4	3.1	50M
CR-24P	CRS-24P	24.3±0.4	32.0±0.4	3.61	
CR-25P	CRS-25P	25.0±0.4	30.0±0.4	4.1	
CR-28P	CRS-28P	28.0±0.4	34.0±0.4	3.1	
CR-32P	CRS-32P	31.2±0.4	40.0±0.4	4.12	
CR-35P	CRS-35P	34.9±0.4	42.0±0.4	3.1	
CR-40P	CRS-40P	39.6±0.5	50.0±0.5	4.85	
CR-48P	CRS-48P	47.5±0.5	54.5±0.5	2.0	

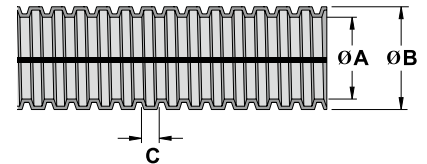


- Material: PP (BLACK)
- All sizes in mm unless otherwise stated.
- D or OD can vary ± 0.4 mm
- Manufactured from P.P. (Black)
- Cut to requested length available Please contact our office with your requirements.

# HEAVY DUTY CONVEY FLEXIBLE CONDUIT

Unit: mm

• Close design

Part No.	Inner dia	Outside dia	C	Packing
	AØ (mm)	BØ (mm)		
CF-14P	10.7±0.4	14.1±0.4	2.04	100M
CF-18P	13.8±0.4	17.5±0.4	3.2	
CF-22P	17.2±0.4	22.0±0.4	3.2	
CF-26P	21.2±0.4	25.8±0.4	3.2	
CF-34P	28.7±0.4	34.0±0.4	3.2	
CF-42P	34.9±0.4	42.0±0.4	3.2	50M

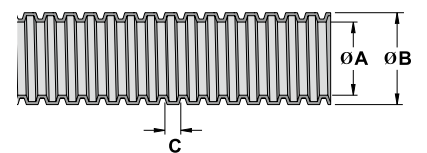

- Material: HDPE
- Color: Black
- Used to protect wiring inside the wall to replace normal PVC pipe. Flexible design for better wire running.


## FLEXIBLE METAL CONDUIT ADAPTOR

Unit: mm

Part No.	Mounting Hole	Conduit Suitable	Packing
MG-18	20.6	MCR04 3/8"	50pcs/bag
MG-22	20.6	MCR05 1/2"	
MG-26	25	MCR06 3/4"	
MG-32	32.6	MCR08 1"	
MG-41	41.5	MCR10 1 1/4"	25pcs/bag



- Material: ABS
- Color: Grey
- Conduit adaptor designed for metal conduit.

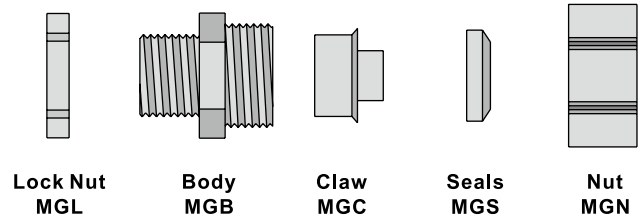


GLANDS

## METAL FLEXIBLE CONDUIT

Unit: mm

Part No.	Inner dia		Outside dia	Packing
	(Inch)	(mm)	(mm)	
MCR-02	1/4"	8.0	11.3	100M
MCR-03	5/16"	10	13.6	
MCR-04	3/8"	12.6	16.2	
MCR-05	1/2"	16	20	50M
MCR-06	3/4"	21	24.4	
MCR-08	1"	26.3	30.6	
MCR-10	1 1/4"	35	40.6	30M
MCR-12	1 1/2"	40.3	46	25M
MCR-16	2"	51.6	58.4	20M
MCR-20	2 1/2"	64.5	71.6	
MCR-24	3"	78.3	86.4	
MCR-32	4"	99.6	113.3	



- Material : metal with PVC tube.
- Waterproof, high tensile strength. Good resistance in bending, erosion.


# FLEXIBLE METAL CONDUIT ADAPTOR

Unit: mm

- Material: Zinc Alloy
- Feature: Waterproof, Corrosion resistance, Heat resistance.
- To Apply, putting NUT and SEAL on the end of metal flexible conduit, then screw CLAW of the metal adaptor into metal flexible conduit till tight.


## Control box adaptor

Part No.	Thread specification		suitable for metal flexible conduit	Packing
	Pitch	mounting hole		
NBG-02	M16X1.5	15.5	MCR-02 (1/4")	50pcs
NBG-03	M16X1.5	15.5	MCR-03 (5/16")	
NBG-04	PT1/2"	20.9	MCR-04 (3/8")	
NBG-05	PT1/2"	20.9	MCR-05 (1/2")	
NBG-06	PT3/4"	26.4	MCR-06 (3/4")	
NBG-08	PT1"	33.2	MCR-08 (1")	
NBG-10	PT1 1/4"	41.9	MCR-10 (1 1/4")	20pcs
NBG-12	PT1 1/2"	47.8	MCR-12 (1 1/2")	10pcs
NBG-16	PT2"	59.6	MCR-16 (2")	5pcs
NBG-20	PT2 1/2"	75.1	MCR-20 (2 1/2")	1pcs
NBG-24	PT3"	87.8	MCR-24 (3")	
NBG-32	PT4"	113.0	MCR-32 (4")	




## Inner thread type adaptor

Part No.	Thread specification		suitable for metal flexible conduit	Packing
	Pitch	mounting hole		
FBG-04	PS1/2"	18.8	MCR-04 (3/8")	50pcs
FBG-05	PS1/2"	18.8	MCR-05 (1/2")	
FBG-06	PS3/4"	25.0	MCR-06 (3/4")	
FBG-08	PS1"	30.9	MCR-08 (1")	30pcs
FBG-10	PS1 1/4"	39.9	MCR-10 (1 1/4")	20pcs
FBG-12	PS1 1/2"	45.5	MCR-12 (1 1/2")	10pcs
FBG-16	PS2"	57.2	MCR-16 (2")	5pcs
FBG-20	PS2 1/2"	73.0	MCR-20 (2 1/2")	1pcs
FBG-24	PS3"	85.9	MCR-24 (3")	
FBG-32	PS4"	110.9	MCR-32 (4")	

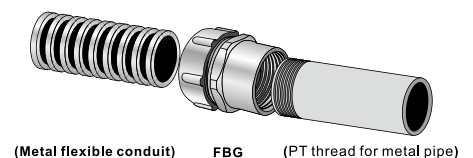

## L type adaptor for control box


Part No.	Thread specification		suitable for metal flexible conduit	Packing
	Pitch	mounting hole		
RBG-04	PT1/2"	20.9	MCR-04 (3/8")	50pcs
RBG-05	PT1/2"	20.9	MCR-05 (1/2")	
RBG-06	PT3/4"	26.4	MCR-06 (3/4")	
RBG-08	PT1"	33.2	MCR-08 (1")	30pcs
RBG-10	PT1 1/4"	41.9	MCR-10 (1 1/4")	20pcs
RBG-12	PT1 1/2"	47.8	MCR-12 (1 1/2")	10pcs
RBG-16	PT2"	59.6	MCR-16 (2")	5pcs
RBG-20	PT2 1/2"	75.1	MCR-20 (2 1/2")	1pcs
RBG-24	PT3"	87.8	MCR-24 (3")	
RBG-32	PT4"	113.0	MCR-32 (4")	



## FLEXIBLE METAL CONDUIT ADAPTOR

Unit: mm

- Material: Zinc Alloy
- Feature: Waterproof, Corrosion resistance, Heat resistance.
- To Apply, putting NUT and SEAL on the end of metal flexible conduit, then screw CLAW of the metal adaptor into metal flexible conduit till tight.




(Metal flexible conduit) EBG (EMT pipe)

### EMT pipe adaptor

Part No.	EMT Pipe	mounting hole	suitable for metal flexible conduit	Packing
EBG-04	E19(1/2")	19.5	MCR-04 (3/8")	50pcs
EBG-05	E19(1/2")	19.5	MCR-05 (1/2")	
EBG-06	E25(3/4")	26.1	MCR-06 (3/4")	
EBG-08	E31(1")	32.2	MCR-08 (1")	30pcs
EBG-10	E39(1 1/4")	38.7	MCR-10 (1 1/4")	20pcs
EBG-12	E51(1 1/2")	51.7	MCR-12 (1 1/2")	10pcs
EBG-16	E63(2")	63.9	MCR-16 (2")	5pcs
EBG-20	E75(2 1/2")	76.8	MCR-20 (2 1/2")	1pcs
EBG-24	E82(3")	89.5	MCR-24 (3")	
EBG-32	E104(4")	115.7	MCR-32 (4")	

### PVC pipe adaptor

Part No.	PVC Pipe	mounting hole	suitable for metal flexible conduit	Packing
PBG-05	#16(1/2")	22.3	MCR-05 (1/2")	50pcs
PBG-06	#20(3/4")	27.7	MCR-06 (3/4")	
PBG-08	#28(1")	34.3	MCR-08 (1")	30pcs
PBG-10	#35(1 1/4")	43.8	MCR-10 (1 1/4")	20pcs
PBG-12	#41(1 1/2")	51.7	MCR-12 (1 1/2")	10pcs
PBG-16	#52(2")	63.9	MCR-16 (2")	5pcs
PBG-20	#65(2 1/2")	76.8	MCR-20 (2 1/2")	1pcs
PBG-24	#80(3")	89.5	MCR-24 (3")	
PBG-32	#100(4")	115.7	MCR-32 (4")	



(Metal flexible conduit) PBG (PVC pipe)

## METAL FLEXIBLE CONDUIT END CAP

Unit: mm

Part No.	suitable for metal flexible conduit	Packing
NBGC-02	MCR-02 (1/4")	50pcs
NBGC-03	MCR-03 (5/16")	
NBGC-04	MCR-04 (3/8")	
NBGC-05	MCR-05 (1/2")	
NBGC-06	MCR-06 (3/4")	
NBGC-08	MCR-08 (1")	30pcs
NBGC-10	MCR-10 (1 1/4")	20pcs
NBGC-12	MCR-12 (1 1/2")	10pcs
NBGC-16	MCR-16 (2")	5pcs
NBGC-20	MCR-20 (2 1/2")	1pcs
NBGC-24	MCR-24 (3")	
NBGC-32	MCR-32 (4")	





## MOVABLE BUSHING



Unit: mm

Part No.	T	Max. chassis Thickness	Packing	Material
MB-008	0.8	Under 0.8	10M/bag	PE
MB-010	1.0	1.0		
MB-012	1.2	1.0-1.2		
MB-016	1.6	1.0-1.6		
MB-020	2.0	1.6-2.0		
MB-024	2.4	2.0-2.4		
MB-032	3.2	2.4-3.2		
MB-045	4.5	3.2-4.5		
MBH-008	0.8	under 0.8	100M/RL	PE
MBH-010	1.0	1.0		
MBH-012	1.2	1.0-1.2		
MBH-016	1.6	1.0-1.6		
MBH-020	2.0	1.6-2.0		
MBH-024	2.4	2.0-2.4		
MBH-032	3.2	2.4-3.2		
MBH-045	4.5	3.2-4.5		



### STRAIGHT CUTTING

MBC-012	1.2	1.0-1.2	10M	PE
MBC-016	1.6	1.0-1.6		
MBC-020	2.0	1.6-2.0		
MBC-024	2.4	2.0-2.4		
MBC-032	3.2	2.4-3.2		
MBC-045	4.5	3.2-4.5		






Part No.	T	Max. chassis Thickness	Packing	Material
MB-010N	1.0	under 1.0	25 cm/per pcs 100 pcs/bag	Nylon
MB-014N	1.4	1.0-1.4		
MB-016N	1.6	1.0-1.6		
MB-020N	2.0	1.6-2.0		
MB-024N	2.4	2.0-2.4		
MB-032N	3.2	2.4-3.2		
MB-045N	4.5	3.2-4.5		

- Material: PE, NYLON (NATURAL color). Nylon product has more flexibility and better adhesion.
- Usage: Cut to fit any hole sizes for cords, wires, cables protection against damage from sharp panel edges.
- Function: Wires and cables protection and insulation.
- Advantage:
  1. Flexible, high adhesion, smooth surface.
  2. Packed via paper spool for easy storage, and could be used for longer distance.

# EDGING GROMMET

Unit: mm


Part No.	A mm	B mm	C mm	Max. chassis Thickness	Packing
ED-010	0.5	1.0	3.3	under 1.0	10M/bag
ED-012	0.6	1.2	3.4	1.0~1.2	
ED-016	0.9	1.6	4.6	1.2~1.6	
ED-020	1.1	2.0	4.5	1.6~2.0	
ED-024	1.2	2.4	5.07	2.0~2.4	
ED-032	1.5	3.2	5.8	2.4~3.2	
ED-055	4.5	5.5	7.9	4.5~5.5	

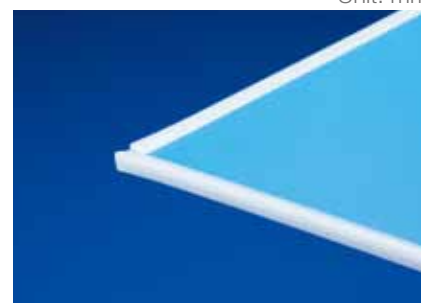


- Material: PE Natural
- Cut length optionally to fit your chassis edging protection or other application for smoothing edges.
- Protect wires, cables and chassis insulation.

# STRAIN RELIEF BUSHING

Unit: mm



CORD ASSEMBLY



Part No.	Cross Section Shape	Wire Accommodate		Mounting Hole		Part Length D	Max Chassis Thickness F	Packing
		UL Wire	Size	A	B			
SR-F21	Flat	SPT-1 #18	2.3X4.5 / 2.8X5.3	9.5	8.7	10.3	0.5-1.6	100 pcs
SR-F23		SPT-1 #18	2.3X4.5 / 2.8X5.3	9.5	8.7	10.3	1.8-3.2	
SR-F31		SPT-1 #18	3.0X5.6	11.2	9.9	10.3	1.0-1.6	
SR-F32		SPT-1 #18	3.0X5.6	11.0	9.9	10.3	1.9-2.5	
SR-F41		SPT-2 #18	3.0X7.1 / 3.8X7.6	12.7	11.8	10.3	0.5-1.6	
SR-F42		SPT-2 #18	3.0X7.1 / 3.8X7.6	12.7	11.8	10.3	1.8-2.5	
SR-F51		SPT-3 #18	5X10.4	14.3	12.9	15.2	0.5-1.6	
SR-F53		SPT-3 #18	5X10.4	14.3	12.9	15.2	1.8-3.5	
SR-F83			6X15.2	21.6	21.3	20.4	2.0-3.4	
SR-5R1	Round	SVI,SVT 3C #18	Ø6.2~Ø7.4	12.8	11.5	11.0	0.5-1.6	
SR-5R2		SVI,SVT 3C #18	Ø6.2~Ø7.4	13.0	11.5	11.0	1.8-2.5	
SR-6W2		SJT 3C #18	Ø7.6	12.8	11.8	11.0	1.8-2.3	
SR-6P1		SJT 3C #18	Ø7.4~Ø8.2	15.9	14.0	14.8	0.5-1.6	
SR-6P3		SJT 3C #18	Ø7.4~Ø8.2	15.9	14.0	14.8	1.9-3.2	
SR-6R1		SJ,SJT,3C #16	Ø8.2~Ø9.2	15.9	14.0	14.8	0.5-1.6	
SR-6R3		SJ,SJT,3C #16	Ø8.2~Ø9.2	15.9	14.0	14.8	1.9-3.2	
SR-7R1		SJT,3C #14	Ø9.2~Ø10.5 / Ø11	19.9	17.0	19.0	0.5-1.6	
SR-7R3		SJT,3C #14	Ø9.2~Ø10.5 / Ø11	19.7	17.0	19.0	1.9-3.2	
SR-8R3		SJT,3C #12	Ø12~Ø15.2	21.6	21.3	20.6	1.9-3.2	
SR-9R1		# 18 20-30pcs	Ø11~Ø15	15.0	19.0	17.5	0.5-1.6	
SR-9R7	SJT,3C # 10	Ø15.2~Ø16.3 / Ø17.5	28.0/30.2	25.5	25.2	1.0-3.2		

- Material: UL approved Nylon 66, 94V-2
- Color: Black
- Cuts assembly cost, prolongs cords life. Used extensively for protecting cords of computer, apparatus...etc.

## STRAIN RELIEF BUSHINGS ASSEMBLY TOOL

Unit: mm

Part No: KT-1 (Stainless)

Applicable:	SB-F21	SB-F23	SB-F31	SB-F32
Bushings	SB-F41	SB-F42	SB-F51	SB-F53
	SB-5R1	SB-5R2	SB-6W2	SB-6P1
	SB-6P3	SB-6R1	SB-6R3	SB-7R1
	SB-7R3	SB-8R3	SB-9R7	




## SQUARE STRAIN RELIEF BUSHING

Unit: mm

Part No.	Wires Accomodate		Mounting Hole		Part Length D	Max. Chassis Thickness F	Packing
	UL	Size	A	B			
SR-S41	SPT-1	3.0X5.6	16	11.5	16.5	1.0~1.2	100pcs
	SPT-2	3.8X7.6					

- Material: UL approved Nylon 66, 94V-2
- Cuts assembly cost, prolongs cords life. Used extensively for protecting cords of computer, apparatus...etc.

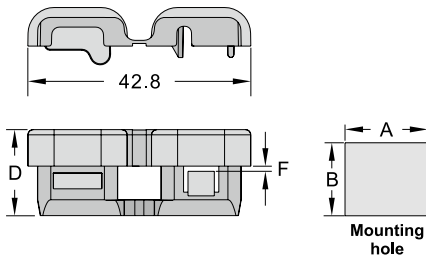


## FLEXIBLE RIGHT ANGLE STRAIN RELIEF BUSHING


Unit: mm

Part No.	Cross Section Shape	Wires Accomodate		Mounting Hole		Part Length D	Max. Chassis Thickness F	Packing
		UL	Size	A	B			
SB-F42LF	Flat	SPT-2	3.3x6.6/3.6x7.2	12.7x13.2/13.2x13.7	10.9	20.5	1.5~2.0	100pcs

- Material: UL approved Nylon 66,94V-2
- Color: Black
- Protect power cable from computer, house appliance or electronic/electrical equipment when power cable run out from bottom of equipment.
- Strain relief design protect power cord from breakage.
- Assemble according to photoes sequence above.

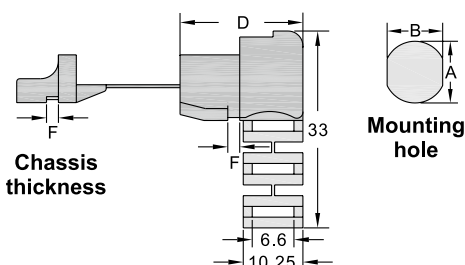

CORD ASSEMBLY

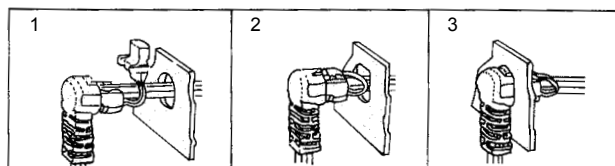


# FLEXIBLE STRAIN RELIEF BUSHING

Unit: mm

Part No.	Cross Section Shape	Wires Accommodate		Mounting Hole		Part Length D	Max. Chassis Thickness F	Packing
		UL	Size	A	B			
SB-F52F	Flat	SPT-2	4.6x8.0	14.3	13.2	36.0	0.8~2.3	100pcs

- Material: UL approved Nylon 66,94V-2
- Color: Black

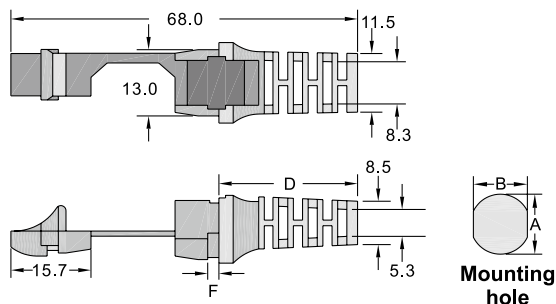


# RIGHT ANGLE STRAIN RELIEF BUSHING


Unit: mm

Part No.	Cross Section Shape	Wires Accommodate		Mounting Hole		Part Length D	Max. Chassis Thickness F	Packing
		UL	Size	A	B			
SB-F42L	Flat	SPT-1	3 X 5.6	12.7	11.8	17.7	1.8~2.6	100pcs
		SPT-2	3.8 X 7.1					

- Material: UL approved Nylon 66, 94V-2
- Color: Black
- Protect power cable from chassis.
- L type design facilitate power cord runs out.
- Assemble according photos as below.

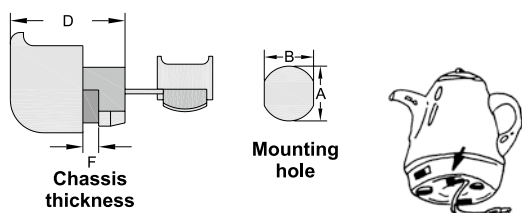



CORD ASSEMBLY

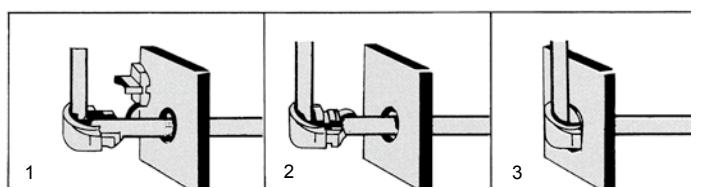

## SNAP BUSHING

Unit: mm

Part No.	Mounting Hole	B mm	C mm	L mm	T mm	Packing
	mm					
SB-7S	7.1	5.8	8.8	6.1	1.3	100pcs
SB-8S	7.9	6.8	9.8	6	1.5	
SB-12S	11.9	9.2	13.7	6.3	1.5	
SB-22S	22.2	19.6	24	6.5	1.5	
SB-8	7.9	5.8	10.5	8	1.6	100pcs
SB-8A	7.9	5.1	10.3	8	1.6	
SBP-8	7.4	5.9	10.8	15	2	
SB-10	9.5	6.4	12	10.3	1.6	
SB-10M	9.5	7.8	13	10.5	1.6	
SB-13	12.7	8	15	10.3	1.6	
SB-14	14.3	11.4	17	10.3	1.5	
SB-16	15.9	12.7	18.6	10.3	1.6	
SB-19	19.1	14.3	21.7	10.3	1.6	
SB-19M	19.1	15.8	21.7	10.3	1.6	
SB-20	20.0	15.9	22.4	10	1.4	
SB-22	22.2	17.5	24.2	11.5	1.6	
SB-22M	22.2	18.9	24.2	11.5	1.6	
SB-25	25.4	19.5	28.5	11.7	1.8	
SB-26	25.4	19.1	28.5	11.5	1.6	
SB-30	30.1	24.1	33.3	11.5	1.6	
SB-32	32.0	23.8	34.6	11.4	1.5	
SB-38	38.1	29	42.1	11.4	1.5	
SB-45	44.5	35.4	47.8	11.6	1.5	
SB-50	50.8	41.6	54.6	11.8	1.6	

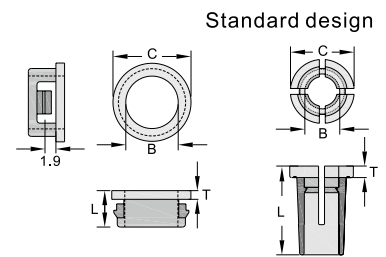

SB-7S,8S,12S,22S


SBP-8

- Material: UL approved Nylon 66 , 94V-2
- Color: Black
- KSS SNAP BUSHING smooth and insulate your raw-edged holes in metal chassis.
- Locking into hole firmly with fingertip pressure.
- Protect electrical cables, ropes, utility lines through metal holes.
- Available in application for chassis thickness under 3.2mm
- ※ SB-8A : available for chassis thickness under 2.2 mm
- ※ SB-8 : available for chassis thickness under 1.6 mm

# SNAP BUSHING

Unit: mm

Part No.	Mounting Hole		B mm	C mm	L mm	Packing
	mm	inch				
RSB-16	15.9	5/8"	12.7	20.5	10.3	100pcs
RSB-19	19.1	3/4"	14.8	24	10	
RSB-21	20.6	13/16"	15.2	24.3	10	
RSB-22	22.2	7/8"	17	25.4	11.5	
RSB-25	25.4	1"	20.4	28.5	11.5	
RSB-28	27.6	1 3/32"	23	31.2	11.5	
RSB-35	34.9	1 3/8"	29.5	38.5	11.7	
RSB-38	38.1	1 1/2"	31	41	11	

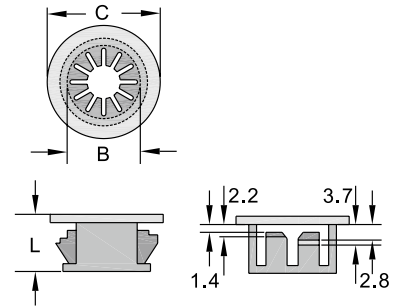


- Material: UL approved Nylon 66, 94V-2.
- Color: Black
- Universal design to hold various cable range with a fix size.


# SNAP BUSHING 【open/closed】

Unit: mm

Part No.	Mounting Hole		B mm	C mm	L mm	Packing
	mm	inch				
OSB-9S	9.5	3/8"	6.5	11.3	6.1	100pcs
OSB-12S	12.7	1/2"	9.6	15.8	7.3	
OSB-10	9.5	3/8"	6	11.8	9.8	
OSB-13	12.7	1/2"	7.5	15.1	10.3	
OSB-16	15.9	5/8"	11.2	18.5	10.3	
OSB-19	19.1	3/4"	12.5	21	10.3	
OSB-22	22.2	7/8"	17	24.6	10.3	
OSB-26	25.4	1"	20	28	10.6	



Standard design




OSB-9S,12S

- Material: UL approved Nylon 66,94V-2
- Color: Black
- Protect power cord and smooth chasis hole.
- Under 3.2mm chassis.
- Finger-tip pressure to install. No tool is needed.
- Can be applied after power cable installed.

## HOLE PLUG

Unit: mm

Part No.	Mounting Hole	B/mm	C/mm	Packing
	mm			
HP-5	5	6.3	5.9	100pcs
HP-6	6	7.8	7.8	
HP-8	7.9	10.3	8.1	
HP-10	9.5	13	10.5	
HP-13S	12.7	14.5	10.1	
HP-13	12.7	16.5	10.9	
HP-15	14.3	16.7	10.3	
HP-16	15.9	19.5	10	
HP-19	19.1	22.9	10	
HP-22	22.2	25.8	11.3	
HP-23	23.4	27	11.4	
HP-25	25.4	29	11.6	
HP-30	30.1	34.2	12	
HP-35	34.9	38.1	14.3	
HP-38	38.1	42.1	11.2	
HP-45	44.5	49.7	11.8	



BUSHINGS


- Material: UL approved Nylon 66, 94V-2
- Color: Black
- HOLE PLUG close your unneeded holes with fingertip pressure at low cost and assure good appearance.
- Available in application for chassis thickness Under 3.2mm

## SCREW PLUG

Unit: mm

### METRIC THREAD

Part No.	External Thread	A	B	C	D	Packing
MSP-12	M12×1.5	11.7	15.0	10.0	6.0	100pcs
MSP-16	M16×1.5	15.7	20.0	10.5	6.0	
MSP-20	M20×1.5	19.9	24.0	10.5	6.0	
MSP-25	M25×1.5	24.7	29.7	12.8	7.8	
MSP-32	M32×1.5	31.7	36.6	13.3	7.8	50pcs
MSP-40	M40×1.5	39.9	45.8	13.4	7.8	
MSP-50	M50×1.5	49.4	55.5	16.2	9.8	10pcs
MSP-63	M63×1.5	62.4	69.3	17.5	11.8	

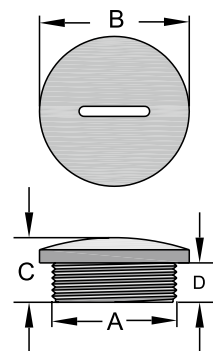


- Material : UL approved Nylon66, 94V-2
- Color : Black (Grey available)

# SCREW PLUG

## PG THREAD

Unit: mm

Part No.	External Thread	A mm	B mm	C mm	D mm	Packing
PSP-7	PG-7	12.2	14.8	10	6	100pcs
PSP-9	PG-9	15.1	18.7	10.4	6	
PSP-11	PG-11	18.5	21.7	10.4	6	
PSP-13.5	PG-13.5	20.3	23.7	10.3	6	
PSP-16	PG-16	22.3	27	10.3	6	
PSP-21	PG-21	28.2	32.8	12.8	7.8	50pcs
PSP-29	PG-29	37	44.1	13.3	7.8	
PSP-36	PG-36	47	52.6	13.7	7.7	10pcs
PSP-42	PG-42	54	59.5	16.3	9.6	
PSP-48	PG-48	59.6	64.2	18	11.8	



- Material : UL approved Nylon66, 94V-2
- Color : Black (Grey available)


# EASY FIT GROMMET 【open/closed】

Unit: mm

Part No.		A mm	B mm	C mm	D mm	E mm	F mm	Packing
Open	Close							
GE-2015	GEC-2015	23.9	19.6	15.5	2.1	2.0	3.9	100pcs
GEQ-2015	GECQ-2015	23.9	19.6	15.5	2.1	2.0	3.9	
GEQ-2621	GECQ-2621	30.0	26.0	20.8	2.4	2.4	3.8	




- Material : PVC
- Color: Black
- ※ Available with soft type upon requested

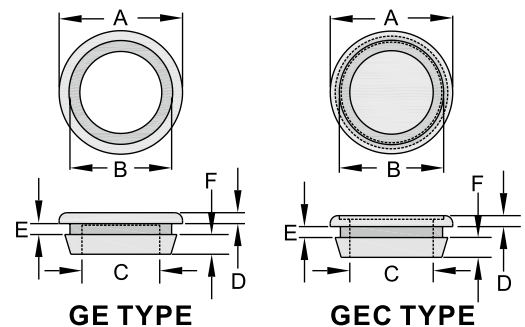


## GROMMET 【open/closed】

Unit: mm


Part No.		A	B	C	D	E	Packing
Open	Close						
GM-0603	GMC-0603	8.5	6	3	4.7	1.7	100pcs
GM-0705	GMC-0705	10.2	7.2	5	4.7	1.7	
GM-1006	GMC-1006	13.3	10	6.4	6.5	1.7	
GM-1108S	GMC-1108S	15.5	10.9	7.8	7.8	2.3	
GM-1108	GMC-1108	15.5	11	7.8	9	3	
GM-1410	GMC-1410	19.5	13.9	10.5	6.4	3.4	
GM-2015	GMC-2015	23.7	20.1	15.5	6.1	1.7	
GM-2518	GMC-2518	29.9	25.1	18.9	7.2	1.5	
GM-3225	GMC-3225	38.1	31.7	25	7.8	1.5	
GMQ-0603	GMCQ-0603	8.5	6	3	4.7	1.7	100pcs
GMQ-0705	GMCQ-0705	10.2	7.2	5	4.7	1.7	
GMQ-1006	GMCQ-1006	13.3	10	6.4	6.5	1.7	
GMQ-1108S	GMCQ-1108S	15.5	10.9	7.8	7.8	2.3	
GMQ-1108	GMCQ-1108	15.5	11	7.8	9	3	
GMQ-1410	GMCQ-1410	19.5	13.9	10.5	6.4	3.4	
GMQ-2015	GMCQ-2015	23.7	20.1	15.5	6.1	1.7	
GMQ-2518	GMCQ-2518	29.9	25.1	18.9	7.2	1.5	
GMQ-3225	GMCQ-3225	38.1	31.7	25	7.8	1.5	



GM TYPE



GMC TYPE



GM-1108

● Material : PVC

● Color: Black

※ Available with soft type upon requested, please add "Q" to item no. as GMQ-0603 / GMCQ-0603


## SQUARE HEAD GROMMET NUT

Unit: mm

Part No.	A	B	C	D	Packing
SGN-07	9.6	7.2	3.0	8.9	100pcs

● Material :UL approved Nylon 66, 94V-2

● Color : Natural




# HOUSING COVER

Unit: mm

Part No.	A	B	C	D	E	Packing	SUITABLE SOCKET
HR-9M	20.0	11.0	9.2	7.2	6.1	100pcs	9 pin male
HR-9F	18.1	9.2	7.85	6.5	5.7		9 pin female
HR-15M	28.2	10.9	9.1	7.0	6.0		15 pin male
HR-15F	26.5	9.5	7.5	6.9	5.9		15 pin female
HR-25M	42.0	10.9	9.1	7.3	6.3		25 pin male
HR-25F	40.6	9.5	7.8	6.8	5.9		25 pin femal
HR-37F	57.5	10.9	8.3	7.5	6.5		37 pin female



- Material : PE
- Color : Natural
- To protect pin connector from dirty.

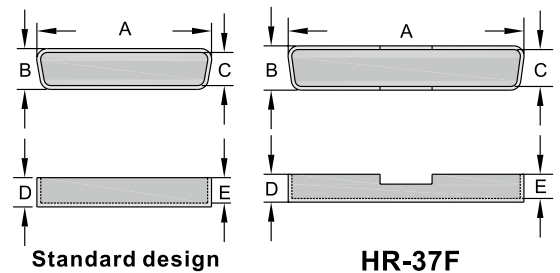


# HOUSING COVER

Unit: mm

Part No.		A	B	C	D	Packing
PE	NYLON 66					
RHR-6PE	RHR-6	8.2	8.8	7.3	6.1	100pcs
RHR-7PE	RHR-7	8.0	3.0	2.5	6.6	
RHR-8PE	RHR-8	10.4	8.0	6.9	8.3	



- Material : PE or NYLON 66.
- Color : Natural
- To protect pin connector from dirty.

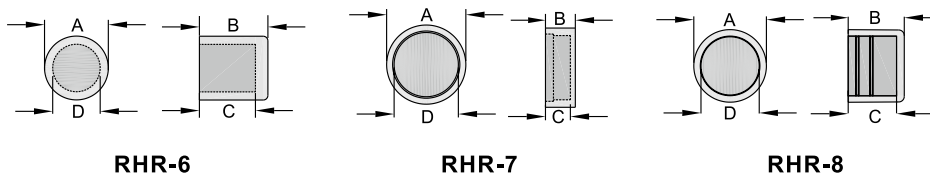


# HOUSING COVER

Unit: mm

Part No.	Type	Dimensoin	Packing
USB-1	USB Type A	AS Figure	100pcs
USB-3	USB Type C	AS Figure	



- Material : PE
- Color : Natural
- To protect pin connector from dirty.

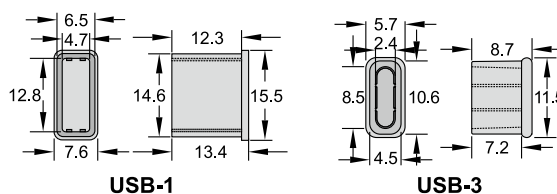


## USB HOUSING COVER

Unit: mm

Part No.	Dimension	Packing
USB-2	As Figure	100pcs

- Material: PE
- Color : Black
- Function: Dust cover for USB plug.




## FUSE COVER

Unit: mm

Part No.	Dimension	Packing
FR-1	As Figure	100pcs

- Material : Transparent PVC
- To protect fuse from dirty.





## PLUG COVER

Unit: mm

Part No.	Dimension	Design	Packing
PR-2	AS Figure	Standard	100pcs
PR-3		Ground	

- Material: PE
- Color : Black
- To protect plug from dirty

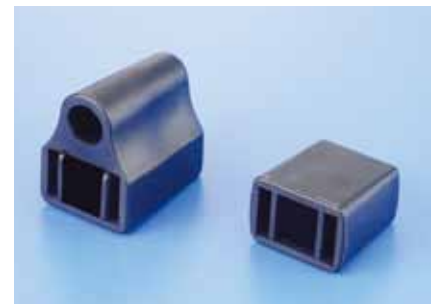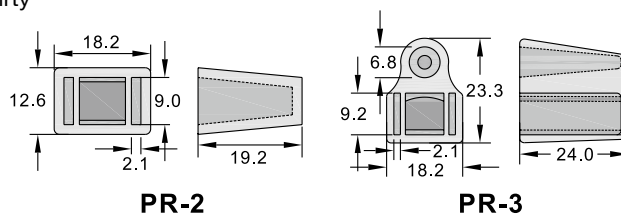


## SCREW PLUG

Unit: mm

Part No.	Dimension	Packing
HPA-16	As Figure	100pcs

- Material : PP
- Color : Natural
- For automotive hydraulic pump plugs into the hole.

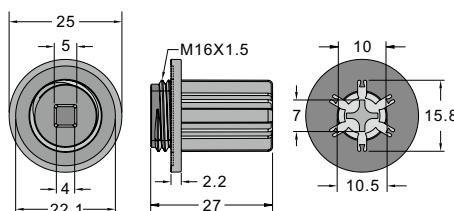

**BANDEX** Cable Accessories


# WIRE CONNECTORS



## CLOSED END CONNECTORS

Unit: mm

- Material: UL approved Nylon 66,94V-2 / 94V-0
- Nylon insulated close-end wire connector
- To apply,insert pre-stripped wires into connector tube and crimp it with crimping tool to hold wires firmly even in vibration.



### 94V-2

Part No.	L1	L2	Ø1	Ø2	Nominal Sectional	AWG	Suitable Wires	Packing
					Area mm <sup>2</sup>		Strang mm <sup>2</sup> d	
CE-1	7.0	20.0	2.4	7.8	1.25	22-16	0.5-1.75	100pcs
CE-2	7.5	20.0	3.0	7.8	2.0	16-14	1.0-3.0	
CE-5	8.5	25.3	3.8	10.5	5.5	12-10	2.5-6.0	
CE-8	8.5	27.8	4.7	12.0	8.0	8.0	4.0-9.0	

### 94V-0

Part No.	L1	L2	Ø1	Ø2	Nominal Sectional	AWG	Suitable Wires	Packing
					Area mm <sup>2</sup>		Strang mm <sup>2</sup> d	
CE-1V0	7.0	20.0	2.4	7.8	1.25	22-16	0.5-1.75	100pcs
CE-2V0	7.5	20.0	3.0	7.8	2.0	16-14	1.0-3.0	
CE-5V0	8.5	25.3	3.8	10.5	5.5	12-10	2.5-6.0	
CE-8V0	8.5	27.8	4.7	12.0	8.0	8.0	4.0-9.0	

AWG	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
mm <sup>2</sup>	33.4	20.8	13.2	8.4	5.3	3.3	2.1	1.3	0.83	0.52	0.33	0.21	0.13	0.08	0.05	0.03

## WIRE NUT DRIVE

Unit: mm

Part No.	Packing
SWT-1	1pcs

- Material : Nylon 66
- Color : Black
- Socket tool used with electrical screwdriver, make fast and easy installation for screw on wire connector.




# ALL PLASTIC WITH WIRE SPRING



Unit: mm

Part No.	B	C	E	Wire Combination		Color	Packing
				sq	AWG		
SW-71BH	6.5	8.6	15.2	Max. 2#1.25 Min. 2#0.5	Max. 2#16 Min. 2#18	Grey	100pcs
SW-72BH	7.1	9.9	17.7	Max. 3#1.25 Min. 2#0.5	Max. 3#16 Min. 2#18	Blue	
SW-73BH	9.7	12.7	22	Max. 2#2.0 Min. 3#1.25	Max. 4#14 Min. 3#16	Orange	
SW-74BH	11.0	14.0	24.6	Max. 3#3.5 Min. 2#2.0	Max. 3#12 Min. 3#14	Yellow	
SW-76BH	13.1	16.3	26.5	Max. 2#5.5 Min. 2#3.5	Max. 5#10 Min. 2#12	Red	




- Material: Tough thermoplastic, UL 94V-2 flame-retardant shell.
- Strip wires before application.
- Rated at 600 volt max. for building wiring.
- Temp. 105°C (221°F)
- Spring design provided more secure connection.

# HEAVY DUTY CONNECTORS



Unit: mm

Part No.	B	C	E	Wire Combination		Color	Packing
				sq	AWG		
SW-Y11H	9.8	18.2	25.8	Max. 3#3.5 Min. 2#0.5	Max. 3#12 Min. 2#18	Yellow	100pcs
SW-Y12H	13.0	23.0	31.8	Max. 5#3.5 Min. 3#1.25	Max. 5#12 Min. 3#16	Red	
SW-Y13H	14.9	25.5	33.3	Max. 3#5.5 Min. 3#3.5	Max. 3#10 Min. 3#12	Grey	
SW-Y14H	17.8	31.8	40.0	Max. 3#8 Min. 2#5.5	Max. 2#8 Min. 2#10	Blue	



- Material: Tough thermoplastic, UL 94V-2 flame-retardant shell.
- Two wing makes move easy twist on termination of wires.
- Strip wires before application.
- Rated at 600 volt max. for building wiring.
- Temp. 105°C (221°F)
- Spring design provided more secure connection.

## MID-WAY WIRE CONNECTOR

Unit: mm

Part No.		Wire Suitable	Color	Packing
PP	NYLON			
KW-1	KW-1N	18AWG-14AWG	Blue	100pcs
KW-2	KW-2N	18AWG-14AWG	Blue	
KW-3	KW-3N	22AWG-18AWG	Red	
KW-4	KW-4N	18AWG-14AWG	Blue	
KW-5	KW-5N	12AWG-10AWG	Yellow	
KW-6	KW-6N	22AWG-20AWG	Red	
KW-6L	KW-6LN	18AWG-14AWG	Red	
	KW-10N	22AWG-18AWG	Red	
	KW-11N	16AWG-14AWG	Blue	
	KW-12N	12AWG-10AWG	Yellow	



- Material: PP or NYLON
- Insert wires to be connected on the grooves of connector, clamps down the plastic body and electricity can be conducted.

**BANDEX** Cable Accessories



# INSULATING



## VINYL WIRE END CAPS

Unit: mm

Part No.	Sq	Dimension		Color	Packing
		D1	D2		
V-1.25	1.25	3.3	3.1	Red、Blue、 White、Black、 Yellow、Green Brown、Grey	100pcs
V-2	2.0	4.5	3.7		
V-3.5	3.5	5.1	4.0		
V-5.5	5.5	5.7	4.9		
V-8	8	6.8	6.2		
V-14	14	8.8	8.0		
V-22	22	11.6	9.8		
V-38	38	14.5	13.0		
V-60	60	16.4	14.0		
V-80	80	18.2	15.8		
V-100	100	21.6	18.2		
V-125	125	23.6	20.3		50pcs
V-150	150	25.3	22.3		
V-200	200	31.4	24.4		
V-250	250	32.8	27.0		
V-325	325	35.3	29.5		
V-400	400	45.1	37.3	25pcs	
V-500	500	48.0	40.2		
V-630	630	53.8	44.6		




INSULATING

- Material: Soft PVC
- Suitable for all kinds of switchboard and complicated machinery to tell different colors. Soft and flexible material can be used for different shapes of end terminals, easy to tighten and take off.
- Feature 1: Smooth and bright surface
- Feature 2: Stable thickness
- Feature 3: Consistant length
- Feature 4: Even opening ends
- Feature 5: Tidy the wiring works
- Standard color: Red, white, blue, yellow, black, Green. (brown grey available upon request)

## VINYL TUBE

Unit: mm

- Material: Soft PVC

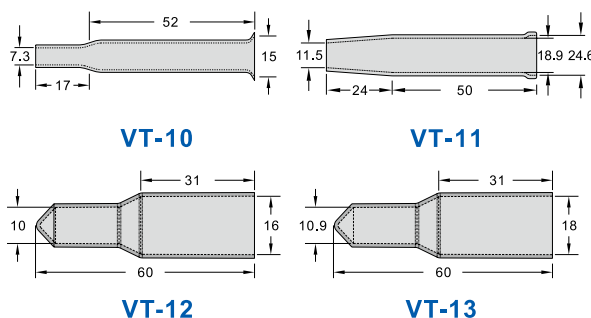


# VINYL WIRE END MARKER CAP

Unit: mm

Part No.	Sq	mm	Color	Packing
MV-1.25	1.25	3.2	Blue · White Black · Red Yellow	100pcs/bag
MV-2	2.0	3.6		
MV-3.5	3.5	4.2		
MV-5.5	5.5	5.1		


● Welcome for special request.



# END CAP

Unit: mm

Part No.	AØ	B	Color	Packing
EP-0308S	3.0	8.8	Black (Red, White, Blue, Yellow, Green Available)	100pcs
EP-0308	3.0	8.0		
EP-0312	3.2	12.0		
EP-0408	4.0	8.0		
EP-0412	4.8	12.0		
EP-0416	4.8	16.0		
EP-0418S	4.0	18.0		
EP-0418	4.8	18.0		
EP-0510	5.7	10.0		
EP-0513	5.7	13.5		
EP-0612	6.3	12.0		
EP-0708	7.6	8.0		
EP-0804	8.0	4.0		
EP-0809	7.8	9.5		
EP-0824	8.0	24.0		
EP-0905	9.4	5.0		
EP-0912	9.4	12.0		
EP-1113	11.4	13.0		
EP-1216	12.0	16.0		
EP-1420	14.0	20.0		
EP-1435	14.0	35.0		
EP-1713	17.8	13.0		

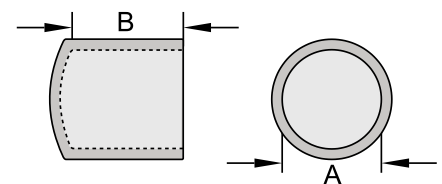


- Material: Soft PVC
- Color : Black

## HEXAGONAL PROTECTION CAP

Unit: mm

Part No.	NUT	Dimension	Packing
HPM-8	M8	As Figure	100pcs

- Material: PE
- Color : Black

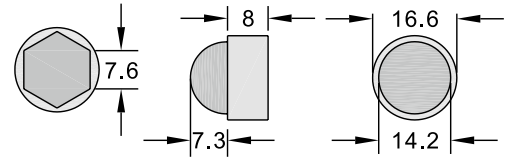


## SCREW PROTECTION CAP

Unit: mm

Part No.	Dimension				Packing
	D	D1	H	H1	
SCP-0709	13	7.5	10.2	9.3	100pcs

- Material: PE
- Color : Black

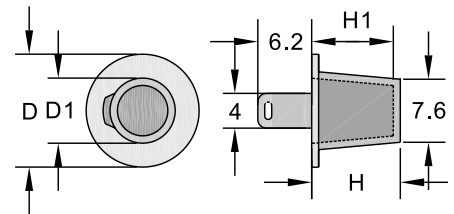


## SCREW PROTECTION CAP

Unit: mm

Part No.	Suitable Screw	W	W1	W2	H	H1	Packing
SCA-1948	3/4"	39.2	26.3	19.0	52.0	48.0	40pcs
SCA-2656	1 "	50.4	37.6	25.2	62.5	56.2	
SCA-3270	1 1/4"	62.0	48.0	30.9	77.4	70.4	20pcs

- Material: PVC
- Feature: Easy to install without using any tool.

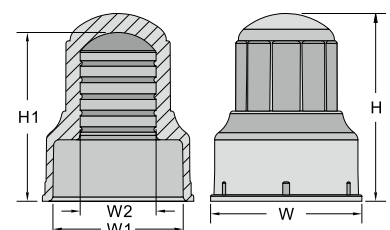


# ALLIGATOR CLIPS

Unit: mm


Part No.	Length	ØC	Ampere	Colour	Packing
AC-1	35	3	2A	Red, Black	100pcs
AC-2	42	3	3A		
AC-3	50	4	5A		
AC-4	68	4	10A		
AC-5	80	5	20A		



● Material: PVC



AC-1, AC-2, AC-3



AC-4, AC-5


# ALLIGATOR CLIPS

Unit: mm


Part No.	Length	ØA	ØB	ØC	Colour	Packing
BC-1	35	5	9	3	Red, Black	100pcs
BC-2	42	6	10	3		
BC-3	50	9	13	4		
BC-4	68	15	16	4		
BC-5	80	15	21	5		



● Material: PVC



BC-1, BC-2, BC-3






BC-4, BC-5

## LAY FLAT HEATSHRINK FOR INSULATING

Unit: mm

Part No.	Lay Flat	Convert to	Shrinkable	Packing
	ØA	ØB	Range	
HS-6.5	6.5	4.1	6.5-3.6	Red. White. Blue. Black  100m/Roll
HS-8.5	8.5	5.2	8.5-4.5	
HS-12	12	7.6	12-6.5	
HS-15	15	10	15-8.5	
HS-20	20	13	21-11	
HS-30	30	19	30-16	
HS-40	40	25	40-22	
HS-50	50	32	50-28	
HS-60	60	38	60-33	
HS-70	70	44	70-37	
HS-80	80	50	80-42	
HS-100	100	63	100-55	
HS-120	120	76	120-65	
HS-150	150	95	150-90	
HS-170	170	108	170-94	
HS-200	200	127	200-110	

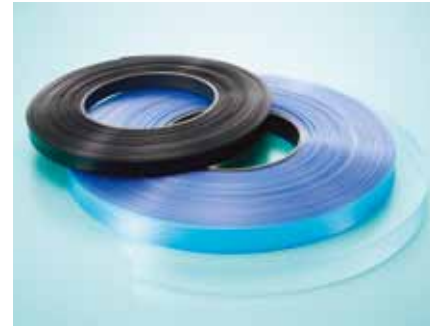

- Material: Rigid Shrinkable PVC
- Used for color distinction and insulation of busbar in control panel. To be shrunk by blower or hot water.
- Maximum service temp: 80°C
- For HS6.5, HS8.5, HS12, HS15, HS20, clear color available on request.

INSULATING

## HEAT SHRINK PACKS

Unit: mm

Part No.	Lengths	Description
HSP-3-BK	9×30.5 cm lengths	F32-3 Black
HSP-5-BK	9×30.5 cm lengths	F32-5 Black
HSP-7-BK	9×30.5 cm lengths	F32-7 Black
HSP-357-C	9×30.5 cm lengths of ea	F32-3.5 White, F32-5 Red, F32-7, Black



- All the above packs are stocked
- Your header card can be supplied please supply details at the time of ordering.

We invite your suggestions on different quantities, sizes, lengths & Colour

# HEAT-SHRINKABLE TUBINGS

Unit: mm

Part No.	inch	Range mm				Packing
		Expanded (min)		Recovered (min)		
		I.D.	Wall Thickness	I.D.	Wall Thickness	
K2-3/64	3/64	1.20	0.10	0.60	0.25±0.05	305m/Roll
K2-1/16	1/16	1.60	0.10	0.80	0.25±0.05	
K2-3/32	3/32	2.40	0.12	1.20	0.27±0.04	152.5m/Roll
K2-1/8	1/8	3.20	0.12	1.60	0.27±0.04	
K2-3/16	3/16	4.80	0.12	2.40	0.27±0.04	61m/Roll
K2-1/4	1/4	6.4	0.14	3.20	0.33±0.05	
K2-3/8	3/8	9.5	0.14	4.80	0.33±0.05	
K2-1/2	1/2	12.7	0.14	6.4	0.33±0.05	
K2-3/4	3/4	19.1	0.18	9.5	0.43±0.07	
K2-1	1	25.4	0.20	12.7	0.48±0.07	



- Material: semi-rigid flame-retarded PVDF.
- Color: colors available on request.
- Shrink temperature: min. 150°C
- Shrink ratio: 2:1; Radial change: min. 50%; Longitudinal change: min. -10 to 5%.
- Continuous operating temperature: -55 to 175°C SAE-AMS/UL recognized, flammabilityVW-1.
- Application: Protection for wire and devices which are used in motorcycle or under high temperature or exposed to chemicals and oils.

# HEAT-SHRINKABLE TUBINGS WITH INNER GLUE

Unit: mm

Part No.	Range mm					Standard
	Expanded (min)		Recovered (min)			Cut
	I.D.	Wall Thickness	I.D.	Wall Thickness	Inside	M
SSA3-1	5.80	0.45	1.26	1.20	0.56	1.22M
SSA3-2	7.5	0.60	1.64	1.52	0.76	
SSA3-3	10.9	0.70	2.40	1.91	1.02	
SSA3-4	17.8	0.80	4.45	2.41	1.37	



- Material: polyolefin with glue.
- Color: black.
- Shrink temperature: min. 135°C
- Shrink ratio: 4:1; Radial change: min. 75%; Longitudinal change: min. -10%
- Continuous operating temperature: -40 to 130°C
- Application: High shrink ratio(4:1) and waterproof protection for harness joints of motor vehicles.

## THIN WALL WATERPROOF / IRRAX SLEEVE

Unit: mm

Part No. 125°C UL CSA	inch	Range mm					Standard
		Expanded (min)		Recovered (min)			Cut
		I.D.	Wall Thickness	I.D.	Wall Thickness	Inside	M
W3F2-1/8	1/8	3.2	0.35	0.6	0.95	0.35	1.22m
W3F2-3/16	3/16	4.8	0.45	1.5	1.1	0.6	
W3F2-1/4	1/4	6.4	0.45	2.0	1.2	0.65	
W3F2-3/8	3/8	9.5	0.50	3.0	1.3	0.65	
W3F2-1/2	1/2	12.7	0.55	4.0	1.4	0.75	
W3F2-3/4	3/4	19.1	0.65	8.0	1.6	0.8	
W3F2-1	1	25.4	0.75	10.2	1.9	0.8	




- Material : polyolefin with glue.
- Recognition : recognized under UL224 and CSA standard, rating voltage 600V and 125°C
- Application of water-proof, anticorrosion and insulation.
- Insulation and protection on different cable connecting.
- Length : 1.22 M

INSULATING

## MEDIUM WALL WATER PROOF / IRRAX SLEEVE

Unit: mm

Part No.	Range mm O		W	Standard
	Expanded (min)	Recovered (min)	Thickness (nominal)	Cut
SCM-04	10.2	3.8	1.5	1.22m
SCM-07	19.0	5.6	2.0	
SCM-11	28.0	9.5	2.0	
SCM-13	33.0	10.2	2.0	
SCM-15	38.1	12.7	2.3	
SCM-17	44.0	14.0	2.3	
SCM-20	52.1	18.2	2.3	
SCM-27	70.0	25.5	2.3	
SCM-35	90.0	30.0	2.5	
SCM-50	125.0	40.0	2.5	



- Material : polyolefin with glue.
- Heavy duty sleeve with glue inside for water proof.
- Application outdoor. Good for CATV cable wiring outdoor.
- Length: 1.22m

	TEST METHOD	Typical Data
TENSILE STRENGTH	ISO 37	21 N/mm <sup>2</sup>
ELONGATION	ISO 37	550%
COLD BEND	ASTM D2671 (-40°C)	NO CRACK
DIELECTRIC STRENGTH	IEC 243	21 kv/mm
VOLUME RESISTIVITY	IEC 93	2×10 <sup>14</sup> Ohm cm
DIELECTRIC GRAVITY	IEC 250	4.1
WATER ABSORPTION	ASTM D570	0.06%
FLAMMABILITY	BS 4066	PASS
CORROSION	ASTM D2671 (16HR AT 150°C)	PASS
WEATHERING	SCM WEATHER RESISTANT	The material from which scm is manufactured contains carbon black to protect it from ultra-violet light

# HEAT SHRINK



Unit: mm

Part No. 125°C UL CSA	Range (mm)		Recovered (min)		Standard length (m)
	Expanded (min)	Recovered (min)	I.D.	Wall Thickness	Spool
F32-1	1.4±0.2	0.20	0.5	0.33	200
F32-1.5	2.0±0.2	0.20	0.75	0.36	
F32-2	2.5±0.2	0.20	1.0	0.44	
F32-2.5	3.0±0.2	0.25	1.25	0.44	
F32-3	3.5±0.3	0.25	1.5	0.44	
F32-3.5	4.0±0.3	0.25	1.75	0.44	
F32-4	4.5±0.3	0.25	2.0	0.44	
F32-5	5.4±0.3	0.25	2.5	0.56	100
F32-6	6.4±0.4	0.25	3.0	0.56	
F32-7	7.4±0.4	0.25	3.5	0.56	50
F32-8	8.4±0.4	0.25	4.0	0.56	
F32-9	9.4±0.4	0.25	4.5	0.56	
F32-10	10.4±0.4	0.25	5.0	0.56	
F32-11	11.4±0.4	0.25	5.5	0.56	
F32-12	12.4±0.4	0.25	6.0	0.56	
F32-13	13.5±0.4	0.30	6.5	0.69	
F32-14	14.5±0.4	0.30	7.0	0.69	
F32-15	15.5±0.5	0.30	7.5	0.69	
F32-16	16.8±0.5	0.30	8.0	0.69	
F32-18	18.7±0.5	0.35	9.0	0.77	
F32-20	21.2±0.6	0.35	10.0	0.77	
F32-22	23.2±0.6	0.40	11.0	0.77	
F32-25	26.1±0.8	0.40	12.5	0.87	
F32-28	29.0±1.0	0.50	14.0	0.87	
F32-30	32.0±1.0	0.50	15.0	0.87	
<b>105°C UL</b>					
FZ-35	37±1.0	0.50	17.5	0.87	50
FZ-40	43.0±1.5	0.50	20.5	0.97	
FZ-50	53.0±2.0	0.50	25.0	0.97	
FZ-60	60min.	0.55	30.0	1.07	
FZ-80	80min.	0.60	40.0	1.17	
FZ-100	100min	0.60	50.0	1.17	30



Property	Condition	Value
<b>PHYSICAL</b>		
Tensile strength (Kg/mm <sup>2</sup> )		1.05min
Elongation (%)		200min.
Tensile Strength after aging (5)	158°C 168hrs &	70 of original min.
Elongation after aging (%)	134°C 60 days	100 min.
Deformation (5)	125°C 1 hr	50 max.
Heat Shock	136°C 1 hr	no crack
Cold bend	10°C 1 hr	no crack
<b>ELECTRICAL</b>		
Dielectric strength (KV)		AC 2.5 min.
Volume resistivity (cm)		10 <sup>14</sup> min.
<b>CHEMICAL</b>		
Corrosion	136°C 168 hrs	pass
Copper stability	100 elongation min.	
Flammability	vw-1	pass

- Material : polyolefin
- Color: Black. Other colors available on request
- Recognition : recognized under UL224 and CSA standard, rating voltage 600V, VW-1at 125°C
- Environment protection
- Feature : insulation or jacketing of wire harness , insulation of wire terminals, capsule of electronic components, identification or colorcoding of wires
- Special length available on request

**Standard colours:** Black, White, Red, Blue, Yellow, Green, Brown, Grey Orange, Purple. Clear also available in different grade.

## HALOGEN FREE HEAT-SHRINKING TUBINGS

Unit: mm

Part No. 125°C UL CSA	Range mm				Standard
	Expanded (min)		Recovered (min)		Cut
	I.D.	Wall Thickness	I.D.	Wall Thickness	M
NHR2-1	1.4±0.2	0.20	0.50	0.33	200M
NHR2-1.5	2.0±0.2	0.20	0.75	0.36	
NHR2-2	2.5±0.2	0.20	1.00	0.44	
NHR2-2.5	3.0±0.2	0.25	1.25	0.44	
NHR2-3	3.5±0.3	0.25	1.50	0.44	
NHR2-3.5	4.0±0.3	0.25	1.75	0.44	
NHR2-4	4.5±0.3	0.25	2.00	0.44	100M
NHR2-5	5.4±0.3	0.25	2.50	0.56	
NHR2-6	6.4±0.4	0.25	3.00	0.56	
NHR2-7	7.4±0.4	0.25	3.50	0.56	50M
NHR2-8	8.4±0.4	0.25	4.00	0.56	
NHR2-9	9.4±0.4	0.25	4.50	0.56	
NHR2-10	10.4±0.4	0.25	5.00	0.56	
NHR2-11	11.4±0.4	0.25	5.50	0.56	
NHR2-12	12.4±0.4	0.25	6.00	0.56	
NHR2-13	13.5±0.4	0.30	6.50	0.69	
NHR2-14	14.5±0.4	0.30	7.00	0.69	
NHR2-15	15.5±0.5	0.30	7.50	0.69	
NHR2-16	16.8±0.5	0.30	8.00	0.69	
NHR2-18	18.7±0.5	0.35	9.00	0.77	
NHR2-20	21.2±0.6	0.35	10.00	0.77	
NHR2-22	23.2±0.6	0.40	11.00	0.77	
NHR2-25	26.1±0.8	0.40	12.50	0.87	
NHR2-28	29.0±1.0	0.50	14.00	0.87	
NHR2-30	32.0±1.0	0.50	15.00	0.87	



- Material: non-halogen flexible polyolefin resin.
- Shrinking temperature: over 100°C.
- Continuous operation temperature: -55°C~125°C.
- Color: black (others upon request).
- Heat & flame resistance, do not use any halogen and antimony flame-retardants.
- UL224 recognition.
- Rating voltage 600V, VW-1 at 125°C.

INSULATING

## HALOGEN FREE HEAT-SHRINKING TUBINGS

Unit: mm

Part No. 125°C UL CSA	Range mm				Standard	
	Expanded (min)		Recovered (min)		Cut	
	I.D.	Wall Thickness	I.D.	Wall Thickness	M	
NHR4-1	1.4±0.2	0.10	0.50	0.20	200M	
NHR4-1.5	1.9±0.2		0.75	0.20		
NHR4-2	2.3±0.2		1.00	0.20		
NHR4-2.5	2.9±0.2	0.15	1.25	0.25		100M
NHR4-3	3.3±0.3		1.50	0.25		
NHR4-3.5	3.8±0.3		1.75	0.25		
NHR4-4	4.4±0.3		2.00	0.25		
NHR4-5	5.5±0.4		2.50	0.25		
NHR4-6	6.5±0.4		3.00	0.28		
NHR4-7	7.5±0.4		3.50	0.28	50M	
NHR4-8	8.5±0.4		4.00	0.28		
NHR4-9	9.5±0.4		4.50	0.28		
NHR4-10	10.5±0.5		5.00	0.28		



- Material: non-halogen flexible polyolefin resin.
- Shrinking temperature: over 100°C.
- Continuous operation temperature: -55°C~125°C.
- Color: black (others upon request).
- Heat & flame resistance, do not use any halogen and antimony flame-retardants.
- UL224 recognition.
- Rating voltage 300V, VW-1 at 125°C.

# PVC TUBE

## Standard Size

Unit: mm

300V		600V		I.D.	Suitable Wire	Packing
Part No.	Wall Thickness	Part No.	Wall Thickness			
NHS-065	0.30±0.06	NHS-065V6	0.47±0.08	0.65±0.10	22AWG	500 M
NHS-080	0.37±0.06	NHS-080V6	0.47±0.08	0.80±0.10	20AWG	
NHS-090	0.37±0.06	NHS-090V6	0.47±0.08	0.90±0.10	19AWG	
NHS-100	0.37±0.06	NHS-100V6	0.47±0.08	1.00±0.15	18AWG	
NHS-120	0.37±0.06	NHS-120V6	0.60±0.08	1.20±0.15	17AWG	
NHS-130	0.37±0.06	NHS-130V6	0.60±0.08	1.30±0.15	16AWG	
NHS-150	0.37±0.06	NHS-150V6	0.60±0.08	1.50±0.15	15AWG	
NHS-170	0.37±0.06	NHS-170V6	0.60±0.08	1.70±0.15	14AWG	
NHS-190	0.40±0.06	NHS-190V6	0.60±0.08	1.90±0.20	13AWG	
NHS-210	0.40±0.06	NHS-210V6	0.60±0.08	2.10±0.20	12AWG	
NHS-240	0.40±0.06	NHS-240V6	0.60±0.08	2.40±0.20	11AWG	
NHS-270	0.40±0.06	NHS-270V6	0.60±0.08	2.70±0.20	10AWG	
NHS-300	0.47±0.08	NHS-300V6	0.60±0.08	3.00±0.25	9AWG	300 M
NHS-330	0.47±0.08	NHS-330V6	0.60±0.08	3.30±0.25	8AWG	
NHS-370	0.47±0.08	NHS-370V6	0.60±0.08	3.70±0.25	7AWG	
NHS-420	0.47±0.08	NHS-420V6	0.60±0.08	4.20±0.30	6AWG	
NHS-470	0.47±0.08	NHS-470V6	0.60±0.08	4.70±0.30	5AWG	
NHS-530	0.47±0.08	NHS-530V6	0.60±0.08	5.30±0.30	4AWG	
NHS-590	0.47±0.08	NHS-590V6	0.60±0.08	5.90±0.30	3AWG	200 M
NHS-660	0.47±0.08	NHS-660V6	0.60±0.08	6.60±0.30	2AWG	150 M
NHS-740	0.47±0.08	NHS-740V6	0.60±0.08	7.40±0.35	1AWG	
NHS-830	0.47±0.08	NHS-830V6	0.60±0.08	8.30±0.35	0AWG	



## Inch Size


300V		600V		I.D.		Packing
Part No.	Wall Thickness	Part No.	Wall Thickness	inch	mm	
NHS-800	0.47±0.08	NHS-800V6	0.60±0.08	5/16"	8.0±0.35	150 M
NHS-950	0.60±0.08	NHS-950V6		3/8"	9.5±0.35	200 M
NHS-111		NHS-111V6		7/16"	11.1±0.35	
NHS-127		NHS-127V6		1/2"	12.7±0.35	150 M

- Material: Flexible, flame retardant PVC.
- Feature: PVC tube is flame retardant, flexible and high reliability products.
- Standard Colors: Black, other colors are available upon request (Clear, White, Red, Blue, Yellow, Green, Brown, Grey, Orange, Violet).

## HOT MELT ADHESIVE TUBE

Unit: mm

Part No.	I.D.	t Wall Thickness	Packing
HM-0.55	0.55	0.25	1 M
HM-1.1	1.1	0.35	
HM-1.5	1.5	0.4	
HM-3.5	3.5	0.4	




- Material: PE Copolymer.
- To connect optical fiber and prevent corrosions.

## OVAL HOT MELT ADHESIVE TUBE

Unit: mm

Part No.	D	d	t Wall Thickness	No. of Fibers	Packing
HM-3014	3.8	2.2	0.4	4C	1 M
HM-3216	3.9	2.25	0.35	8C	
HM-3819	4.55	2.65	0.4	12C	



- Material: PE Copolymer.
- To connect optical fiber and prevent corrosions.

**BANDEX** Cable Accessories

# CABLE CLIPS




## CABLE CLIP

Unit: mm

Part No.	W	H	H1	Nail Size	Packing
NT-1	4.8	7.0	2.5	2.0x15	100pcs

- Material : High Density PE , Masonry steel nail
- Standard color: Grey (others available upon request)
- Applied for telephone cords.
- With nails inserted.





## CABLE CLIPS (FLAT)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NF-09S	8.5	8.0	5.2	1.5mm <sup>2</sup> Flat T&E	2.0X25	100pcs
NF-10S	10.0	10.0	6.5	2.5mm <sup>2</sup> Flat T&E	2.0X25	
NF-0.25	2.1	4.5	1.2		1.65X15	100pcs
NF-05	5.5	5.5	3.1		2.0X15	
NF-06	6.2	6.4	3.8		2.0X15	
NF-06S	6.4	7.0	4.1		2.0X25	
NF-08	8.0	8.0	5.0	1.0mm <sup>2</sup> Flat T&E	2.0X15	
NF-09	8.5	8.0	5.2	1.5mm <sup>2</sup> Flat T&E	2.5X18	
NF-10	10.0	10.0	6.5	2.5mm <sup>2</sup> Flat T&E	2.5X18	
NF-2.3	10.2	8.0	4.6		2.0X25	
NF-14	13.5	11.6	8.1	6.0mm <sup>2</sup> Flat T&E	2.5X22	
NF-15	15.0	12.8	8.7		2.5X22	
NF-18	18.0	12.9	9.5	10mm <sup>2</sup> Flat T&E	2.5X27	50pcs
NF-19	19.0	14.2	11.1	16mm <sup>2</sup> Flat T&E	2.5X27	
NF-5.0	49.0	33.0	26.0		4.0X50	100pcs
NFT-4.0	11.6	9.7	6.4	4.0mm <sup>2</sup> T&E	2.0X25	
NF-1122	21.1	14.5	11.3		2.5X35	



- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Applied for telephone cords.
- With nails inserted.

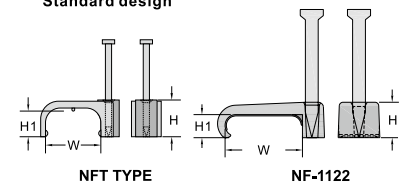

# CABLE CLIPS (ROUND)


Unit: mm

Part No.	Size			Nail Size	Packing
	W	H	H1		
NK-05S	5.0	7.6	5.0	2.0x20	100 pcs
NK-06S	6.0	9.0	6.6	2.0x20	
NK-08S	8.0	12.9	8.15	2.0x25	
NK-09S	9.0	12.0	9.0	2.0x25	
NK-10S	10.0	12.8	10.4	2.0x25	



- Material : High Density PE , Masonry steel nail
- Standard color: Grey (others available upon request)
- Applied for general round cables.
- With nails inserted.

Part No.	Size			Nail Size	Packing	
	W	H	H1			
NK-0275	2.75	4.5	2.6	1.65X19	100pcs	
NK-035	3.5	5.9	3.7	2.0X15		
NK-04	4.0	6.6	4.2	2.5X18		
NK-05	5.0	7.6	5.0	2.5X18		
NK-06	6.0	9.6	6.6	2.5X18		
NK-06L	6.0	10.5	6.9	2.5X20		
NK-07	7.0	11.0	7.5	2.5X22		
NK-08	8.0	12.9	8.2	2.5X22		
NK-09	9.0	12.8	9.0	2.5X22		
NK-10	10.0	13.8	10.4	2.5X25		
NK-11	11.0	16.6	12.2	2.5X27		
NK-12	12.0	16.0	12.3	2.5X27		
NK-14	14.0	20.0	15.6	3.0X35		
NK-16	16.0	21.7	17.0	3.2X38		
NK-18	18.0	22.4	17.5	3.2X38		
NK-19	19.0	23.3	18.6	3.2X38		
NK-20	20.0	23.5	18.5	3.2X38		
NK-22	22.0	27.8	23.0	3.2X42		
NK-23	23.0	29.0	24.1	3.2X47		
NK-25	25.0	30.4	26.0	3.2X47		
NK-32	32.0	40.0	33.5	3.6X56		50pcs



Part No.	Size			Nail Size	Packing
	W	H	H1		
NU-7N	16.0	21.5	17.7	3.2X38	100pcs
NU-8N	20.0	26.4	21.7	3.2X42	
NU-9N	24.0	31.0	25.8	3.2X47	




## CABLE CLIPS (ROUND-Multi Size dia.)

Unit: mm

Part No.	Max dia W	Nail Size	Packing
NT-0204	4.1	2.0x20	100pcs
NT-0407	7.0	2.0x20	
NT-0711	9.0	2.0x35	
NT-1114	13.2	2.0x35	

- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)




## CABLE CLIPS (FLAT)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NF-0.18	4.5	4.3	2.7	0.8m/m <sup>2</sup> 2C	2.0x15	100pcs
NFR-1	5.1	6.8	3.0	0.8m/m <sup>2</sup> 2C	2.5x18	
NFR-1S	5.1	6.8	3.0	0.8m/m <sup>2</sup> 2C	2.0x2.0	

- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Applied for flat cables.
- With nails inserted.

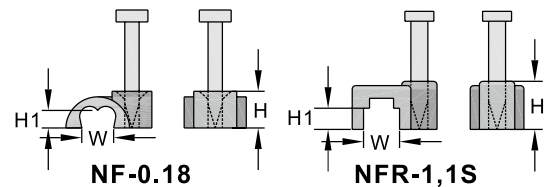


## CABLE CLIPS (FLAT)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NFTT-1.0GYT	7.6	6.8	4.0	1.0mm <sup>2</sup> Flat T&E	2.0x25	100pcs
NFTT-1.5GYT	8.5	7.3	4.5	1.5mm <sup>2</sup> Flat T&E	2.0x25	
NFTT-2.5GYT	10.3	8.2	5.3	2.5mm <sup>2</sup> Flat T&E	2.0x25	
NFTT-4.0GYT	11.9	9.5	6.4	4.0mm <sup>2</sup> Flat T&E	2.0x25	
NFTT-6.0GYT	13.3	10.5	7.3	6.0mm <sup>2</sup> Flat T&E	2.0x30	
NFT-10GYT	17.1	11.6	8.7	10mm <sup>2</sup> Flat T&E	2.0x30	
NFT-16GYT	20.2	13.2	10.0	16mm <sup>2</sup> Flat T&E	2.5x35	
NFT-1.5GYT	9.8	6.7	4.4	1.0mm <sup>2</sup> +1.5mm <sup>2</sup> Flat 3C+E	2.0x25	
NFD-1.0GYT	17	7.2	4.5	1.0mm <sup>2</sup> +1.5mm <sup>2</sup> DOUBLE Flat T&E	2.0x25	
NFD-2.5GYT	19	8.6	5.3	2.5mm <sup>2</sup> DOUBLE Flat T&E	2.0x25	

- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Applied for flat cables.
- With nails inserted.

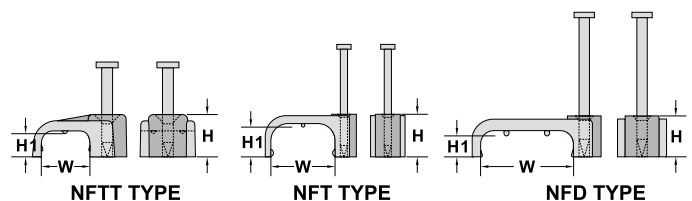


# CABLE CLIPS (FLAT)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NJ-9.5NA	9.5	9.0	4.5	1.5mm <sup>2</sup> Flat T&E	2X25	100pcs
NJ-12NA	12.4	10.4	6.0	2.5mm <sup>2</sup> Flat T&E	2X25	


Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NFP-2.1	9.3	8.7	4.0	2.5mm <sup>2</sup> Twin	2.0X25	100pcs
NF-14S	11.9	9.6	6.2	4.0mm <sup>2</sup> Twin	2.0X25	
NF-15S	15.0	11.0	6.8	6.0mm <sup>2</sup> Twin	2.0X25	

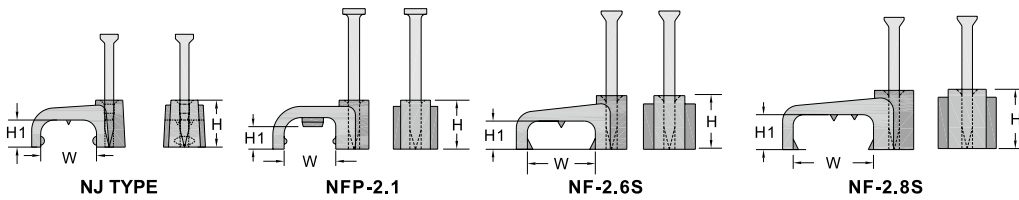

# CABLE CLIPS

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Color	Packing
	W	H	H1				
NF-0204NA	4.0	4.0	2.0	For Bellwire	1.2X15	Natural	100pcs
NF-0305NA	4.6	5.2	3.3	Speaker cable	1.2X20		
NF-0406NA	5.8	5.9	3.8	For Sheath Twin Cable	1.4X20		
NF-0508GY	7.9	7.5	4.9	For 1.0 & 1.5mm <sup>2</sup> T&E	2.0X25	Grey	
NF-0610GY	9.8	8.2	5.8	For 2.5mm <sup>2</sup> T&E	2.0X25		
NF-0714GY	11.8	9.3	6.5	For 4 & 6mm <sup>2</sup> T&E	2.5X25		
NF-0918GY	16.7	12.2	9.4	For 10 & 16mm <sup>2</sup> T&E	2.5X30		
NFD-0508GY	15.1	7.0	4.5	For 2x1.0 & 1.5mm <sup>2</sup> T&E	2.5X25		
NFD-0610GY	19.2	8.4	5.3	For 2x2.5mm <sup>2</sup> T&E	2.5X25		




# CABLE CLIPS

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Color	Packing
	W	H	H1				
NU-0203NA	2.8	4.3	2.8	For 2-3mm Round Cable	1.2X15	Natural	100pcs
NU-0305NA	2.9	5.6	3.7	For 3-5mm Round Cable	1.2X20		
NU-0507	5.3	8.0	6.0	For 5-7mm Round Cable	2.0X25	Grey	
NU-0710	6.8	9.5	7.1	For 7-10mm Round Cable	1.6X25		
NU-1014	9.4	13.0	10.3	For 10-14mm Round Cable	2.0X30		
NU-1420	13.1	17.1	13.7	For 14-20mm Round Cable	2.0X35		
NU-1822	16.4	19.5	17.0	For 18-22mm Round Cable	2.5X45		
NU-2226	19.5	24.0	21.0	For 22-26mm Round Cable	2.5X45		



- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)




## CABLE CLIPS-FLAT (FLAT-DOUBLE NAIL)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
DNF-13	12.5	8.0	5.3	#14/2, 14/3, 12/2	1.86x31	100pcs
DNF-17	17.7	14.7	11.5		2.0x44	
DNF-19	18.7	8.0	5.3	#12/3, 10/2, 10/3	1.86x31	
DNF-24	24.0	17.1	13.6		2.0x44	
DNF-37	36.8	26.1	22.5		2.3x50	50pcs



- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Feature: Double nail ensure cable firmly in place.

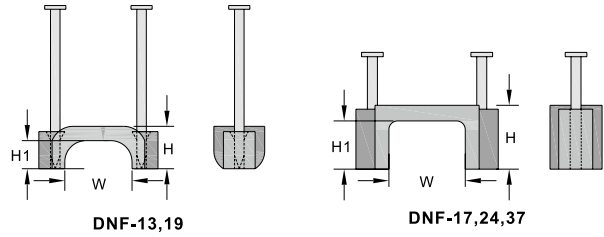


## CABLE CLIPS-FLAT

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NS-0508	5.0	8.3	7.0	For 5-8mm Round Cable	1.2X20	100pcs
NS-0812	8.0	11.0	9.0	For 8-12mm Round Cable	2.0X30	
NS-1014	10.0	12.0	10.0	For 10-14mm Round Cable	2.0X30	
NS-1420	14.0	16.5	14.0	For 14-20mm Round Cable	2.0X35	
NS-2026	18.0	23.0	20.0	For 20-26mm Round Cable	2.5X45	



- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)




## CABLE CLIPS (ROUND EURO TYPE-Multi Size dia.)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NC-0507S	5.7	7.1	5.2	For 5-7mm Round Cable	1.65 x 19	100pcs
NC-0507	5.7	7.1	5.2	For 5-7mm Round Cable	2.0 x 20	
NC-0507L	6.1	8.5	6.0	For 5-7mm Round Cable	2.0 x 20	
NC-0810	7.8	10.9	8.0	For 8-10mm Round Cable	2.0 x 25	
NC-1115	11.2	14.7	11.0	For 11-15mm Round Cable	2.0 x 35	
NC-1619	14.4	18.4	14.6	For 16-19mm Round Cable	2.5 x 40	



- Material : High Density PE , Masonry steel nail
  - Standard color: White (others available upon request)
- ※ NC-0507L Longer Hook




# CABLE CLIPS-ROUND (ROUND-DOUBLE NAIL)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
DNR-17	17	21.5	17.7	1/2 "	2.0×44	50pcs
DNR-32	32	40	33.5	1 "	3.6×56	20pcs
DNR-40	40	50	41.0	1 1/4 "	4.0×68	
DNR-50	50.3	48.3	50.3	1 1/2 "	4.0×78	
DNR-62	62	71	62.0	2 "	4.5×97	



- Material : High Density PE , Masonry steel nail
- Standard color: Grey (others available upon request)
- Feature: Double nail ensure cable firmly in place.




# COATED COPPER TUBE CLIP

Unit: mm

Part No.	Size				Suitable for coated copper tube	Nails size	Packing
	W	H	H1	H2			
MNC-23	43.5	33.0	26.0	21.5	2~3	4.0×50	50PCS
MNC-24	50.5	42.0	34.5	23.0	2~4	4.0×68	
MNC-25	53.0	45.0	38.0	21.5	2~5	4.0×68	25PCS
MNC-35	57.5	45.7	38.3	24.0	3~5	4.0×68	
MNC-46	69.3	48.0	41.3	32.0	4~6	4.0×78	



- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Function: Special for coated copper pipe in air conditioner

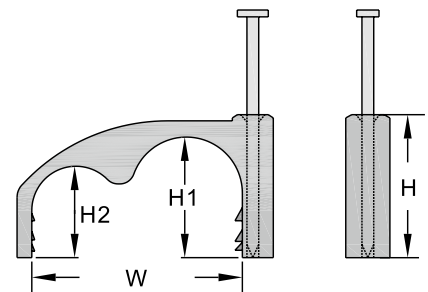


## PIN PLUG

Unit: mm

Part No.	W	L	Packing
PP-0518	5	18	100pcs

- Material : High Density PE
- Standard color: White (others available upon request)



## DISPLAY PACKS

Unit: mm

### ROUND CLIPS

Part No.	W (mm)	Packing
PNK035	3.5	100pcs/box
PNK04	4	
PNK05	5	
PNK06	6	
PNK07	7	
PNK08	8	
PNK09	9	
PNK10	10	
PNK11	11	
PNK12	12	
PNK14	14	
PNK16	16	
PNK20	20	
PNK22	22	
PNK25	25	
PNK32	32	25pcs/box

### FLAT CLIPS

Part No.	W (mm)	Packing
PNF05	5.5	100pcs/box
PNF06	6.2	
PNF08	8.0	
PNF09	8.5	
PNF10	10.0	
PNF14	13.5	
PNF14S	13.5	
PNF15	15	
PNF15S	15	
PNF18	18	
PNF19	19	



### BOXING

Design your own boxing with your own company logo printed on the box.

# PE BUCKETS

Our unique display buckets which are also available in 2or 4 compartments allow you the opportunity to create a blend of product mix to meet your own special requirement. We welcome your orders inquiry but please check first that our display packs can accommodate your intended quantity.



## QB-500

CONTENTS:

NC-0810	500pcs	White
---------	--------	-------

## QB-800

CONTENTS:

NK04	300pcs	Grey
NK05	300pcs	Grey
NF09	100pcs	White
NF10	100pcs	White

## QB-850

CONTENTS:

NK04	300pcs	Grey
NK07	150pcs	Grey
NK09	100pcs	Grey
NF06B	300pcs	Black

## QBS-400

CONTENTS:

NK06	100pcs	White
NK07	100pcs	White
NK08	100pcs	White
NK09	100pcs	White

## QB-1200

CONTENTS:

NK05	1200pcs	Grey
------	---------	------

\*AVAILABLE INDIFFERENT QUANTITY/SIZE/COLOR

CABLE CLIPS ALSO AVAILABLE IN 4 COMPARTMENT ROUND OR SQUARE CANISTER PACKING

## CABLE CLIPS-FLAT FIGURE 8

### PVC HANGERS

A unique display pack, available in 3 handy sizes, can also be printed with your companies own design.

**Small Box:-** is able to take up to 100 pieces of a 6mm clip

**Medium Box:-** is able to take up to 100 pieces of a 9mm clip

**Large Box:-** is able to take up to 100 pieces of a 12mm clip

Of course we welcome your own special requirements, where you are welcome to mix and match size and quantities as you please.



### SMALL BOX

SNK04	100pcs	White
SNK05	100pcs	White
SNK06	100pcs	White

### MEDIUM BOX

MNK07	100pcs	White
MNK08	100pcs	White
MNK09	100pcs	White

### LARGE BOX

LNK10	100pcs	White
LNK11	100pcs	White
LNK12	100pcs	White

\*AVAILABLE IN DIFFERENT QUANTITY  
/ SIZE / COLOR

**BANDEX** Cable Accessories


# PCB SPACERS AND SUPPORTS



## LOCKING CIRCUIT BOARD SUPPORTS

Unit: mm

Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
CS-0305	4.8 (3/16")	4.0	1.8	4.8	2.5	100pcs
CS-0305S	4.8 (3/16")	3.0	2.0	3.0	2.0	
CS-0406	6.4 (1/4")	4.0	1.8	4.8	2.5	
CS-0406S	6.4 (1/4")	4.0	2.3	4.8	2.0	
CS-0610	9.3 (3/8")	4.0	1.8	4.8	2.5	
CS-0813	12.7 (1/2")	4.0	1.8	4.8	2.5	
CS-1016	15.9 (5/8")	4.0	1.8	4.8	2.5	
CS-1219	19.1 (3/4")	4.0	1.8	4.8	2.5	
CS-1422	22.2 (7/8")	4.0	1.8	4.8	2.5	
CS-1625	25.4 (1")	4.0	1.8	4.8	2.5	
CS-1828	28.5 (1 1/8")	4.0	1.8	4.8	2.5	
CS-2236	35 (1 3/8")	4.0	1.8	4.8	2.5	
CS-2236L	35 (1 3/8")	4.8	1.8	4.8	2.5	

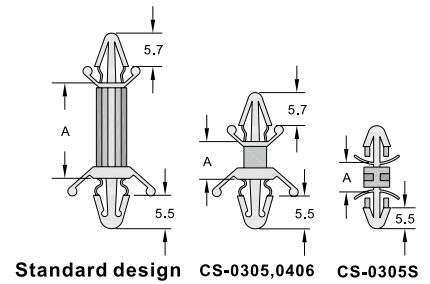


- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Feature: Easy to install / unload by hand, without tool. Pre-drill the hole on P.C Board and chassis before usage. Double locking design ensure that once support inside the panel cannot be removed accidentally, simply to push - through.

## PCB SUPPORT

Unit: mm

Part No.	A	P.C.B		Chassis		Packing
		hole	thickness	hole	thickness	
CS-0305L	5.4	4.0	2.4	4.0	2.4	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## PCB SUPPORT

Unit: mm

Part No.	A	P.C.B		Chassis		Packing
		hole	thickness	hole	thickness	
MCS-6	6.0	4.0	1.8	4.8	2.0	100pcs
MCS-8	7.8	4.0	1.7	4.8	5.0	
MCS-9	9.4	4.0	1.6	4.8	2.0	
MCS-12	11.5	4.0	1.7	4.8	5.0	
MCS-19	19.0	4.0	2.0	4.8	2.0	


- Material: UL approved Nylon 66, 94V-2
- Color: Natural

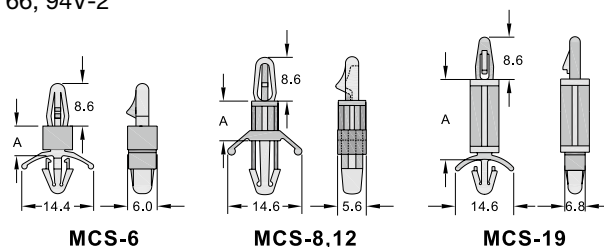

# MINIATURE SUPPORT POSTS

Unit: mm

Part No.	A	B	PCB		Chassis		Packing
			hole	thickness	hole	thickness	
SP-3	3.2	3.8	4.0	1.6	4.0	1.6	100pcs
SP-3S	3.2	3.6	3.2	1.6	3.2	1.6	
SP-6	6.3	3.8	4.0	1.6	4.0	1.6	
SP-8	8.0	3.8	4.0	1.6	4.0	1.6	
SP-10	10.5	3.8	4.0	1.6	4.0	1.6	
SP-13	12.7	5.6	4.0	1.6	4.0	1.6	
SP-16	15.9	5.6	4.0	1.6	4.0	1.6	
SP-17	16.5	5.6	4.0	1.6	4.0	1.6	
SP-19	19.1	5.6	4.0	1.6	4.0	1.6	
SP-22	22.2	5.6	4.0	1.6	4.0	1.6	
SP-25	25.4	5.6	4.0	1.6	4.0	1.6	

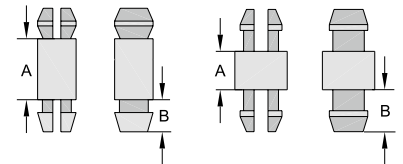

Standard design

SP-3S

- Material: UL approved Nylon 66,94V-2
- Color: Natural
- Pre-drill the hole on P.C. board and chassis before usage. Easy to install / unload by hands, without tool.
- For application where the space is limited and extra height is prohibited.





# PCB SUPPORT

Unit: mm

Part No.	A	B	PCB		Chassis		Packing
			hole	thickness	hole	thickness	
SPB-6	6.2	5.5	4.0	1.8	4.0	1.8	100pcs
SPC-9	9.3	4.0	4.0	1.6	4.0	1.6	
SPD-9	9.5	5.5	3.5	1.8	3.5	1.8	
SPB-20	20.0	5.5	4.0	1.8	4.0	1.8	
SPA-28	28.2	3.6	3.6	1.6	3.8	1.6	



- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## SUPPORT POST

Unit: mm

Part No.	A	P.C.B		Chassis		Packing
		hole	thickness	hole	thickness	
LCA-14	13.6	2.5	2.0	3.0	1.7	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## PCB SUPPORT

Unit: mm

Part No.	A	B	PCB		Chassis		Packing
			hole	thickness	hole	thickness	
DS-18	18.2	3.7	2.5	1.6	2.5	1.5	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## SCREW FASTENED CIRCUIT BOARD SUPPORTS


Unit: mm

Part No.	A	PCB		Chassis	Packing
		hole	thickness	thickness	
CS-5	4.9	4.0	2.0	3.0	100pcs
CS-10	9.6	4.0	2.0	3.0	
CS-13	12.7	4.0	2.0	3.0	
CS-19	19.1	4.0	2.0	3.0	
CS-28	28.5	4.0	2.0	3.0	
CS-35	35.0	4.0	2.0	3.0	
CSA-14	13.9	4.0	2.0	2.5	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Pre-drill the hole on chassis, and fixed by #6 screw.



CS-TYPE




CSA-14




# REVERSE LOCKING CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
RLS-5	5.0	5.5	1.8	100pcs
RLS-6	6.4			
RLS-8	8.0			
RLS-9	9.8			
RLS-10	10.1			
RLS-12	12.0			
RLS-14	14.0			
RLS-18	18.0			



RLS-5,6,10




RLS-8,9,12,14,18

- Material: UL approved Nylon 66, 94V-2
- Color: Natural


# PCB SUPPORT

Unit: mm


Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
RS-2D	2.5	4.0	1.8	5.0	3.2	100pcs
RS-3	3.5	4.0	1.8	5.5	1.4	
RS-5	5.0	4.0	1.8	5.5	1.8	
RS-5D	5.0	4.0	1.8	5.0	3.2	
RS-5S	5.0	3.0	1.7	4.8	2.0	
RS-6	6.1	4.0	1.8	5.5	1.8	
RS-6A	5.6	4.0	1.6	6.4	1.8	
RS-6B	5.6	4.0	1.8	6.4	1.4	
RS-6C	6.1	4.2	1.8	5.2	1.4	
RS-6S	5.9	3.5	1.8	5.3	1.8	
RS-7A	6.6	4.0	1.6	5.4	1.6	
RS-8	8.0	4.0	1.8	5.5	1.8	
RS-8S	6.1	4.0	1.6	5.5	1.8	
RS-10	9.8	4.0	1.8	5.5	1.8	
RS-10S	9.3	4.0	1.6	5.5	1.8	
RS-10A	9.8	4.0	1.6	5.4	1.8	
RS-10L	9.8	4.0	1.6	5.5	1.8	
RS-12	12.0	4.0	1.8	5.5	1.8	
RS-12C	12.1	4.2	1.8	5.2	1.4	
RS-12H	11.8	4.0	1.6	5.5	1.8	
RS-14	14.0	4.0	1.8	5.5	1.8	
RS-18	18.0	4.0	1.8	5.5	1.8	




Standard design




RS-3,6B




RS-10,10S,12H




RS-6C,12C



RS-8S



RS-6A,7A,10A



RS-10L


- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Stand on design to lock Print circuit board.
- No tool is needed and easy to fix or remove from PC board.

## CIRCUIT BOARD EJECTOR

Unit: mm

Part No.	Packing
BE-1	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Pre-drill hole on P.C.B.: 2.5-2.6mm. and press directly into PC board.
- Suitable for PCB thickness 1.6mm

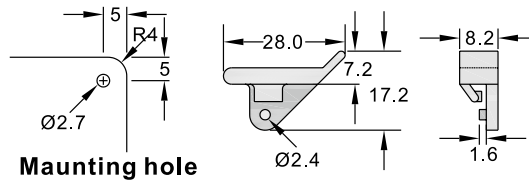


Mounting hole

## BLIND HOLD CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	A	PCB		Mounting Hole	Packing
		hole	thickness		
BCS-5	5.2	4.4	2.0	7.6	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## SCREW FASTENED CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	Dimension	PCB		Packing
		hole	thickness	
SCS- 10	10.1	4.0	2.0	100pcs
SCS- 25	25.4			


- Material: UL approved Nylon 66, 94V-2
- Color: Natural



# PUSH SPACER

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
PS-5	4.8	4.8	2.0	100pcs
PS-6	6.4			
PS-10	9.6			
PS-13	12.7			
PS-16	15.9			
PS-19	19.1			
PS-22	22.2			
PS-25	25.4			
PS-28	28.5			
PS-36	35.0			




- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Pre-drill the hole on chassis board and press push spacer into it.
- To support and stabilize PC board

# PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	Packing
EB-9	13.5	13.6	1.8	8.7	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




# CIRCUIT BOARD EDGE SPACER

Unit: mm

Part No.	A	B	C	D	E	Packing
ES-5A	5.4	2.2	5.5	10.3	9.5	100pcs
ES-6A	6.0	1.9	9.0	10.8	8.7	
ES-6M	5.8	2.2	9.3	10.7	9.5	
ES-6P	6.0	1.9	9.0	10.8	8.7	
ES-6V	6.0	1.9	9.0	10.8	8.7	
ES-8U	8.4	2.0	6.7	13.3	9.8	




- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- To stabilize PC board, easy to remove.




ES-5A


ES-6A




ES-6M



ES-6P



ES-6V





ES-8U

## SLIDE SECURE CIRCUIT BOARD SUPPORTS

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
MS-6	6.4	4.0	2.0	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Drill holes on chassis board as shown.
- Push support into the larger hole and slide onto the smaller one to get fixed.
- To stabilize PC board, easy to remove.

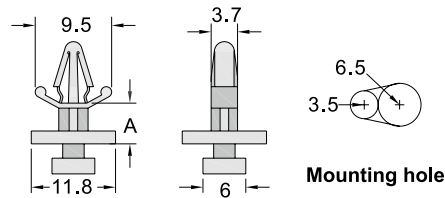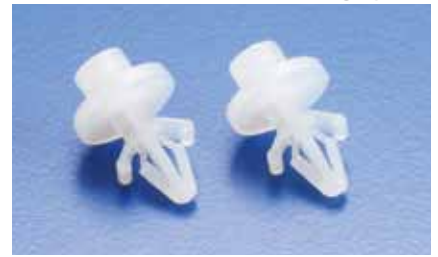


## SLIDE SECURE CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	A	B	C	PCB		Packing
				hole	thickness	
BMS-5	5.6	9.5	11.8	4.0	2.0	100pcs
BMS-5B	5.6	9.5	9.7	4.0	2.0	
BMS-5L7	5.6	9.5	7.1	4.8	2.0	
BMS-5L	5.6	9.5	11.8	4.8	2.0	
BMS-7	6.5	9.5	11.8	4.0	2.0	
BMS-8	8.0	9.5	11.8	4.0	2.0	
BMS-11	11.0	9.0	12.0	4.0	2.0	
HMS-6	6.0	5.0	7.0	4.8	2.0	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural, available in other colors.

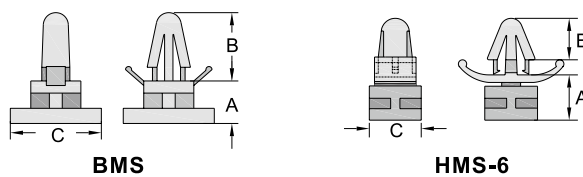


## PCB SUPPORT

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
TMS-17	17.2	4.0	1.4	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural, available in other colors.




# PCB SUPPORT

Unit: mm

Part No.	Dimension		PCB		Packing
	A	B	hole	thickness	
MMS-2	2.2	14.9	3.2	1.8	100pcs
MMS-21	21.3	17.9	4.0	1.8	



- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- With adhesive tape.

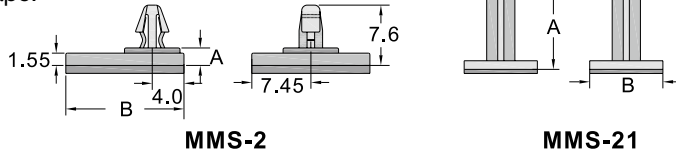

MMS-2

MMS-21


# SELF-ADHESIVE PCB SUPPORT

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
MMR-5	4.8	3.2	1.6	100pcs
MMR-6	6.4			
MMR-8	7.9			
MMR-9	9.5			
MMR-11	11.1			
MMR-13	12.7			
MMR-14	14.3			
MMR-16	15.9			



- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- With adhesive tape.




# CIRCUIT BOARD TRACK

Unit: mm


Part No.	A	B	C	D	E	F	G	Packing
BT-90A	89.5	78.0	2.0	4.5	9.7	1.5	3.0	100pcs
BT-90	89.5	64.5	2.0	4.5	9.7	1.5	3.0	
BT-120	119.0	95.5	2.0	4.5	9.5	1.5	3.0	
BT-140	141.0	115.5	2.0	4.5	9.7	1.5	3.0	
BT-155A	154.0	141.0	2.0	4.6	6.6	1.3	3.3	
BT-160	160.5	135.5	2.0	4.5	9.7	1.5	3.0	
BT-160A	163.0	149.5	2.0	6.5	9.5	4.0	2.5	black
BT-77DBK	77.0	67.0	1.4	6.0	6.6	1.5	3.0	




- Material: UL approved Nylon 66, 94V-2
- Color: Natural, available in other colors.
- To be fixed by 2 sets of 3mm flat-head screw.
- ★ BT-90A, BT-155A, BT-160A with snap in design.




BT-90A, BT-155A

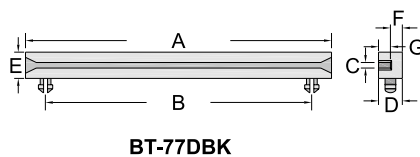

BT-77DBK

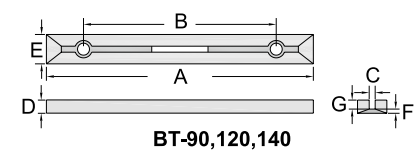

BT-90, 120, 140

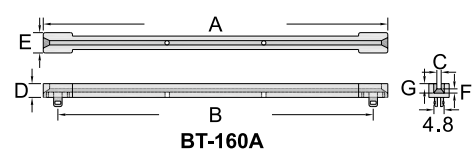


BT-160A

## HEXAGONAL THREADED SPACER

Unit: mm

Part No.	A	B	C/D	L	L1	Packing
HTS-205	4.0	5	M2x0.4	5	4.0	100pcs
HTS-208	4.0	5		8	6.0	
HTS-210	4.0	5		10	6.0	
HTS-215	4.0	5		15	6.0	
HTS-306	5.6	6	M3x0.5	6	5.3	
HTS-308	5.6	6		8	7.5	
HTS-310	5.6	6		10	6.5	
HTS-312	5.6	6		12.7	10.0	
HTS-315	5.6	6		15	10.0	
HTS-317	5.6	6		17	10.0	
HTS-318	5.6	6		18	10.0	
HTS-320	5.6	6		20	10.0	
HTS-322	5.6	6		22	10.0	
HTS-325	5.6	6		25	10.0	
HTS-330	5.6	6	M4x0.7	30	10.0	
HTS-410	7.0	6		10.1	10.0	
HTS-413	7.0	6		13	7.0	
HTS-415	7.0	6		15	10.0	
HTS-419	7.0	6		19	10.0	
HTS-425	7.0	6		25	10.0	
HTS-430	7.0	6		30	10.0	




- Material: UL approved Nylon 66, 94V-2
- Color: Natural

## HEXAGONAL THREADED SPACER

Unit: mm

Part No.	A	B	C	Packing
HTP-306	6.0	5.5	M3x0.5	100pcs
HTP-308	8.0	5.5		
HTP-310	10.0	5.5		
HTP-312	12.7	5.5		
HTP-315	15.0	5.5		
HTP-318	18.0	5.5		
HTP-320	20.0	5.5		
HTP-322	22.0	5.5		
HTP-325	25.0	5.5		
HTP-330	30.0	5.5		




- Material: UL approved Nylon 66, 94V-2
- Color: Natural

# SLIDE SECURE CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	L	A	B	C	Packing
HTN-380	79	5.5	15	2.7	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




# PCB SUPPORT

Unit: mm

Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
KCS-0813V0	12.5	4.0	2.5	4.8	2.5	100pcs

- Material: UL approved Nylon 66, 94V-0
- Color: White




# PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	Packing
SPS-6	6.5	3.9	7.0	6.0	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## PCB SUPPORT

Unit: mm

Part No.	A	H	C	Packing
PB-10	9.6	29.6	M4x10mm	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## PCB SUPPORT

Unit: mm

Part No.	A	H	C	Packing
PST-18	19.0	25.8	#6-32UNC	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## PCB SUPPORT

Unit: mm

Part No.	A	Packing
HGS-7	7.0	100pcs
HGS-8	7.9	
HGS-11	7.0	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

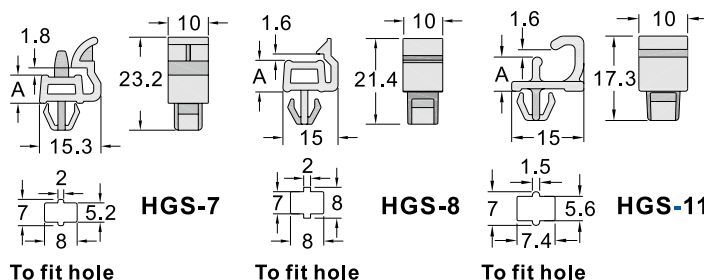


# PCB SUPPORT

Unit: mm

Part No.	A	Packing
GS-10	10	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

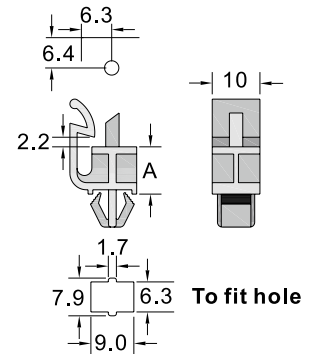


# PCB SUPPORT


Unit: mm

Part No.	A	Packing
SWS-1	11.0	100pcs
SWS-2	10.0	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural



SWS-1

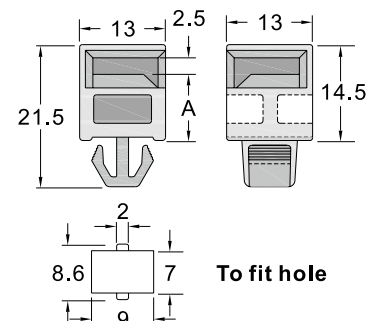


SWS-2

## PCB SUPPORT

Unit: mm

Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
LCS-0610V0	9.4	4.0	2.0	4.8	2.0	100pcs

- Material: UL approved Nylon 66, 94V-0
- Color: White




## PCB SUPPORT

Unit: mm

Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
LCS-10A	9	4.0	1.8	4.0	1.8	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## PCB SUPPORT

Unit: mm

Part No.	A	Packing
LCL-8WE6	7.9	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




# PCB SUPPORT

Unit: mm

Part No.	Dimension	PCB		Packing
		hole	thickness	
PCU-23	As Figure	4.5	4.0	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural



# SNAP RIVET


Unit: mm

Part No.	A	B	C	Packing
SR- 355K	3.0	5.5	2.5-4.0	1000pcs
SR- 365K	3.0	6.5	4.0-5.0	
SR- 380K	3.0	8.0	5.5-6.5	
SR- 450K	4.0	5.0	2.2-3.5	
SR- 465K	4.0	6.5	4.0-5.0	
SR-0612K	6.2	12.3	7.0~10.0	
SR-0815K	8.0	14.0	7.0~12.0	

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Rivet post pressure expands legs for fast and permanent fastening.
- ※ Male-and-female integrated design.



SR-0612K & SR-0815K

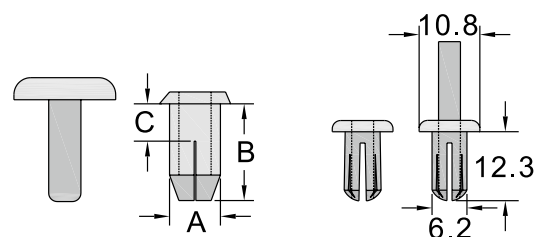

Standard design


SR-0612K & SR-0815K

## PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	E	F	G	Packing
SR-0813	10.7	7.0	5.5	7.8	15.8	25.1	15.6	100pcs
SR-0910	10.8	7.6	1.6	8.1	15.8	20.9	11.4	

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.




## PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	E	F	Panel	Packing
SR-611	6.0	11.0	14.0	2.4	8.0	1.0	2~3.5	100pcs
SR-611R	6.6	11.0	16.0	1.4	8.4	2.5	1.5~6	
SR-614	6.3	14.2	15.1	1.95	10.2	1.65	3~4.5	

- Material: UL approved Nylon 66, 94V-2
- Color: Black, available in other colors.
- Drill holes on chassis board and press push rivet into it.

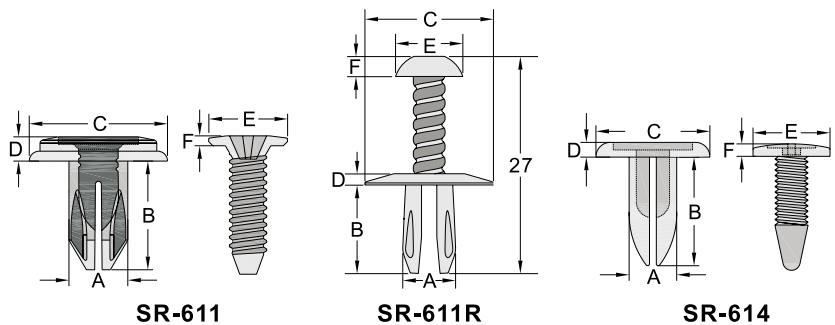


# PUSH RIVET

Unit: mm

Part No.		W	W1	D	H	H1	Packing
SR-0313	Natural	3.2	3.2	6.3	14.9	12.9	100pcs
SR-0512BK	Black	5.1	4.7	11.2	13.6	12.5	
SR-1315	Natural	4.6	4.6	12.9	17.0	14.9	
SR-0816BK	Black	8.0	8.0	15.0	17.8	15.8	
SR-0817BK	Black	7.5	7.5	15.0	19.3	16.8	
SR-0420BK	Black	3.8	3.8	18.0	22.5	20.0	
SR-25BK	Black	6.6	6.6	17.85	27.2	25.2	



● Material: UL approved Nylon 66, 94V-2

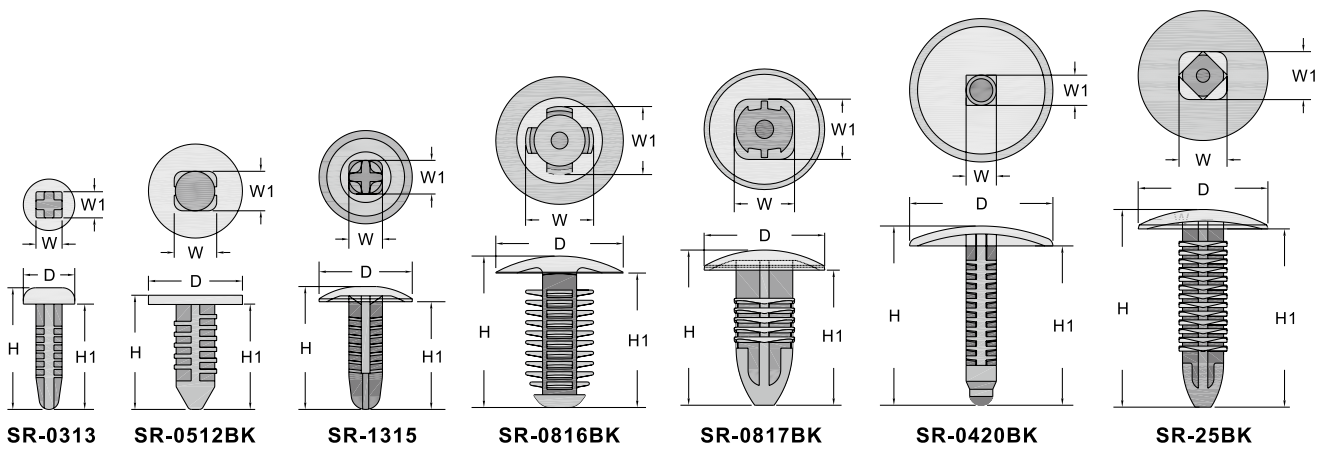


# PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	E	F	G	Packing
SR-0809	8.5	7.4	1.9	6.3	7.1	13.6	11.1	100pcs
SR-0810	8.5	7.4	2.1	6.3	8.1	18.4	11.9	
SR-1010	10.8	7.8	2.6	8.0	9.2	19.1	12.9	



● Material: UL approved Nylon 66, 94V-2  
 ● Color: Natural




## CANOE RIVET

Unit: mm

Part No.	A	B	H	Panel	Packing
SN-0309	3.8	7.4	8.7	3~6	100pcs
SN-0511	4.9	9.2	11	2~5	
SN-0716	7.5	12.9	16	3~6	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

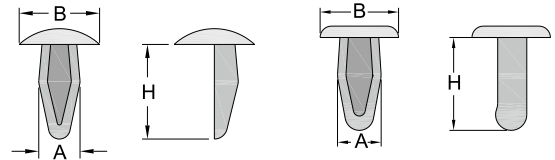

SN-0309


SN-0511, SN-0716

## SANP RIVET

Unit: mm

Part No.	A	B	Panel	Packing
SN-0305	3.1	5	5	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## SANP RIVET

Unit: mm

Part No.	A	B	H	Panel	Packing
DN-0715	6.5	11	15	1~5.5	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- POM products available




# DOOR LOCK

Unit: mm

Part No.	W1	W2	H	Packing
DR-1	8.2	10.6	14.7	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




# ROUND SPACER

Unit: mm

Part No.	A	B	C	Packing
RSP-1607	19	16.5	6.9	100pcs

- Material: PE
- Color: Natural




# ROUND SPACER

Unit: mm

Part No.	A	B	C	Packing
RSP-0203	4.0	2.1	2.5	100pcs
RSP-0508	7.5	4.6	8.0	
RSP-0510	10.0	5.4	10.0	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## ROUND SPACER

Unit: mm

Part No.	Dimension	PCB		Packing
		hole	thickness	
PH-17	As Figure	4.0	1.6	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

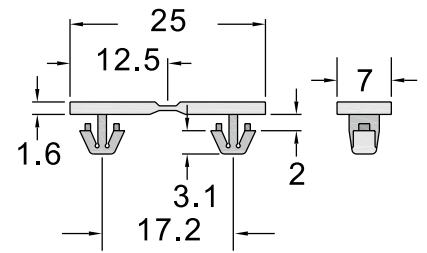




## WIRE SADDLE

Unit: mm

Part No.	Dimension				Mounting Hole	Thickness	Packing
	H	A	B	W			
JWS-0402V0	5.1	4.5	2.8	5.0	3.5	0.5~1.6	100pcs
JWS-0504V0	6.3	5.3	4.4	5.1	3.5	0.5~1.6	

- Material: UL approved Nylon66, 94V-0
- Color: White

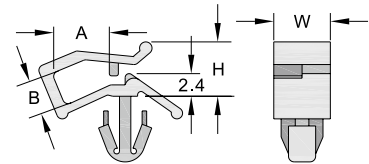


## WIRE SADDLE

Unit: mm

Part No.	Dimension				Mounting Hole	Thickness	Packing
	H	A	B	W			
JWB-0706	9.7	7.7	6.4	4.0	3.0	1.6	100pcs
JWS-0605V0	7.8	6.6	5.0	3.8	3.5	1.6	
JWS-0706V0	9.7	7.9	6.4	3.8	3.5	1.6	
JWS-0910	13.4	9.3	10.7	4.0	3.5	1.0	

- Material: JWS-0605V0, JWS-0706V0, UL approved Nylon66, 94V-0
- Color: White
- Material: JWB-0706, JWS-0910, UL approved Nylon66, 94V-2
- Color: Natural

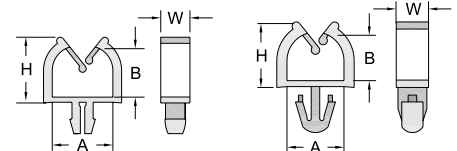

JWB-0706


JWS-0605,0706,0910

## LOCKING WIRE SADDLE

Unit: mm

Part No.	Dimension				PCB		Packing
	H	A	B	W	hole	thickness	
KWS-0	9.0	13.0	4.0	11.0	4.8	2.0	100pcs
KWS-1	14.2	19.0	10.5	11.0	4.8	2.0	
KWS-2	23.0	27.0	19.0	11.0	4.8	2.0	
KWS-2L	15.0	18.0	12.0	10.4	4.8	4.0	
KWS-3	31.1	35.8	28.0	11.0	4.8	2.0	

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural
- For directing and gathering cables at low cost. Locking into 4.8mm diameter mounting hole with fingertip pressure. Self adjust to various panel thickness.

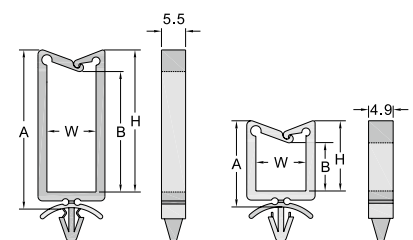

KWS-0,1,2,3


KWS-2L

# WIRE SADDLE

Unit: mm

Part No.	Dimension				PCB		Packing
	H	A	B	W	hole	thickness	
PWS-1013	13.8	17.8	10.4	4.8	4.8	2.3	100pcs
PWS-1715	15.0	16.7	23.0	5.0	4.8	2.4	

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural




# WIRE SADDLE

Unit: mm

Part No.	Dimension			PCB		Packing
	H	A	B	hole	thickness	
PWS-2824	35.3	27.6	24	4.8	2.0	100pcs

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural




# LOCKING WIRE SADDLE

Unit: mm

Part No.	Dimension	PCB		Packing
		hole	thickness	
WS-1522	As Figure	4.5	2.0	100pcs

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural




## LOCKING WIRE SADDLE

Unit: mm


Part No.	Dimension				PCB		Packing
	H	A	B	W	hole	thickness	
KWS-0N	9.2	12.7	4.0	11.0	4.8	2.0	100pcs
KWS-1N	14.8	17.9	9.6	11.0	4.8	2.0	
KWS-2N	23.4	26.9	18.2	11.0	4.8	2.0	
KWS-3N	31.3	34.8	26.2	11.0	4.8	2.0	
KWS-1114	17.8	21.2	13.7	10.7	4.8	2.4	



- Material: UL approved Nylon 66, 94V-2.
- Color: Natural
- For directing and gathering cables at low cost. Locking into 4.8mm hole with fingertip pressure.



KWS-0N,1N,2N,3N



KWS-1114


## LOCKING WIRE SADDLE

Unit: mm


Part No.	Dimension			PCB		Packing
	H	A	B	hole	thickness	
KWS-0506	5.4	5.0	9.0	4.8	3.0	100pcs
KWS-1106	5.4	10.5	13	4.8	1.6	
KWS-1110	9.8	10.9	14.4	As Figure	2.2	
KWS-1308	8.5	12.7	17.2	5.8	1.6	
KWS-1310	9.9	13	18.8	As Figure		
KWS-2314	13.6	22.9	28.3	4.8	3.4	




- Material: UL approved Nylon 66, 94V-2.
- Color: Natural




KWS-0506




KWS-1106




KWS-1110



KWS-1308



KWS-1310




KWS-2314

## EDGING WIRE SADDLE

Unit: mm

Part No.	Dimension								Packing
	A	B	C	D	L	L1	W	W1	
HL-1109	15.6	14.0	12.3	3.0	40.0	8.8	18.5	11.1	100pcs
HL-1817	23.5	21.0	21.0	3.0	56.8	16.8	25.4	18.0	

- Material: UL approved Nylon 66, 94V-2.
- Color: Black




## EDGING WIRE SADDLE

Unit: mm

Part No.	Dimension	Packing
ES-16	As Figure	100pcs

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural




## EDGING WIRE SADDLE

Unit: mm

Part No.	Dimension				Packing
	H	H1	W	W1	
ES-1207V0	12.3	7.3	19.3	11.8	100pcs

- Material: UL approved Nylon 66, 94V-0
- Color: White




## WIRE SADDLE

Unit: mm

Part No.	Dimension				Packing
	H	H1	Mounting Hole	Min Depth	
BWS-1106	13.0	5.0	7.8	8.7	100pcs
BWS-1112	18.3	10.3			
BWS-1120	27.2	19.2			
BWS-1128	35.6	27.8			



- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## N TYPE WIRE SADDLE

Unit: mm

Part No.	A	B	C	D	Packing
PCC-1	6.3	10.6	10.7	7.5	100pcs



- Material: UL approved Nylon 66, 94V-2.
- Color: Natural
- Locking into 5.6mm diameter mounting hole. Open gate to insert cable, release to close.




## WIRE SADDLE

Unit: mm

Part No.	A	B	C	D	E	Packing
TWS-3	8.4	16.3	8.8	24.8	27	100pcs



- Material: UL approved Nylon 66, 94V-2.
- Color: Natural

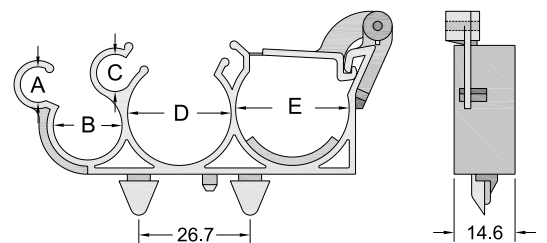


# WIRE SADDLE

Unit: mm

Part No.	Diameantion		PCB		Packing
	A	B	holp	Thickness	
RH-5	5.1	8.0	5.5	2.0	100pcs
RH-6	6.2	9.5	8.0	1.8	
RH-8	7.5	11.5	6.2	2.0	
RH-9	9.6	18.0	9.5	2.0	



- Material: UL approved Nylon 66, 94V-2.
- Color: Natural

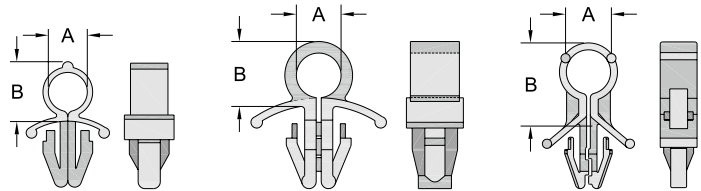

RH-5,8

RH-6

RH-9


# WIRE SADDLE

Unit: mm

Part No.	Diameantion A	PCB		Packing
		holp	Thickness	
RWS-6	6.2	6.0	2.0	100pcs
RWS-7	7.0	7.8	2.0	



- Material: UL approved Nylon 66, 94V-2.
- Color: Natural

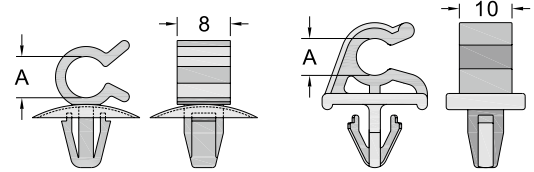

RWS-6

RWS-7


# DOUBLE ROUTING CLIP

Unit: mm

Part No.	Diameantion A	PCB		Packing
		hole	Thickness	
DR-6	As Figure	3.2	2.0	100pcs



- Material: UL approved Nylon 66, 94V-2.
- Color: Natural

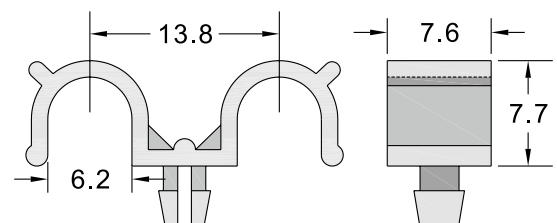


## WIRE SADDLE

Unit: mm

Part No.	Diameantion A	PCB		Packing
		holp	Thickness	
LWS-5	As Figure	4.0	2.4	100pcs

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural




## CLIP TWIST TIE

Unit: mm

Part No.	Dimension			Packing
	H1	H2	W	
CTT-17	30.5	4.2	16.7	100pcs

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural




## STANDOFF TWIST TIE

Unit: mm

Part No.	Dimension			Mounting Hole	Thickness	Packing
	H1	H2	W			
ST-1	19.5	31.7	6.0	4.6~4.8	1.0~2.8	100pcs
ST-2	27.8	21.2	11.0	4.8~5.0	1.0~2.8	
ST-3	27.3	4.7	10.4	4.6~4.8	1.0~2.8	
ST-3B	28.0	5.0	11.0	6.2~6.6	0.5~2.0	
ST-3C	32.0	5.0	15.0	4.6~4.8	0.5~1.6	
ST-3D	36.2	5.3	18.0	4.4~4.8	1.0~2.4	
ST-4S	27.9	13.0	11.0	4.2~4.8	1.0~2.4	
ST-4	31.3	13.1	15.0	4.6~4.8	1.0~2.0	
ST-0560	20.5	60.9	5.0	4.6~5.0	1.6~3.0	
ST-0605	19.3	5.3	6.1	4.0~4.4	2.4	
ST-0701	22.0	1.3	7.0	4.6~4.8	1.0~2.8	
ST-1112	26.8	15.3	11.0	4.6~4.8	1.6~3.0	
ST-1247	27.2	50.5	11.0	4.6~4.8	1.6~3.0	
ST-1303	45.0	3.0	13.5	6.6	1.8~3.6	
ST-1602	31.7	5.1	16.0	4.4~4.6	0.5~1.6	
ST-2005	36.5	5.1	20.0	7.2~7.6	1.8~3.6	
ST-2403	44.2	3.2	23.5	4.8~5.0	0.5~2.6	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Locking into pre-drilled hole, Insert cables and twist on to fix.

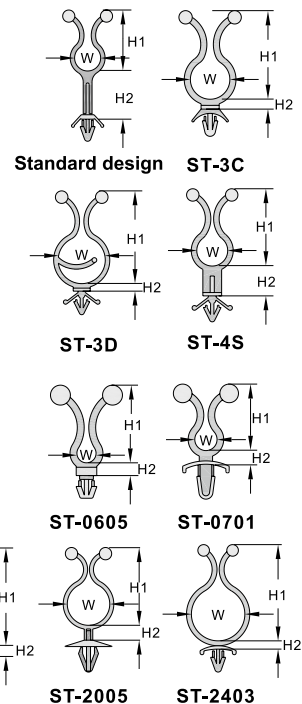


# WIRE SADDLE

Unit: mm

Part No.	Dimension				PCB		Packing
	A	B	C	D	hole	Thickness	
RCS-4	4.0	5.0	2.2	2.7	4.0	2.4	100pcs

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural




# PURSE LOCK TWIST TIE

Unit: mm

Part No.	Dimension			Packing
	A	B	C	
PL-8	8.0	8.0	18	100pcs
PL-0740	7.5	7.5	40	

- Material: UL approved Nylon 66, 94V-2.
- Color: Black

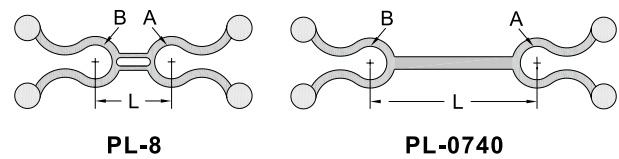


# TWIST TIE

Unit: mm

Part No.	Dimension			Bundle Diameter	Packing
	A	B	C		
TT-05	5.1	21.6	1.5	4.4	100PCS
TT-08	7.0	25.0	2.0	7.0	
TT-11	11.6	29.8	1.7	10.1	
TT-15	15.0	33.8	1.9	13.4	
TT-18	18.6	40.0	1.9	16.2	
TT-24	23.6	45.0	2.0	21.3	
TTU-05	5.0	22.0	1.8	4.2	
TTU-08	8.1	26.2	2.3	7.2	
TTU-11	11.3	29.7	2.3	10.0	
TTU-15	14.8	32.6	2.0	13.2	
TTU-18	18.0	38.0	2.0	16.5	
TTU-22	22.0	42.3	2.0	19.8	
TTU-28	28.0	55.1	2.0	26.7	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- Colors available upon request.
- Tie-up cables at economical cost.
- Insert cables and twist on to fix.

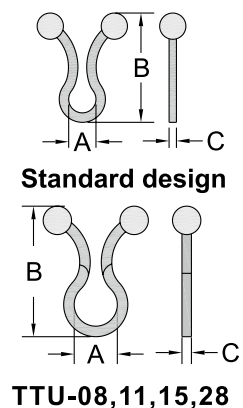


## MOUNTING TWIST TIE

Unit: mm

Part No.	A	B	C	Bundls Diameter	Packing
TTB-08	7.9	27.5	17.4	7-10	100pcs
TTB-15	14.8	35.2	22.0	10-15	
TTB-20	20.6	40.0	25.5	15-20	



- Material: UL approved Nylon 66, 94V-2(Backed with adhesive tape)
- Color: Natural
- Peel off adhesive paper before usage, insert cables and twist on to fix.




## ADHESIVE WIRE SADDLE

Unit: mm

Part No.	A	B	C	D	Packing
AWS-11	11.2	11.0	20.0	19.8	100pcs
AWS-9R	8.5	13.6	29.8	16.0	
AWS-1210	11.3	10	20.7	18.3	
AWS-0912	9.0	11.6	15.8	9.5	



- Material: UL approved Nylon 66, 94V-2 (Backed with adhesive tape)
- Color: Natural

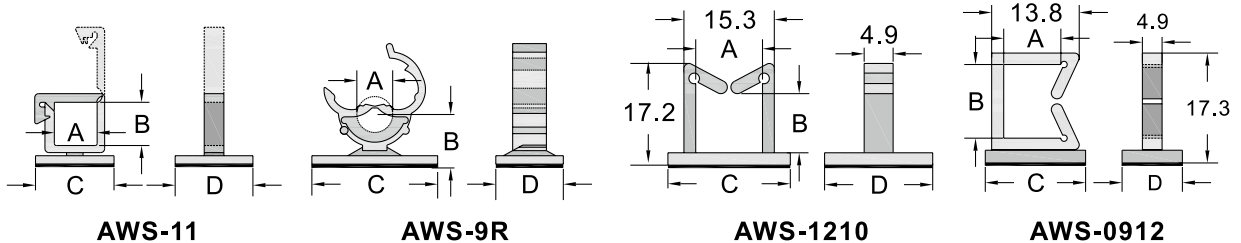


## SPACERS RING

Unit: mm

Part No.	D	H1	H2	Packing
SPR-8V0	28.0	14.2		100pcs
SPR-45V0	49.2	26.3	22.0	



- Material: UL approved Nylon 66, 94V-0
- Color: White

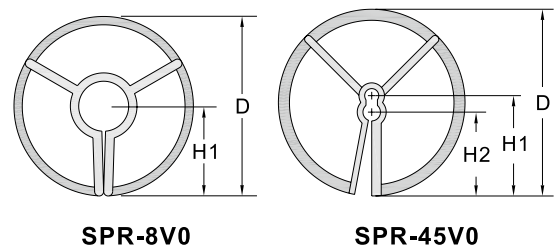


# TRANSISTOR HOUSING

Unit: mm

Part No.	Dimension	Packing
TH-1V0	As Figure	100pcs

- Material: UL approved Nylon 66, 94V-0
- Color: Black
- To protect transistors from electric short circuit and good for thermal control.




# TRANSISTOR HOUSING

Unit: mm

Part No.	A	B	C	D	Packing
THR-2	5	10.1	2.8	4	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




# TRANSISTOR COVER

Unit: mm

Part No.	A	Packing
TH-2V0	As Figure	100pcs
TH-3V0	As Figure	

- Material: UL approved Nylon 66, 94V-0
- Color: White
- To protect transistor legs from short circuit or breaking.

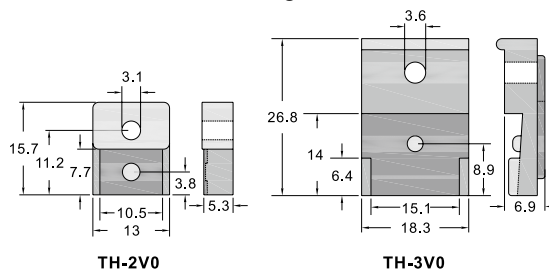


# NTC THERMISTOR HOUSING

Unit: mm

Part No.	A	B	C	Packing
TRH-7V0	16.5	7.5	5.1	100pcs

- Material: UL approved Nylon 66, 94V-0
- Color: White




## TRANSISTOR HOUSING

Unit: mm

Part No.	A	B	Packing
TR-3	2.1	1.1	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## WASHER

Unit: mm

Part No.	Dimension	Packing
WR-3207	As Figure	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural





## WASHER

Unit: mm

Part No.	A	B	C	Packing
WR-0503	4.5	2.5	0.8	100pcs
WR-0603	6.0	3.0	0.8	
WR-0803	8.0	3.2	1.0	
WR-0904	9.0	4.3	0.8	
WR-1005	10.0	5.3	1.0	
WR-1206	12.0	6.4	1.5	
WR-1208	12.0	8.0	1.5	
※WR-2011RU	20.0	10.6	2.0	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural
- ※ WR-2011RU Material: TPE (Thermoplastic Elastomer) (Black)

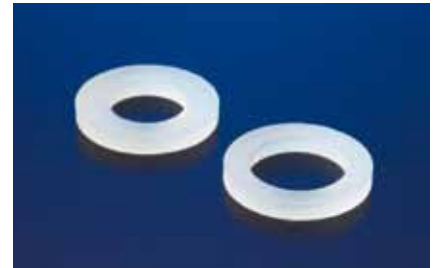


## HEADBOARD WASHER

Unit: mm

Part No.	A	B	C	Packing
HBW-1808	18	8.6	11.7	100pcs

- Material: PE
- Color: Natural




# ROUND WASHER

Unit: mm

Part No.	A	B	C	D	E	Packing
RW-45	4.5	4.0	8.0	6.5	3.1	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

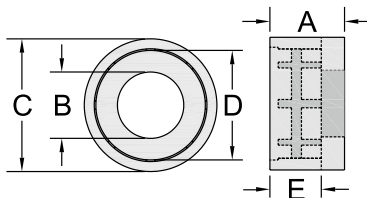


# CONOID WASHER

Unit: mm

Part No.	A	B	C	D	E	Packing
CDW-12	12.2	3.3	6.9	8.3	10.7	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

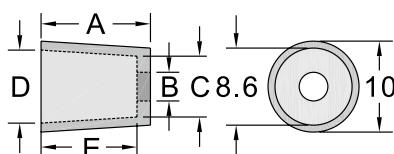


# TRANSISTOR WASHER

Unit: mm

Part No.	A	B	C	D	E	Packing
TW-63A	6.0	8.1	0.5	3.5	2.8	100pcs
TW-6.B	6.0	1.4	1.2	3.5	2.9	
TW-63C	6.0	2.3	1.7	3.5	2.9	
TW-63D	6.0	3.2	1.9	3.5	2.9	
TW-63E	6.1	2.6	2.0	3.5	2.9	
TW-63F	6.3	2.0	1.3	3.4	2.9	
TW-73A	6.6	1.8	3.0	4.2	3.2	
TW-73B	6.9	2.5	1.3	3.6	2.9	
TW-83A	7.7	3.7	1.3	5.8	3.1	
TW-83B	7.8	5.6	1.2	3.6	2.9	
TW-83C	7.8	0.9	2.0	4.3	3.2	
TW-83D	8.0	2.3	1.3	3.5	2.9	
TW-83E	7.8	1.2	3.7	5.9	3.2	
TW-123ABK (BLACK)	12.0	3.0	0.5	5.9	3.2	
TW-133A	12.7	1.7	1.5	7.9	3.7	
TW-163A	16.0	2.0	1.5	6.0	3.2	
TW-189A	18.0	1.5	3.3	12.4	9.3	

- Material: UL approved Nylon 66, 94V-2.
- Color: Natural
- ※ TW-123ABK Black color.




## TRANSISTOR WASHER

Unit: mm

Part No.	A	B	Packing
TRW-3	5.7	3.0	100pcs
TRW-5	8.9	4.6	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

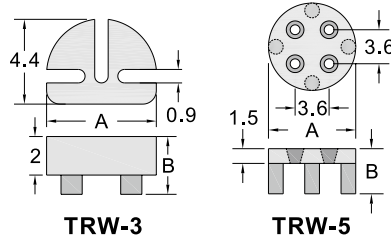


## LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	B	C	D	E	F	
LE-3	3.1	3.6	1.0	1.2	7.2	3.6	100pcs
LE-6	6.0	3.6	1.0	1.2	7.1	3.9	
LE-13	12.9	4.0	1.0	1.4	6.0	3.9	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

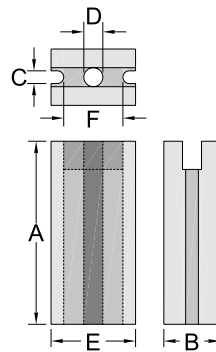


FASTENERS

## LED HOLDER

Unit: mm

Part No.	A	Packing
LK-5	5	100pcs
LK-18	18	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural


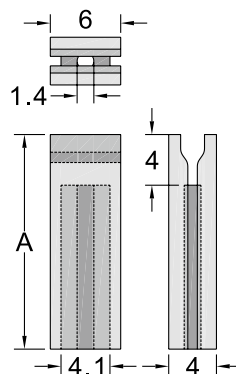


## LED HOLDER

Unit: mm

Part No.	A	B	Packing
LX-3	3	5	100pcs
LX-6	6	5	
LX-12	12	5	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

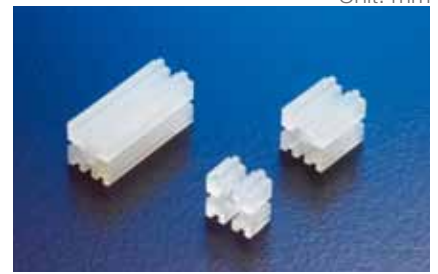


## LED HOLDER

Unit: mm

Part No.	A	B	Packing
LQT-3	3.1	6.6	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## LED HOLDER

Unit: mm

Part No.	A	Packing
LQ-2	2.6	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## LED HOLDER

Unit: mm

Part No.	Dimension			Packing
	A	B	C	
LDT-17	17.2	4.7	5.7	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural



To fit hole




## LED HOLDER

Unit: mm

Part No.	Dimension		Packing
	A	LED	
LD3-6	6.1	3Ø 2PIN	100pcs
LD3-9	9.0		
LD3-12	12.0		
LD3-16	16.0		
LD3-19	19.0		



- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## LED HOLDER

Unit: mm

Part No.	A	Packing
LY-14	14.1	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




## LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LG3-12	12	7.1	3.6	7.5	15.8	5Ø3PIN	100pcs
LG3-18	17.5	7.1	3.7	7.5	21.6	5Ø3PIN	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

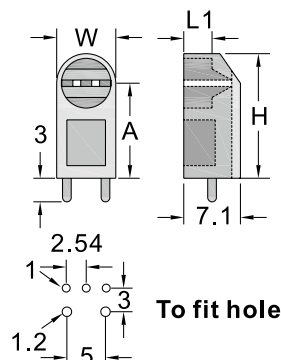


# LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LG-8	7.8	5.6	3.1	5.5	10.8	3Ø2PIN	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

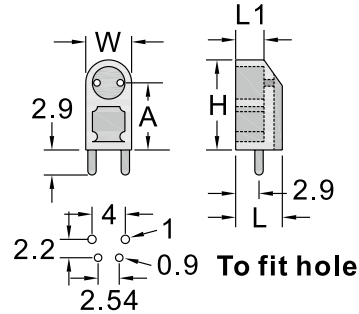


# LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LH-4	4.5	5.6	=	5.4	7.2	5Ø2PIN	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




# LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LHN-10	10	5.6	=	5.5	12.8	5Ø2PIN	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

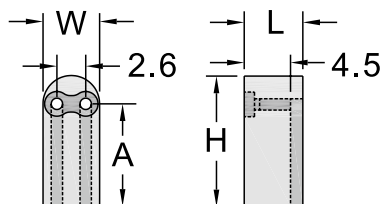


## LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
PLU-9	9	10.2	3.5	8	13.1	5Ø3PIN	100pcs

● Material: UL approved Nylon 66, 94V-2

● Color: Natural

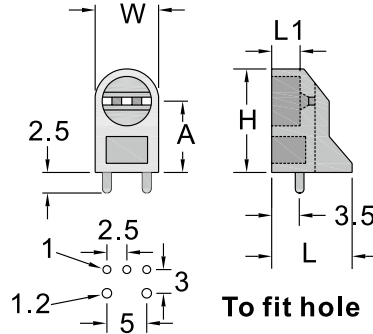


## LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LHK-3	2.7	6	1	7.6	6	5Ø3PIN	100pcs

● Material: UL approved Nylon 66, 94V-2

● Color: Natural

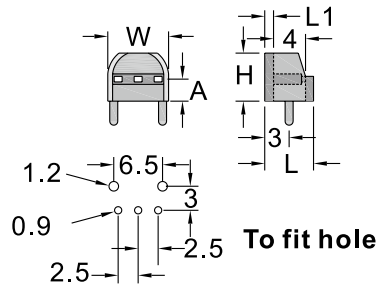


## LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
PLK-5	4.7	8.2	6.0	7.6	9	5Ø3PIN	100pcs

● Material: UL approved Nylon 66, 94V-2

● Color: Natural




# LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
PLM-16	16	6.7	3.4	5.1	18.7	3Ø2PIN	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




# LED HOLDER

Unit: mm

Part No.	Dimension					Packing
	A	L	W	H	LED	
PLX-18	18.2	7.7	9.6	21.6	5Ø2PIN	100pcs
PLW-18	18.2	9.7	9.0	21.6	5Ø3PIN	

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

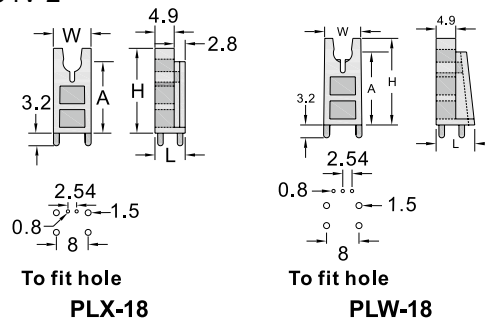


# LED HOLDER

Unit: mm

Part No.	Dimension									Packing
	A	A1	L	L1	W	H	P1	P2	LED	
PLD1-3A	5.05	=	6.5	2	4.7	7.5	4.65	=	3Ø2PIN	100pcs
PLD2-3A	2.8	5	9.2	2.8	4.5	10	4.9	7.2	3Ø2PIN	
PLD2-3B	2.6	5	8.2	2.6	4.8	9.9	4.8	7.2	3Ø2PIN	
PLD2-5C	2.95	6.3	11.2	4.5	5.9	12.2	5.6	7.7	5Ø2PIN	
PLD4-3A	2.6	5	10.2	1	10.2	10.2	6.4	9.2	3Ø2PIN	
PLD4-3B	5.6	=	20.4	4.4	22.7	9.0	15	=	3Ø2PIN	

- Material: UL approved Nylon 66, 94V-2
- Color: Black


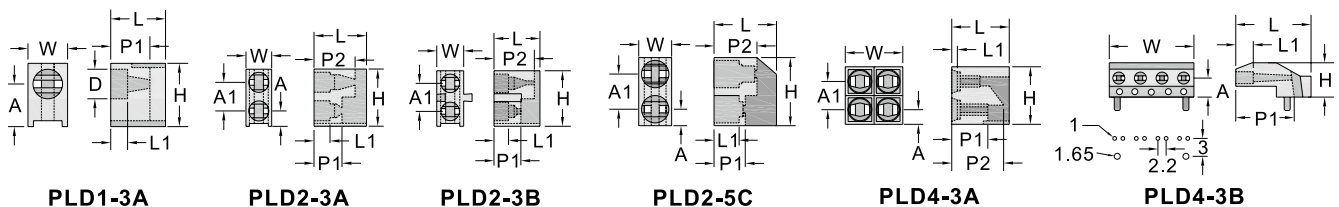


## LED HOLDER

Unit: mm

Part No.	Dimension									Packing
	A	A1	L	L1	W	H	P1	P2	LED	
PLT-4	3.7	=	6.7	=	6.7	7	3.1	=	5Ø2PIN	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural

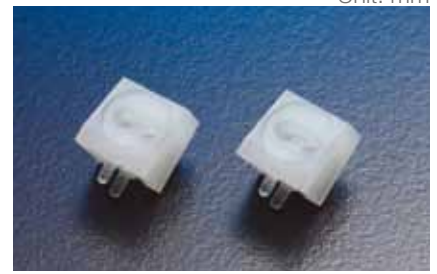



## LED HOLDER

Unit: mm

Part No.	Dimension									Packing
	A	A1	L	L1	W	H	P1	P2	LED	
PLR-4	4	=	11	1.2	7.7	8	5.8	8	5Ø3PIN	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Black

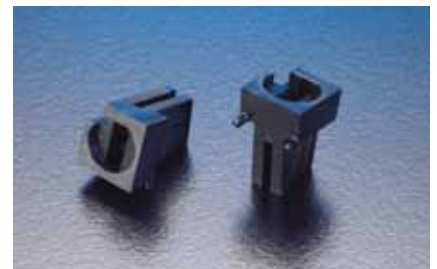


## LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	L	L1	D1	D2	T	LED	
PCL-5A	7.2	4.5	6.2	7.8	1.5	5Ø	100pcs
PCL-3H	5.2	3.2	4.8	5.5	1.2	3Ø	

- Material: UL approved Nylon 66, 94V-2
- Color: Black

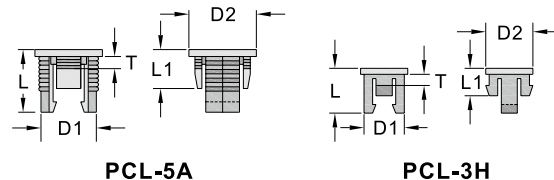


## CAPACITOR HOUSING

Unit: mm



Part No.	Dimension			Packing
	A	B	C	
CAP-10	12.5	10.4	9.5	100pcs

- Material: UL approved Nylon 66, 94V-2
- Color: Natural




# PLASTIC FASTENERS

Unit: mm


	Part No.		A	B	C	D	Packing	
	PC	NYLON						
SCREW 		PF-205NK	M2x0.4	5	1.6	4.5	1000pcs	
		PF-208NK		8				
		PF-210NK		10				
		PF-306K	PF-306NK	M3x0.5	6	2.5		5.25
		PF-308K	PF-308NK		8			
		PF-310K	PF-310NK		10			
		PF-312K	PF-312NK		12			
		PF-408K	PF-408NK	M4x0.7	8	2.6		7.5
		PF-410K	PF-410NK		10			
		PF-412K	PF-412NK		12			
		PF-414K	PF-414NK		14			
		PF-420K	PF-420NK		20			
		PF-425K	PF-425NK	M5x0.8	25	3.5		8.7
		PF-520K	PF-520NK		20			
		PF-530K	PF-530NK		30			
		PF-540K	PF-540NK	M6x1.0	40	4.0		10
	PF-620K	PF-620NK	20					
	PF-630K	PF-630NK	30					
	PF-640K	PF-640NK	40					
NUT 		PN-2NK	M2x0.4	4.5	1.5	4.0	1000pcs	
		PN-3K	PN-3NK	M3x0.5	6.4	2.7		5.6
		PN-4K	PN-4NK	M4x0.7	8.1	3.2		7.0
		PN-5K	PN-5NK	M5x0.8	9.2	4.0		8.0
		PN-6K	PN-6NK	M6x1.0	11.5	5.0		10.0





- Material: PC (POLYCARBONATE) -Transparent or Nylon 66.
- For better insulation, light weight, no rust.
- Used extensively as metal screw but where insulation is needed. Good for computer or electronics equipment fixation.
- For Nylon 66, Add "N" to Item No.





- Material: Nylon 66, 94V-2
- Color: Natural
- For better insulation, light weight, no rust.
- Used extensively as metal screw but where insulation is needed. Good for computer or electronics equipment fixation.




	Part No.	A	B	C	D	Packing
SCREW 	PF-820N	M8x1.25	20	5.4	12.8	NYLON 100 pcs
	PF-830N		30			
	PF-840N		40			
	PF-1030SN	M10x1.5	30	5.5	13.6	
	PF-1030N		30			
	PF-1040SN		40			
	PF-1040N		40			
NUT 	PN-8N	M8x1.25	14.5	6.4	12.8	
	PN-10N	M10x1.5	19.2	8.0	16.7	



	Part No.	A	B	C	D	Packing
SCREW 	PF-823HN	Natural	M8x1.25	22.5	5.5	15.8
	PF-823HNGYJ	Grey				
NUT 	PN-8HN	Natural	M8x1.25	14.6	10	12.8
	PN-8HNGYJ	Grey				

- Material: Nylon 66, 94V-2
- Color: Grey



## MODULAR PLUG & PLUG COVER

### Modular Plug

Unit: mm

Part No.	Explanation	Packing
RJ45-8A2	Suit for network cable Cat5, Cat5e	100pcs/ Bag
RJ45-8A3	Suit for network cable Cat5, Cat5e	
RJ45-8C6	Suit for network cable Cat6	
RJ45-8C6A	Suit for network cable Cat6, protected by metal shield	



- Design for Cat5, Cat5e, Cat6 cables standard, gilded design for better connection.

### Modular Plug Cover

Part No.	Color	Packing
RJ45-60GN	Green Plug Cover	100pcs/ Bag
RJ45-60GY	Gray Plug Cover	
RJ45-60RD	Red Plug Cover	
RJ45-60YW	Yellow Plug Cover	
RJ45-60BE	Blue Plug Cover	
RJ45-60BK	Black Plug Cover	

- Design for Cat5, Cat5e, Cat6 cables plug cover, to prevent dust.


## U CONNECTOR

Part No.	mm	Packing
RJ45-DC1	As Figure	100pcs

- Material: Soft PVC
- Color: Black, available in natural or other colors.
- Function: Dust cover for RJ45 plug.



Unit: mm



## U CONNECTOR

Part No.	mm	AWG	Packing
UY	1.52	22~26	100pcs
UY2	2.08	19~26	

- Specialty: Conduct the circuit without peeling the wire ; also achieve at least UL Category 5's transmission result.



Unit: mm


BANDEX Cable Accessories

# COPPER LUGS AND TERMINALS




## BANDEX NOW OFFERS YOU FREEDOM OF CHOICE

- A** Non-insulated terminals (Non Ins Style)
- B** Insulated terminals with P.V.C. (vinyl) (Pre-Ins Style)
- C** Insulated terminals with extra copper sleeve (Double Grip Style)

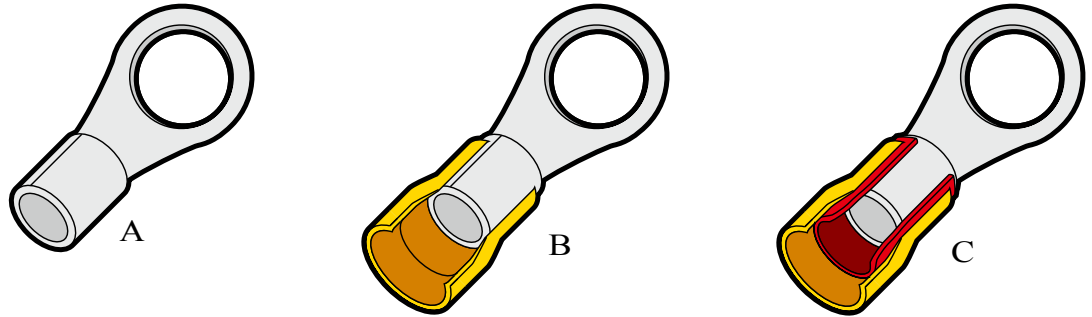

## R-TYPE TERMINAL (continued)


• Terminal material: Copper

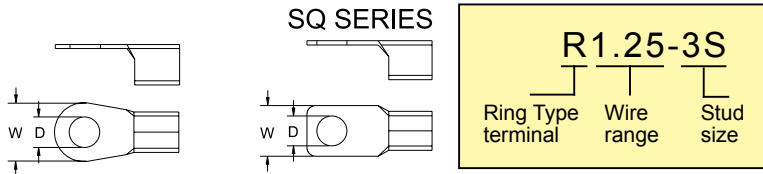


Part No.	Stud Size	Width W(mm)	WIRE SIZE		Part No.	Stud Size	Width W(mm)	WIRE SIZE			
	D(mm)		AWG	DIN mm <sup>2</sup>		D(mm)		AWG	DIN mm <sup>2</sup>		
R1.25-3S	3.2	5.5	22-16	0.5-1.0	R8-4	4.3	12.0	8	10		
R1.25-3	3.7	5.5			R8-5S	5.3	9.0				
R1.25-4	4.3	8.0			R8-5	5.3	12.0				
R1.25-4M	4.3	6.6			R8-6	6.4	12.0				
R1.25-5	5.3	8.0			R8-8	8.4	15.0				
R1.25-6	6.4	11.7			R8-10	10.5	15.0				
R1.25-8	8.4	11.7			R8-12	13.0	20.0				
R1.25-10	10.5	13.7			R14-5	5.3	9.5	6	16		
R2-3S	3.2	6.5			16-14	1.5-2.5	R14-6			6.4	12.0
R2-3	3.7	6.5					R14-8			8.4	16.0
R2-4	4.3	8.5	R14-10	10.5			16.0				
R2-4M	4.3	6.6	R14-12	13.0			22.0				
R2-5	5.3	9.5	R22-6S	6.4			13.0	4	25		
R2-6	6.4	12.0	R22-6	6.4			16.0				
R2-8	8.4	12.0	R22-8S	8.4			13.0				
R2-10	10.5	13.6	R22-8	8.4			16.5				
R3.5-4	4.3	8.0	R22-10	10.5			16.5				
R3.5-5	5.3	8.0	R22-12	13.0			22.0				
R3.5-6	6.4	12.0	14-12	2.5-4	R30-8	8.4	16.5	2	35		
R3.5-8	8.4	15.0			R30-10	10.5	16.5				
R3.5-10	10.5	15.0			R38-6S	6.4	15.0				
R5.5-4	4.3	9.5			R38-6ST	6.4	15.3				
R5.5-5	5.3	9.5	12-10	4-6	R38-6T	6.4	22.0				
R5.5-6S	6.4	12.0			R38-8S	8.4	15.0				
R5.5-6	6.4	12.0			R38-8ST	8.4	15.3				
R5.5-8	8.4	15.0			R38-8	8.4	18.5				
R5.5-10	10.5	15.0			R38-8T	8.4	22.0				
R5.5-12	13.0	19.3			R38-10S	10.5	15.0				

# R-TYPE TERMINAL (continued)

• Terminal material: Copper

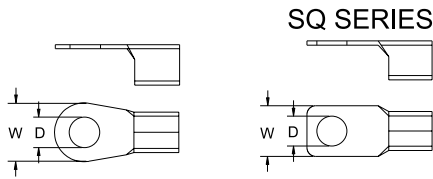


SQ SERIES



Part No.	Stud Size	Width	WIRE SIZE		Part No.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>		D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>
R38-10ST	10.5	15.3	2	35	R150-20L	21.0	36.5	250/300 mcm	150
R38-10	10.5	18.5			R150-22L	23.0	36.5		
R38-10T	10.5	22.0			R150-24L	25.0	36.5		
R38-12	13.0	18.5			R180-12SQ	13.0	28.0	400 mcm	240
R38-12T	13.0	22.0	R180-16SQ	17.0	28.0				
R50-8SQ	8.4	16.0	R180-16L	17.0	39.0				
R50-10SQ	10.5	16.0	R180-20L	21.0	39.0				
R50-12	13.0	19.0	R180-22L	23.0	39.0				
R60-8	8.4	19.0	R180-24L	25.0	39.0				
R60-8SQ	8.4	17.3	R200-10	10.5	44.0				
R60-10	10.5	19.0	R200-10SQ	10.5	32.7				
R60-10SQ	10.5	17.3	R200-12	13.0	44.0				
R60-12	13.0	19.0	R200-12SQ	13.0	32.7				
R60-16L	17.0	32.0	R200-16	17.0	44.0	400 mcm	240		
R60-20L	21.0	32.0	R200-16SQ	17.0	32.7				
R80-8	8.4	22.0	R200-16L	17.0	44.0				
R80-8SQ	8.4	18.9	R200-20L	21.0	44.0				
R80-10	10.5	22.0	R200-22L	23.0	44.0				
R80-10SQ	10.5	18.9	R200-24L	25.0	44.0				
R80-12	13.0	22.0	R200-27L	28.0	44.0				
R80-12SQ	13.0	18.9	R250-10	10.5	44.0			400 mcm	240
R80-16L	17.0	32.0	R250-10SQ	10.5	32.7				
R80-20L	21.0	32.0	R250-12	13.0	44.0				
R80-22L	23.0	32.0	R250-12SQ	13.0	32.7				
R100-8	8.4	28.5	R250-16	17.0	44.0				
R100-8SQ	8.4	23.0	R250-16SQ	17.0	32.7				
R100-10	10.5	28.5	R250-16L	17.0	44.0				
R100-10SQ	10.5	23.0	R250-20L	21.0	44.0				
R100-12	13.0	28.5	R250-22L	23.0	44.0				
R100-12SQ	13.0	23.0	R250-24L	25.0	44.0				
R100-16L	17.0	32.2	R250-27L	28.0	44.0	500/600 mcm	300		
R100-20L	21.0	32.2	R325-10	10.5	51.0				
R100-22L	23.0	32.2	R325-10SQ	10.5	38.4				
R125-8SQ	8.4	23.0	R325-12	13.0	51.0				
R125-10SQ	10.5	23.0	R325-12SQ	13.0	38.4				
R125-12SQ	13.0	23.0	R325-16	17.0	51.0				
R150-10	10.5	36.5	R325-16SQ	17.0	38.4				
R150-10SQ	10.5	25.0	R325-16L	17.0	51.0				
R150-12	13.0	36.5	R325-20L	21.0	51.0				
R150-12SQ	13.0	25.0	R325-22L	23.0	51.0				
R150-16	17.0	36.5	R325-24L	25.0	51.0				
R150-16SQ	17.0	25.0	R325-27L	28.0	51.0				
R150-16L	17.0	36.5							

## Y-TYPE TERMINAL (continued)

• Terminal material: Copper

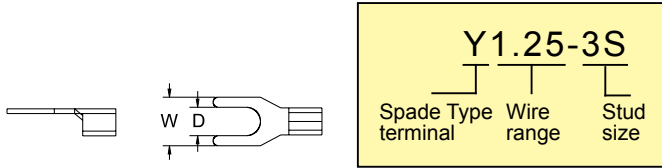

Part No.	Stud Size	Width	WIRE SIZE		Part No.	Stud Size	Width	WIRE SIZE			
	D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>		D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>		
Y1.25-3S	3.7	5.7	22-16	0.5-1.0	Y3.5-4	4.3	8.0	14-12	2.5-4		
Y1.25-3	3.7	6.2			Y3.5-5	5.3	8.0				
Y1.25-4	4.3	7.2			16-14	1.5-2.5	Y5.5-3S	3.7	7.2	12-10	4-6
Y1.25-4S	4.3	6.4					Y5.5-3	3.7	8.2		
Y1.25-5	5.3	8.0					Y5.5-4S	4.3	7.2		
Y1.25-6	6.3	9.7					Y5.5-4	4.3	8.2		
Y2-3S	3.7	5.7	Y5.5-5	5.3			9.0				
Y2-3	3.7	6.2	Y5.5-6	6.4			12.0				
Y2-4S	4.2	6.5	14-12	2.5-4	Y8-4	4.3	8.2	8	10		
Y2-4	4.3	7.2			Y8-5	5.3	9.0				
Y2-5	5.3	8.0			Y8-6	6.4	12.0				
Y2-6	6.4	10.7			Y14-6	6.4	12.0			6	16
Y3.5-3S	3.7	6.4	14-12	2.5-4	Y22-8	8.4	13.0	4	25		
Y3.5-3	3.7	7.4									

## RING TERMINAL


Terminal material: Copper  
Insulation material: Vinyl



Part No.	Stud Size	Width	WIRE SIZE		Part No.	Stud Size	Width	WIRE SIZE			
	D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>		D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>		
RF1.25-3S	3.2	5.5	22-16	0.5-1.0	RF3.5-6	6.4	12	14-12	2.5-4		
RF1.25-3	3.7	5.5			RF3.5-8	8.4	15				
RF1.25-4	4.3	8			16-14	1.5-2.5	RF3.5-10	10.5	15	12-10	4-6
RF1.25-4M	4.3	6.6					RF5.5-3	3.7	9.4		
RF1.25-5	5.3	8					RF5.5-4	4.3	9.5		
RF1.25-6	6.4	11.7					RF5.5-5	5.3	9.5		
RF1.25-8	8.4	11.7	RF5.5-6	6.4			12				
RF1.25-10	10.5	13.7	RF5.5-6S	6.4			12				
RF2-3S	3.7	6.5	14-12	2.5-4	RF5.5-8S	8.4	12	8	10		
RF2-3	3.7	6.5			RF5.5-8	8.4	15				
RF2-4	4.3	8.5			RF5.5-10	10.5	15				
RF2-4M	4.3	6.6			RF5.5-12	13	19.25				
RF2-5	5.3	9.5			RF8-4	4.3	12				
RF2-6	6.4	12			RF8-5S	5.3	9				
RF2-8	8.4	12			RF8-5	5.3	12				
RF2-10	10.5	13.7			RF8-6	6.4	12				
RF3.5-4	4.3	8			RF8-8	8.4	15				
RF3.5-5	5.3	8			RF8-10	10.5	15				

# SPADE TERMINAL


Terminal material: Copper  
Insulation material: Vinyl



Part No.	Stud Size	Width	WIRE SIZE		Part No.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>		D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>
YF1.25-3S	3.7	5.7	22-16	0.5-1.0	YF3.5-3	3.7	7.4	14-12	2.4-4
YF1.25-3	3.7	6.2			YF3.5-4	4.3	8		
YF1.25-4S	4.3	6.4			YF3.5-5	5.3	8		
YF1.25-4	4.3	7.2			YF5.5-3S	3.7	7.2	12-10	4-6
YF1.25-5	5.3	8			YF5.5-3	3.7	8.2		
YF1.25-6	6.3	9.7			YF5.5-4S	4.3	7.2		
YF2-3S	3.7	5.7	YF5.5-4	4.3	8.2				
YF2-3	3.7	6.2	YF5.5-5	5.3	9				
YF2-4S	4.3	6.5	YF5.5-6	6.4	12				
YF2-4	4.3	7.2	16-14	1.5-2.5	YF8-4	4.3	8.2	8	10
YF2-5	5.3	8			YF8-5	5.3	9		
YF2-6	6.4	10.7			YF8-6	6.4	12		
YF3.5-3S	3.7	6.4			14-12	2.4-4			

# INSULATED RING TERMINAL EASY ENTRY

Terminal material: Copper  
Insulation material: Vinyl



Part No.	Stud Size	Width	WIRE SIZE		Part No.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>		D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>
ERF1.25-3S	3.2	5.5	22-18	0.5-1.0	ERF2-4M	4.3	6.6	16-14	1.5-2.5
ERF1.25-3	3.7	5.5			ERF2-5	5.3	9.5		
ERF1.25-4	4.3	8			ERF2-6	6.4	11.6		
ERF1.25-4M	4.3	6.6			ERF2-8	8.4	11.6	12-10	4-6
ERF1.25-5	5.3	8			ERF2-10	10.5	13.6		
ERF1.25-6	6.4	11.6			ERF5.5-4	4.3	9.5		
ERF1.25-8	8.4	11.6	ERF5.5-5	5.3	9.5				
ERF1.25-10	10.5	13.6	ERF5.5-6S	6.4	12				
ERF2-3S	3.2	5.5	16-14	1.5-2.5	ERF5.5-8	8.4	15		
ERF2-3	3.7	8.5			ERF5.5-10	10.5	15		
ERF2-4	4.3	8.5							

INSULATED COLOR	
RED:	1.25 mm <sup>2</sup> = AWG22-16
BLUE:	2.0 mm <sup>2</sup> = AWG16-14
BLACK:	3.5 mm <sup>2</sup> = AWG14-12
YELLOW:	5.5 mm <sup>2</sup> = AWG12-10
WELCOME FOR SPECIAL COLOR REQUEST	


STUD SIZE	
mm - inch	mm - inch
3.2 - #4	6.4 - 1/4"
3.7 - #6	8.4 - 5/16"
4.3 - #8	10.5 - 3/8"
5.3 - #10	13.0 - 1/2"

**ERF 1.25-3S**

**EYF 1.25-3S**

## INSULATED Y TERMINAL EASY ENTRY

Terminal material: Copper  
Insulation material: Vinyl




Part No.	Stud Size	Width	WIRE SIZE		Part No.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>		D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>
EYF1.25-3S	3.7	5.7	22-18	0.5-1.0	EYF2-4	4.3	7.2	16-14	1.5-2.5
EYF1.25-3	3.7	6.2			EYF2-5	5.3	8		
EYF1.25-4S	4.3	6.4			EYF2-6	6.4	10.7		
EYF1.25-4	4.3	7.2			EYF5.5-3S	3.7	7.2	12-10	4-6
EYF1.25-5	5.3	8			EYF5.5-3	3.7	8.2		
EYF1.25-6	6.4	10.7			EYF5.5-4S	4.3	7.2		
EYF2-3S	3.7	5.7	EYF5.5-4	4.3	8.2				
EYF2-3	3.7	6.2	EYF5.5-5	5.3	9				
EYF2-4S	4.3	6.4	16-14	1.5-2.5	EYF5.5-6	6.4	10.8		

## INSULATED HOOK TERMINAL

Part No.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>
HF1-4	4.3	8.0	22-16	0.5-1.0
HF1-5	5.3	8.0		
HF2-4	4.3	8.5	16-14	1.5-2.5
HF2-5	5.3	9.5		
HF5-4	4.3	9.5	12-10	4-6
HF5-5	5.3	9.5		



Terminal material: Copper  
Insulation material: Vinyl




## HOOK TERMINAL

Part No.	Stud Size	Width	WIRE SIZE	
	D(mm)	W(mm)	AWG	DIN mm <sup>2</sup>
H1-4	4.3	8.0	22-16	0.5-1.0
H1-5	5.3	8.0		
H2-4	4.3	8.5	16-14	1.5-2.5
H2-5	5.3	9.5		
H5-4	4.3	9.5	12-10	4-6
H5-5	5.3	9.5		





Terminal material: Copper



## FEMALE LUG COVER

Part No.	W(mm)	H(mm)	L(mm)
CLV1-3A	5.2	5	20.2
CLV1-5A	7.3	6.1	21.5
CLV1-7A	9.6	6.3	25.2


Insulation material: Nylon

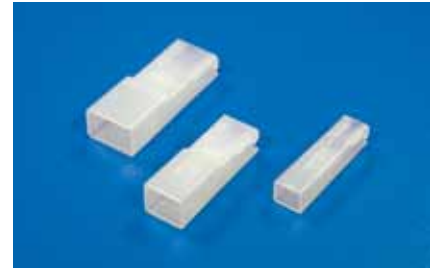

## FLANGED SPADE TERMINAL

Part No.	Stud Size	DIMENSION		WIRE SIZE	
	D(mm)	W(mm)	T(mm)	AWG	DIN mm <sup>2</sup>
LY1-3	3.7	7.5	1.5	22-16	0.5-1.0
LY1-4	4.3	7.5	1.5		
LY1-5	5.3	7.5	1.5		
LY2-3	3.7	7.5	1.5	16-14	1.5-2.5
LY2-4	4.3	7.5	1.5		
LY2-5	5.3	7.5	1.5		
LY5-3	3.7	8.5	1.5	12-10	4-6
LY5-4	4.3	8.5	1.5		
LY5-5	5.3	8.5	1.5		


Terminal material: Copper



## FLANGED SPADE INSULATED TERMINAL

Part No.	Stud Size	DIMENSION		WIRE SIZE	
	D(mm)	W(mm)	T(mm)	AWG	DIN mm <sup>2</sup>
LYF1-3	3.7	7.5	1.5	22-16	0.5-1.0
LYF1-4	4.3	7.5	1.5		
LYF1-5	5.3	7.5	1.5		
LYF2-3	3.7	7.5	1.5	16-14	1.5-2.5
LYF2-4	4.3	7.5	1.5		
LYF2-5	5.3	7.5	1.5		
LYF5-3	3.7	8.5	1.5	12-10	4-6
LYF5-4	4.3	8.5	1.5		
LYF5-5	5.3	8.5	1.5		


Terminal material: Copper  
Insulation material: Vinyl



## BULLET TERMINAL-MALE

Part No.	Width	WIRE SIZE	
	W(mm)	AWG	DIN mm <sup>2</sup>
F1.25-B	4.0	22-16	0.5-1.0
F2-B	4.0	16-14	1.5-2.5
F2-B5	5.0		
F5.5-B	5.0	12-10	4-6


Terminal material: Brass  
Insulation material: Vinyl



## PIN TERMINAL

Part No.	Stud Size	Width	WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm <sup>2</sup>
PIN-1.25	1.9	12	22-16	0.5-1.0
PIN-2	1.9	12	16-14	1.5-2.5
PIN-5.5	2.7	14	12-10	4-6


Terminal material: Copper



## PIN INSULATED TERMINAL

Part No.	Stud Size	Width	WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm <sup>2</sup>
PIN-1.25-AF	1.9	12	22-16	0.5-1.0
PIN-2-AF	1.9	12	16-14	1.5-2.5
PIN-5.5-AF	2.7	14	12-10	4-6


Terminal material: Copper  
Insulation material: Vinyl



## PIN INSULATED TERMINAL EASY ENTRY

Part No.	Stud Size	Width	WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm <sup>2</sup>
EPIN-1.25-AF	1.9	12	22-16	0.5-1.0
EPIN-2-AF	1.9	12	16-14	1.5-2.5
EPIN-5.5-AF	2.7	14	12-10	4-6


Terminal material: Copper  
Insulation material: Vinyl



## BULLET TERMINAL-FEMALE

Part No.	Width	WIRE SIZE	
	W(mm)	AWG	DIN mm <sup>2</sup>
F1.25-A	3.8	22-16	0.5-1.0
F2-A	3.8	16-14	1.5-2.5
F2-A5	4.9		
F5.5-A	4.9	12-10	4-6


Terminal material: Brass  
Insulation material: Vinyl



## PIGGY BACK DISCONNECTS

Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
MF-1.25-7A	6.35X0.8	22-16	0.5-1.0
MF2-7A	6.35X0.8	16-14	1.5-2.5
MF5.5-7A	6.35X0.8	12-10	4-6

Terminal material: Brass  
Insulation material: Vinyl



## NON INSULATED FEMALE LUG

Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
1.25-7A	7.0X0.8	22-16	0.5-1.0
2-7A	7.0X0.8	16-14	1.5-2.5
5.5-7A	7.0X0.8	12-10	4-6


Terminal material: Brass



## BLADE TERMINAL

Part No.	DIMENSION		WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm <sup>2</sup>
BD1-10	2.3	10	22-16	0.5-1.0
BD1-18	2.2	18		
BD2-10	2.4	10	16-14	1.5-2.5
BD2-18	2.4	18		
BD5-10	2.8	10	12-10	4-6
BD5-18	2.8	18		


Terminal material: Copper



## BLADE INSULATED TERMINAL

Part No.	DIMENSION		WIRE SIZE	
	W(mm)	L(mm)	AWG	DIN mm <sup>2</sup>
BD1-10F	2.3	10	22-16	0.5-1.0
BD1-18F	2.2	18		
BD2-10F	2.4	10	16-14	1.5-2.5
BD2-18F	2.4	18		
BD5-10F	2.8	10	12-10	4-6
BD5-18F	2.8	18		


Terminal material: Copper  
Insulation material: Vinyl



## LIPPED BLADE TERMINAL

Part No.	DIMENSION			WIRE SIZE	
	W(mm)	L(mm)	T(mm)	AWG	DIN mm <sup>2</sup>
LB1-3	3.0	16.8	1.3	22-16	0.5-1.0
LB1-4	4.6	16.8	1.3		
LB2-3	3.0	16.8	1.3	16-14	1.5-2.5
LB2-4	4.6	16.8	1.3		
LB5-3	3.0	17.2	1.3	12-10	4-6
LB5-4	4.6	17.2	1.3		

Terminal material: Copper



## LIPPED BLADE INSULATED TERMINAL

Part No.	DIMENSION			WIRE SIZE	
	W(mm)	L(mm)	T(mm)	AWG	DIN mm <sup>2</sup>
LB1-3F	3.0	16.8	1.3	22-16	0.5-1.0
LB1-4F	4.6	16.8	1.3		
LB2-3F	3.0	16.8	1.3	16-14	1.5-2.5
LB2-4F	4.6	16.8	1.3		
LB5-3F	3.0	17.2	1.3	12-10	4-6
LB5-4F	4.6	17.2	1.3		


Terminal material: Copper  
Insulation material: Vinyl



## FULLY INSULATED FEMALE QUICK CONNECTORS


Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
PV1.25-3A	2.8X0.5	22-16	0.5-1.0
PV1.25-3A8	2.8X0.8		
PV1.25-5A	4.8X0.5		
PV1.25-5A8	4.8X0.8		
PV1.25-7A	6.35X0.8	16-14	1.5-2.5
PV2-3A	2.8X0.5		
PV2-3A8	2.8X0.8		
PV2-5A	4.8X0.5		
PV2-5A8	4.8X0.8	12-10	4-6
PV2-7A	6.35X0.8		
PV5.5-7A	6.35X0.8		

Terminal material: Brass  
Insulation material: Vinyl



## B-TYPE BUTT SPLICE


Part No.	DIMENSION		WIRE SIZE	
	D(mm)	L(mm)	AWG	DIN mm <sup>2</sup>
B-1.25	3.3	14.5	22-16	0.5-1.0
B-2	4.0	14.5	16-14	1.5-2.5
B-3.5	4.5	14.5	14-12	2.5-4
B-5.5	5.0	14.5	12-10	4-6
B-8	6.4	20.0	8	10
B-14	8.0	25.0	6	16
B-22	10.4	28.0	4	25
B-38	12.3	31.0	2	35
B-60	14.5	34.0	1/0	50
B-70	16.2	35.0	2/0	70
B-80	18.0	36.0	3/0	95
B-100	20.8	37.0	4/0	120
B-125	23.0	44.0		
B-150	24.8	52.0	250-300MCM	150
B-180	26.6	55.0	300-350MCM	185
B-200	30.6	61.0	400MCM	240
B-250	30.6	61.0	400MCM	240
B-325	35.0	70.0	500-600MCM	300



Terminal material: Copper

## PARALLEL SPLICE

Part No.	DIMENSION		WIRE SIZE	
	D(mm)	L(mm)	AWG	DIN mm <sup>2</sup>
P-1.25	3.3	8.0	22-16	0.5-1.0
P-2	4.0	8.0	16-14	1.5-2.5
P-3.5	4.5	8.5	14-12	2.5-4
P-5.5	5.0	8.5	12-10	4-6
P-8	6.4	9.5	8	10
P-14	8.0	11.0	6	16
P-22	10.4	13.5	4	25
P-38	12.3	16.5	2	35
P-60	14.5	19.0	1/0	50
P-70	16.2	19.0	2/0	70
P-80	18.0	19.5	3/0	95
P-100	20.8	20.0	4/0	120
P-125	23.0	24.0		
P-150	24.8	27.0	250-300MCM	150
P-180	26.6	28.5	300-350MCM	185
P-200	30.6	32.0	400MCM	240
P-250	30.6	32.0	400MCM	240
P-325	35.0	37.0	500-600MCM	300




Terminal material: Copper

## INSULATED BUTT SPLICE

Part No.	WIRE SIZE	
	AWG	DIN mm <sup>2</sup>
BF-1.25S	22-16	0.5-1.0
BF-2.0S	16-14	1.5-2.5
BF-5.5S	12-10	4-6


Terminal material: Brass  
Insulation material: Vinyl



## NYLON INSULATED BUTT SPLICE

Part No.	WIRE SIZE	
	AWG	DIN mm <sup>2</sup>
BN-1.25S	22-16	0.5-1.0
BN-2.0S	16-14	1.5-2.5
BN-5.5S	12-10	4-6


Terminal material: Brass  
Insulation material: Nylon



## BUTT SPLICE (WATER PROOF & HEAT SHRINKABLE)

Part No.	WIRE SIZE	
	AWG	DIN mm <sup>2</sup>
BHS-1.25	22-16	0.5-1.0
BHS-2.0	16-14	1.5-2.5
BHS-5.5	12-10	4-6


Terminal material: Copper  
Insulation material: Heat shrinkable tube



## NYLON INSULATED FEMALE LUG

Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
PN1.25-7A	6.35X0.8	22-16	0.5-1.0
PN2-7A	6.35X0.8	16-14	1.5-2.5
PN5.5-7A	6.35X0.8	12-10	4-6


Terminal material: Brass  
Insulation material: Nylon



## NYLON INSULATED MALE LUG

Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
PN1.25-7B	6.35X0.8	22-16	0.5-1.0
PN2-7B	6.35X0.8	16-14	1.5-2.5
PN5.5-7B	6.35X0.8	12-10	4-6


Terminal material: Brass  
Insulation material: Nylon



## FEMALE QUICK CONNECTORS

Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
LV1.25-3A	2.8X0.5	22-16	0.5-1.0
LV1.25-3A8	2.8X0.8		
LV1.25-5A	4.8X0.5		
LV1.25-5A8	4.8X0.8		
LV1.25-7A	7.0X0.8		
LV1.25-8A	8.0X0.8		
LV2-3A	2.8X0.5	16-14	1.5-2.5
LV2-3A8	2.8X0.8		
LV2-5A	4.8X0.5		
LV2-5A8	4.8X0.8		
LV2-7A	7.0X0.8		
LV2-8A	8.0X0.8		
LV5.5-7A	7.0X0.8	12-10	4-6
LV5.5-10A	9.5X0.8		


Terminal material: Brass  
Insulation material: Vinyl



## FEMALE QUICK CONNECTORS EASY ENTRY


Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
ELV1.25-3A	2.8	22-16	0.5-1.0
ELV1.25-3A8	2.8		
ELV1.25-5A	4.8		
ELV1.25-5A8	4.8		
ELV1.25-7A	6.35		
ELV2-3A	2.8		
ELV2-3A8	2.8		
ELV2-5A	4.8		
ELV2-5A8	4.8		
ELV2-7A	6.35		
ELV2-8A	8.0		
ELV2-10A	9.5	12-10	4-6
ELV5.5-7A	6.35		
ELV5.5-10A	9.5		

Terminal material: Brass  
Insulation material: Vinyl



## MALE QUICK CONNECTORS


Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
LV1.25-3B	2.8X0.5	22-16	0.5-1.0
LV1.25-3B8	2.8X0.8		
LV1.25-5B	4.8X0.5		
LV1.25-5B8	4.8X0.8		
LV1.25-7B	6.35X0.8	16-14	1.5-2.5
LV2-3B	2.8X0.5		
LV2-3B8	2.8X0.8		
LV2-5B	4.8X0.5		
LV2-5B8	4.8X0.8	12-10	4-6
LV2-7B	6.35X0.8		
LV5.5-7B	6.35X0.8		



Terminal material: Brass  
Insulation material: Vinyl

## MALE QUICK CONNECTORS EASY ENTRY

Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
ELV1.25-3B	2.8X0.5	22-16	0.5-1.0
ELV1.25-3B8	2.8X0.8		
ELV1.25-5B	4.8X0.5		
ELV1.25-5B8	4.8X0.8		
ELV1.25-7B	6.35X0.8	16-14	1.5-2.5
ELV2-3B	2.8X0.5		
ELV2-3B8	2.8X0.8		
ELV2-5B	4.8X0.5		
ELV2-5B8	4.8X0.8	12-10	4-6
ELV2-7B	6.35X0.8		
ELV5.5-7B	6.35X0.8		




Terminal material: Brass  
Insulation material: Vinyl

## FLAG FEMALE DISCONNECTORS

Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
FL1.25-7A	6.35X0.8	22-16	0.5-1.0
FL2-7A	6.35X0.8	16-14	1.5-2.5


Terminal material: Brass



## NYLON INSULATED FLAG FEMALE DISCONNECTORS


Part No.	NEMA SIZE	WIRE SIZE	
	W x T (mm)	AWG	DIN mm <sup>2</sup>
FLN1.25-7A	6.35X0.8	22-16	0.5-1.0
FLN2-7A	6.35X0.8	16-14	1.5-2.5

Terminal material: Brass  
Insulation material: Nylon



# NON INSULATED CORD END TERMINAL

Terminal material: Copper



Part No.	DIMENSION				WIRE SIZE		Part No.	DIMENSION				WIRE SIZE	
	L	D	D1	D2	AWG	DIN mm <sup>2</sup>		L	D	D1	D2	AWG	DIN mm <sup>2</sup>
EN0.5-6	6						EN6-18	18	3.5	3.9	4.7	#10	6
EN0.5-8	8	1.0	1.3	2.1	#22	0.5	EN10-12	12					
EN0.5-10	10						EN10-15	15	4.5	4.9	5.8	#8	10
EN0.75-6	6						EN10-18	18					
EN0.75-8	8	1.2	1.5	2.3	#20	0.75	EN16-12	12					
EN0.75-10	10						EN16-15	15	5.8	6.2	7.5	#6	16
EN1.0-6	6						EN16-18	18					
EN1.0-8	8	1.4	1.7	2.5	#18	1.0	EN25-15	15					
EN1.0-10	10						EN25-16	16	7.3	7.7	9.5	#4	25
EN1.0-12	12						EN25-18	18					
EN1.5-7	7						EN25-22	22					
EN1.5-8	8	1.7	2.0	2.8	#16	1.5	EN35-16	16					
EN1.5-10	10						EN35-18	18	8.3	8.7	11.0	#2	35
EN1.5-12	12						EN35-20	20					
EN2.5-7	7						EN35-25	25					
EN2.5-8	8	2.2	2.5	3.4	#14	2.5	EN50-18	18					
EN2.5-10	10						EN50-20	20	10.3	10.9	13.0	1/0	50
EN2.5-12	12						EN50-25	25					
EN4-8	8						EN70-22	22	13.5	14.3	15.3	1/0	70
EN4-9	9						EN70-25	25					
EN4-10	10	2.8	3.2	4.0	#12	4.0	EN95-25	25	14.7	15.5	16.6	4/0	95
EN4-12	12						EN95-32	32					
EN4-15	15						EN120-30	30					
EN4-18	18						EN120-32	32	16.7	17.6	18.6		120
EN6-10	10						EN120-34	34					
EN6-12	12	3.5	3.9	4.7	#10	6.0	EN150-32	32	19.5	20.5	21.5	250 MCM	150
EN6-15	15						EN150-38	38					

# CABLE LUG-HIGH VOLTAGE

Tolerance: ±2mm

Part No.	DIMENSION			WIRE SIZE	
	L(mm)	D(mm)	D1(mm)	AWG	DIN mm <sup>2</sup>
BL-8	52	4.0	6.2	#8	10
BL-14	50	6.0	8.8	#6	16
BL-22	55	7.7	10.5	#4	25
BL-38	64	9.8	12.4	#2	35
BL-60	71	11.0	14.0	1/0	50
BL-80	75	13.1	16.0	3/0	70
BL-100	75	14.0	18.0	4/0	95
BL-125	87	15.6	20.0	4/0	120
BL-150	95	17.0	22.0	300MCM	150
BL-180	98	18.2	23.0	350MCM	185
BL-200	105	20.0	25.8	400MCM	240
BL-250	115	22.0	28.2	500MCM	240
BL-325	120	24.2	32.0	600MCM	300
BL-400	130	29.3	36.3	800MCM	400
BL-500	150	31.0	40.0	1000MCM	500





Terminal material: Copper



## INSULATED CORD END TERMINAL

Terminal material: Copper  
Insulation material: Nylon




T:French Color / W:German Color / DIN:DIN Color

Part No.	DIMENSION			WIRE SIZE		INSULATED COLOR		
	L	L1	D	AWG	DIN mm <sup>2</sup>	T	W	DIN
ET0.25-6	10	6.0	0.75	#26	0.25	Violet	Light Blue	-
ET0.25-8	12	8.0						
ET0.34-6	10	6.0	0.8	#24	0.34	Pink	Turkis	-
ET0.34-8	12	8.0						
ET0.5-6	12	6.0	1.0	#22	0.5	White	Orange	White
ET0.5-8	14	8.0						
ET0.5-10	16	10.0						
ET0.75-6	12	6.0	1.2	#20	0.75	Sky Blue	White	Grey
ET0.75-8	14	8.0						
ET0.75-10	16	10.0						
ET0.75-12	18	12.0	1.4	#18	1.0	Red	Yellow	Red
ET1.0-6	12	6.0						
ET1.0-8	14	8.0						
ET1.0-10	16	10.0	1.7	#16	1.5	Black	Red	Black
ET1.0-12	18	12.0						
ET1.5-8	14	8.0						
ET1.5-10	16	10.0	2.2	#14	2.5	Grey	Blue	Blue
ET1.5-12	18	12.0						
ET1.5-18	24	18.0						
ET2.5-8	14	8.0	2.8	#12	4	Orange	Grey	Grey
ET2.5-10	16	10.0						
ET2.5-12	18	12.0						
ET2.5-18	24	18.0	3.5	#10	6	Green	Black	Yellow
ET4-10	17	10.0						
ET4-12	20	12.0						
ET4-18	26	18.0	4.5	#8	10	Brown	Ivory	Red
ET6-12	20	12.0						
ET6-18	26	18.0						
ET10-12	22	12.0	5.8	#6	16	Ivory	Green	Blue
ET10-18	28	18.0						
ET16-12	24	12.0						
ET16-18	28	18.0	7.3	#4	25	Black	Brown	Yellow
ET25-16	30	16.0						
ET25-18	30	18.0						
ET25-22	35	22.0	8.3	#2	35	Red	Beige	Red
ET35-16	30	16.0						
ET35-18	32	18.0						
ET35-25	39	25.0	10.3	1/0	50	Blue	Olive	Blue
ET50-20	36	20.0						
ET50-25	40	25.0						
ET70-21	37	21.0	13.5	2/0	70	-	-	Yellow
ET95-25	44	25.0	14.7	4/0	95	-	-	Red
ET120-27	48	27.0	16.7		120	-	-	Blue
ET150-32	58	32.0	19.5	250MCM	150	-	-	Yellow

# CABLE LUG

Terminal material: Copper




Part No.	Stud Size	DIMENSION				WIRE SIZE		Part No.	Stud Size	DIMENSION				WIRE SIZE	
		L	D	D1	D2	AWG	DIN mm <sup>2</sup>			L	D	D1	D2	AWG	DIN mm <sup>2</sup>
C2.5-5	5.3	8.0	18.0	2.7	3.9	16-14	2.5	C120-16	17.0	28.0	60.0	15.7	19.4	4/0	120
C4-5	5.3	10.0	20.0	3.0	4.5	12-10	4	C150-12	13.0	30.5	69.0	17.2	21.2	300MCM	150
C6-5	5.3	10.0	23.0	4.0	5.5	12-10	6	C150-14	15.0	30.5	69.0	17.2	21.2		
C10-6	6.4	10.0	25.0	4.5	6.2	#8	10	C150-16	17.0	30.5	69.0	17.2	21.2	350MCM	185
C10-8	8.4	12.6	25.0	4.5	6.2			C185-12	13.0	34.0	78.0	19.2	23.5		
C16-6	6.4	10.0	30.0	5.4	7.1	#6	16	C185-14	15.0	34.0	78.0	19.2	23.5	500MCM	240
C16-8	8.4	12.6	30.0	5.4	7.1			C185-16	17.0	34.0	78.0	19.2	23.5		
C25-6	6.4	12.6	35.0	6.8	8.8	#4	25	C240-10	10.5	38.5	92.0	21.7	26.5	600MCM	300
C25-8	8.4	12.6	35.0	6.8	8.8			C240-12	13.0	38.5	92.0	21.7	26.5		
C25-10	10.5	15.0	35.0	6.8	8.8	#2	35	C240-14	15.0	38.5	92.0	21.7	26.5	800MCM	400
C35-6	6.4	15.0	38.0	8.4	10.6			C240-16	17.0	38.5	92.0	21.7	26.5		
C35-8	8.4	15.0	38.0	8.4	10.6	1/0	50	C240-18	19.0	38.5	92.0	21.7	26.5	1000MCM	500
C35-10	10.5	15.0	38.0	8.4	10.6			C300-12	13.0	43.5	101.0	24.5	30.0		
C50-8	8.4	18.0	43.0	9.7	12.4	2/0	70	C300-14	15.0	43.5	101.0	24.5	30.0	630	800
C50-10	10.5	18.0	43.0	9.7	12.4			C300-16	17.0	43.5	101.0	24.5	30.0		
C50-12	13.0	18.0	43.0	9.7	12.4	3/0	95	C400-14	15.0	53.0	114.0	29.5	36.5	-	-
C70-8	8.4	21.0	50.0	11.8	14.7			C400-16	17.0	53.0	114.0	29.5	36.5		
C70-10	10.5	21.0	50.0	11.8	14.7	4/0	120	C400-18	19.0	53.0	114.0	29.5	36.5	-	-
C70-12	13.0	21.0	50.0	11.8	14.7			C500-14	15.0	56.0	124.0	31.0	39.0		
C95-10	10.5	25.5	58.0	14.2	17.4	-	-	C500-16	17.0	56.0	124.0	31.0	39.0	-	-
C95-12	13.0	25.5	58.0	14.2	17.4			C500-18	19.0	56.0	124.0	31.0	39.0		
C120-10	10.5	28.0	60.0	15.7	19.4			C630-20	21.0	63.5	130.0	35.0	44.0		
C120-12	13.0	28.0	60.0	15.7	19.4			C800-20	21.0	73.0	140.0	40.0	50.0		
C120-14	15.0	28.0	60.0	15.7	19.4										

## CROSS-REFERENCE OF WIRE RANGE

Sq (Taiwan/Japan)	AWG (America)	Drahtgrobereich mm <sup>2</sup> (England)	DIN Querschnitt mm <sup>2</sup> (Germany)
0.5	26-2	0.1-0.4	0.14/0.20/0.25/0.36
1.25	22-16	0.4-1.0	0.5/0.75/1.0
2	16-14	1.1-2.6	1.5-2.5
2	16-14HD	1.1-2.6	1.5-2.5
5.5	12-10	2.7-6.6	4-6
8	8	6.7-10.5	10
14	6	10.6-16.7	16
22	4	16.8-26.6	25
38	2	26.7-42.4	35
60	1/0	42.5-60.5	50
70	2/0	60.6-76.2	70
80	3/0	76.3-97.0	95
100	4/0	98.0-120	120
150	250-300 MCM	121-151	150
180	300-350 MCM	152-192	185
200	400MCM	193-242	240
325	500-600 MCM	243-304	300

## CABLE LUG & TWIN CABLE LUG

Terminal material: Copper

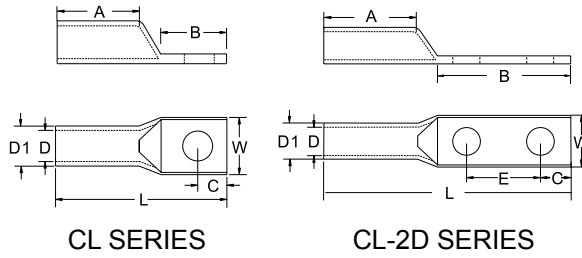

Part No.	Stud Size	DIMENSION								WIRE SIZE	
		W	A	B	C	E	L	D	D1	AWG	DIN mm <sup>2</sup>
CL14-8	8.4	12.0	28.5	16	8	-	50	5.8	8.8	#6	10.6-16.7
CL14-8-2D				80	12	45.0	120				
CL22-8	8.4	15.0	28.5	18	8.5	-	55	8.0	10.6	#4	16.8-26.6
CL22-8-2D				80	12	45.0	120				
CL22-10	10.5	15.0	28.5	18	8.5	-	55	8.0	10.6	#2	26.7-42.4
CL22-10-2D				80	12	45.0	120				
CL38-10	10.5	18.3	32.0	24	10	-	64	9.8	12.4	#2	26.7-42.4
CL38-10-2D			31.7	80	12	45.0	120				
CL38-12	13.0	18.3	32.0	24	10	-	64	9.8	12.4	1/0	42.5-60.5
CL38-12-2D			31.7	80	12	45.0	120				
CL60-10	10.5	20.5	36.0	22	10	-	70	11.0	14.0	3/0	76.3-97.0
CL60-10-2D			40.0	75	12	45.0	130				
CL70-12	13.0	21.4	38.0	26	10	-	72	12.0	15.0	4/0	96.3-117
CL70-12-2D			40.0	80	12	45.0	130				
CL80-12	13.0	23.2	38.0	26	13	-	75	13.0	16.0	250MCM	127
CL80-12-2D			50.0	80	16	45.0	130				
CL100-12	13.0	26.0	40.0	26	13	-	75	14.0	18.0	300MCM	152
CL100-12-2D			50.0	80	16	45.0	132				
CL125-12	13.0	28.0	40.0	32	13	-	85	16.0	20.0	350MCM	177
CL125-12-2D			50.0	80	16	45.0	135				
CL150-12	13.0	31.0	46.0	32	16	-	94	17.0	22.0	400MCM	203
CL150-12-2D			50.0	80	16	45.0	150				
CL180-12	13.0	33.0	46.0	32	16	-	98	18.2	23.0	500MCM	253
CL180-12-2D			50.0	80	16	45.0	150				
CL200-12	13.0	36.0	48.0	36	16	-	104	20.0	26.0	650MCM	325
CL200-12-2D			50.0	80	16	45.0	150				
CL250-12	13.0	40.0	48.0	40	18	-	114	22.0	28.0	800MCM	500
CL250-12-2D			50.0	80	16	45.0	150				
CL325-12	13.0	45.0	50.0	50	20	-	118	25.0	32.0	1000MCM	500
CL325-12-2D			55.0	89	16	45.0	180				
CL400-12	13.0	48.0	60.0	54	22	-	130	30.0	37.0	1000MCM	500
CL400-12-2D			90	18	45.0	180					
CL500-12	13.0	56.0	60.0	60	24	-	150	31.0	40.0	1000MCM	500
CL500-12-2D			93	21	45.0	180					



**HAYATA P.C. ENTERPRISE CO., LTD.**

NO. 276, WENHUA RD., CHIALI DIST., TAINAN TAIWAN

E-mail: [bandex@mail.bandex.com.tw](mailto:bandex@mail.bandex.com.tw)

[www.bandex.com.tw](http://www.bandex.com.tw)

